

# RESX07-1U22R

## 22" Deep, Rear I/O Rugged Rack Server

Low-latency,  
high-throughput rugged  
rack server

- Dual Intel® 3rd generation Xeon® Scalable processors up to 32 cores
- Designed, tested and manufactured in the U.S.
- Configurable - up to 6 expansion slots that support 1 NVIDIA A100 GPU
- NVMe storage – up to 8 E1.L SSDs



### TECHNICAL SPECIFICATIONS

Dual Intel 3rd generation Xeon Scalable processors

3 UPI links up to 11.2 GT/s

20 DIMM slots, up to 2,560 GB  
DDR4-3200 MHz

Intel Trusted Execution Technology (TXT) with integrated TPM 2.0

### Management and Operating System

Windows, Linux OS

Contact factory for OpenBMC

IPMI 2.0 management

### Expansion and Modular Maintainability

Up to 6 expansions slots:

- Slot 1: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO  
*(not available on 1U22RB)*
- Slot 2: PCIe gen 4.0 dual-width x16 FHHL, up to 7.5" w/ no IO  
*(only available on 1U22RA)*
- Slot 3: PCIe gen 4.0 dual-width x16 FHHL, up to 7.5" w/ FIO  
*(not available on 1U22RC)*
- Slot 4: PCIe gen 4.0 single-width x16 HHHL, up to 7.0" w/ RIO
- Slot 5: PCIe gen 4.0 single-width x8 HHHL, up to 7.5" w/ RIO

- Slot 6: OCP3.0 PCIe gen 4.0 x16 w/ RIO

Up to 4, 2.5" SATA/SAS drives (U.2 option available) or 8 E1.L NVMe storage drives

Up to 2 M.2 slots

### Power Supply Options

Non-redundant AC and DC power options:

- 1000 W 120 VAC
- 1300 W 240 VAC
- 1000 W 48 VDC
- 750 W 28 VDC

### Environmental\*

#### Operating

Temperature: 0°C to 50°C, configuration dependent

Humidity: 5% - 95%, non-condensing

Shock: 3 axis, 35 g, 25 ms

Vibration: 4.7 Grms vertical, 4.5 Grms longitudinal, 5 Hz to 2000 Hz

#### Non-Operating

Temperature: -40°C to 70°C, configuration dependent

Humidity: 5% to 95%, non-condensing

Partnering with



RESX07-1U22R

Additional Options


- Shock pins
- Slide rails
- Cable accessories

Mechanical

- Height: 1U or 1.75" (44.45 mm)
- Width: 17.36" (440.9 mm)
- Depth: 22" (558.8 mm) from front to back, 21" (533.4 mm) from ear to back
- Weight (Typical)\*: 27 lb
- 19" rackmountable

\*Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Product Naming Chart

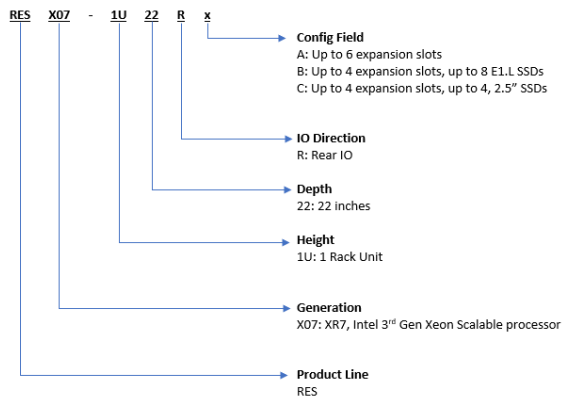

RESX07-1U22RA



Front View



Rear View

RESX07-1U22RB



Front View



Rear View



Corporate Headquarters

50 Minuteman Road  
 Andover, MA 01810 USA  
 +1 978.967.1401 tel  
 +1 866.627.6951 tel  
 +1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38  
 PO Box 584  
 CH-1212 Grand-Lancy 1  
 Geneva, Switzerland  
 +41 22 884 51 00 tel

Learn more

Visit: [mrcy.com/servers](http://mrcy.com/servers)

Contact: [servers@mrcy.com](mailto:servers@mrcy.com)



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, and BuiltSECURE. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

