

# ARES3100

## Advanced Radar Environment Simulator

Delivering industry-leading performance out of the box

- Configurable up to 4 simultaneous channels and 8 targets per channel
- Robust, user-friendly GUI and real-time operation
- Options for EA techniques for real-world jamming imitation



**The ARES3100 advanced radar environment simulator** brings Mercury's proven DRFM-based technology to an out-of-the-box simulator system. By applying the latest in multi-target and complex threat emulation technology to a standard product, the ARES3100 minimizes program cost and schedule without sacrificing performance. This creates a system that requires significantly shorter development times yet produces more rapid and thorough radar system testing overall.

### FEATURES

Supports free-space test environments

Modular/configurable design

Windows-based graphical user interface (GUI)

Comprehensive BIT and calibration included in software

### Operation

Up to 4 simultaneous channels

Up to 8 targets per channel

Each channel can be a target, ECM, clutter or chaff simulation

Wide variety of ECM techniques and target modulation

Instantaneous bandwidth of 850MHz

Output power level base system equal to 0 dBm, other output levels available upon request

Controllable output power range of 100dB, with 0.25 dB resolution

Hardware in the loop (HWIL) with facility control

Real-time external or local host control

Real-time, runtime displays of SUT, targets, ECM, etc.

High-speed scenario update rate

High reliability

Data logging for post-test correlation

## Applications

Free-space test configurations  
Radar performance evaluation  
ECM vulnerability assessment  
Radar production testing  
ECCM training/tactics development  
Air defense personnel training  
Receiver/processor development

## Scenario

Standard 1 channel, options to  
4 channels

Up to 8 targets per channel


Up to 32 targets per scenario with  
4 channel option

Standard targets, jammers, ECM or EA,  
weather, and chaff options supported

Clutter models available

## Available Interfaces

External computer control  
Jammer in the loop interfaces  
IRIG A/B/G for synchronization

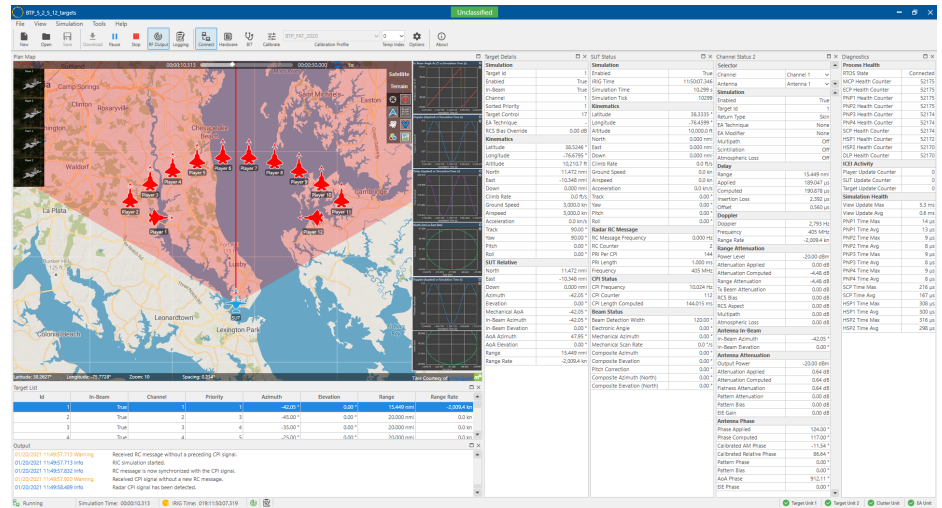

RES GUI Screen

## Signal Fidelity

Operation frequency coverage of  
2-18GHz, standard, <2GHz and >18GHz  
supporting options available

A/A doppler shift of  $\pm 2$  MHz

Range and doppler ambiguities are  
correct for all PRFs

Output noise floor  $\leq -108$  dBm/Hz with  
signal output power of -10 dBm

## Options

Geometry modeling 6DoF, Aspect  
dependent RCS & JEM optional

External jamming assets

Combination coherent and  
non-coherent



## Corporate Headquarters

50 Minuteman Road  
Andover, MA 01810 USA  
+1 978.967.1401 tel  
+1 866.627.6951 tel  
+1 978.256.3599 fax

## International Headquarters Switzerland

Avenue Eugène-Lance, 38, PO Box 584  
CH-1212 Grand-Lancy 1 - Geneva  
Switzerland  
+41 22 884 51 00 tel

## Learn more

Visit: [mrcy.com/ares3100](http://mrcy.com/ares3100)



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, and BuiltSECURE. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

