

Drop-in Isolator SMF635F1800




Specifications are subject to change without notice

Specifications (+25°C)

Parameter	Value
RF Frequency	18 GHz to 21 GHz
Isolation	20 dB (min)
Insertion Loss	0.7 dB (max)
VSWR	1.3:1
Peak Power	5 Watts (max)
Average Power	0.5 Watts (max)
Power Forward	0.5 Watts (max)
Power Reverse	0.5 Watts (max)
Operating Temperature	-40 to +85°C
Package Size	0.25 x 0.50 x 0.18"

Outline Drawing

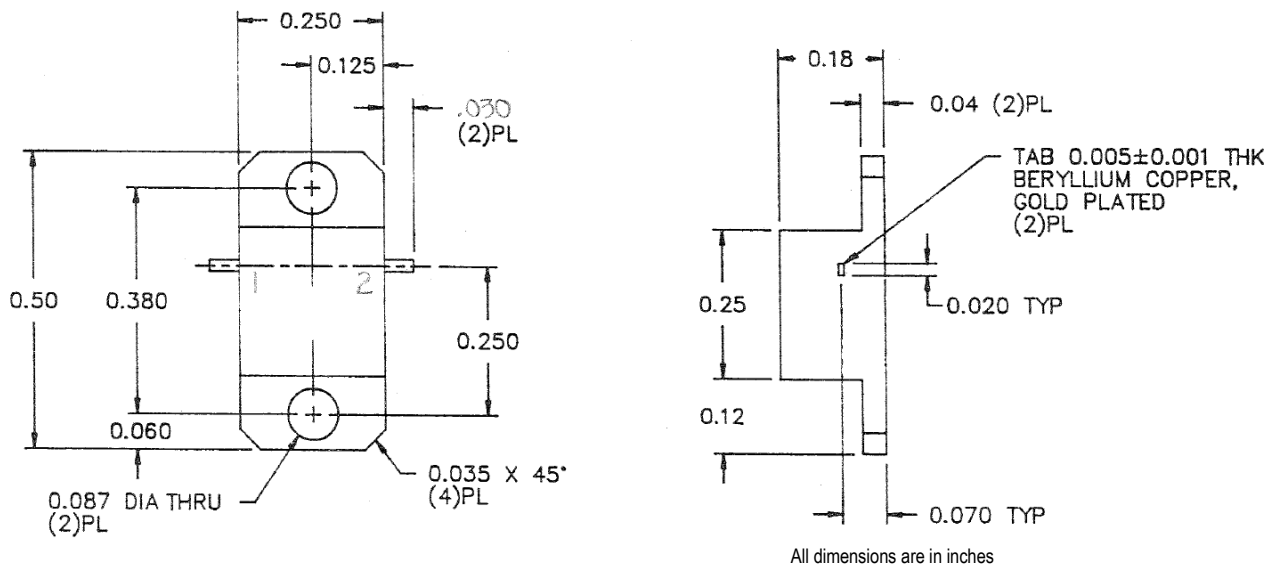

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.

