

Models 5792 and 5892

High-speed synchronizer and distribution board – 6U VPX

Simultaneous synthesis of up to four or eight high-speed boards

- Synchronized sampling and data acquisition
- Synchronizes gating and triggering functions
- Clock rates up to 1.8 GHz
- Front panel MMCX connectors for input signals



The 5792 and 5892 High-Speed Synchronizer and Distribution 6U VPX boards synchronize multiple Mercury Cobalt or Onyx boards within a system. They enable synchronous sampling and timing for a wide range of multichannel high-speed data acquisition, DSP, and software radio applications.

Up to four or eight boards can be synchronized using these models, with each receiving a common clock along with external signals that can be used for synchronizing, triggering and gating functions.


INPUT SIGNALS

These models provide three front panel MMCX connectors to accept input signals from external sources: one for clock, one for gate or trigger and one for a synchronization signal. Clock signals can be applied from an external source such as a high performance sine-wave generator. Gate/trigger and sync signals can come from an external system source. In addition to the MMCX connector, a reference clock can be accepted through the first front panel μ Sync output connector, allowing a single Cobalt, Onyx, and Jade board to generate the clock for all subsequent boards in the system.

OUTPUT SIGNALS

These models provide four front panel μ Sync output connectors, compatible with a range of high-speed Cobalt, Onyx, and Jade boards. The μ Sync signals include a reference clock, gate/trigger and sync signals and are distributed through matched cables, simplifying system design.

BLOCK DIAGRAM

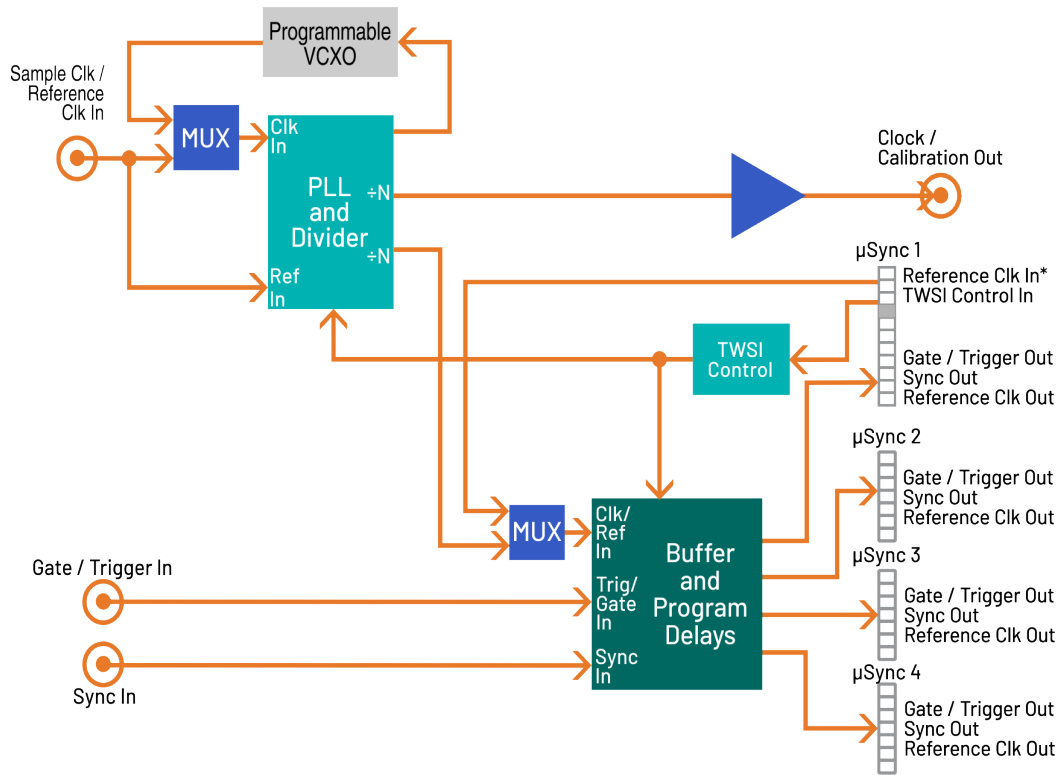

Model 5892 doubles all resources.

CLOCK SIGNALS

These models can accept a user-supplied external clock on their front panel MMCX connector. As an alternative to the external clock, they can use the on-board programmable voltage controlled crystal oscillator (VCXO) as the clock source. The VCXO can operate alone or be locked to a system reference clock signal delivered to the front panel reference clock input.

The external or on-board clock can operate at full rate or be divided and used to register all sync and gate/trigger signals as well as providing a reference clock to all connected boards. In addition, the clock is available at the Clock Out MMCX as a sample or reference clock for other boards in the system.

GATE AND SYNCHRONIZATION SIGNALS

These models feature separate inputs for gate/trigger and sync signals. A programmable delay allows the user to make timing adjustments on the gate/trigger and sync signals before they are sent to buffers for output through the μSync output connectors.

CALIBRATION

These models feature a calibration output specifically designed to work with the 52640 or 52740 3.6 GHz A/D board and provide a signal reference for phase adjustment across multiple D/As.

PROGRAMMING

These models allow programming of operating parameters including: VCXO frequency, clock dividers, and delays that allow the user to make timing adjustments on the gate and sync signals. These adjustments are made before they are sent to buffers for output through the μSync connectors.


Both models are programmed via a TWSI control interface on the first μSync connector. The control interface is compatible with the front panel μSync connectors of all high-speed Cobalt, Onyx, and Jade modules, thereby providing a single cable connection that carries both control and timing signals.

SUPPORTED PRODUCTS

These models support all high-speed models in the Cobalt and Onyx families including the 57630 and 58630 1 GHz A/D and D/A 6U VPX boards; the 57730 and 58730 1 GHz A/D and D/A 6U VPX boards; the 57640 and 58640 3.6 GHz A/D 6U VPX boards; the 57740 and 58740 3.6 GHz A/D 6U VPX boards; the 57670 and 58670 four-channel 1.25 GHz, 16-bit D/A 6U VPX boards; the 57670 and 58670 four-channel 1.25 GHz, 16-bit D/A 6U VPX boards; and the 57770 and 58770 four-channel 1.25 GHz, 16-bit D/A 6U VPX boards.

FRONT PANEL CONNECTIONS

The front panel includes four μ Sync input/output connectors, four MMCX connectors, and two LEDs. Note that the μ Sync output connectors are custom-wired and NOT compatible with standard μ HDMI cables. Use the cables described in Accessories.

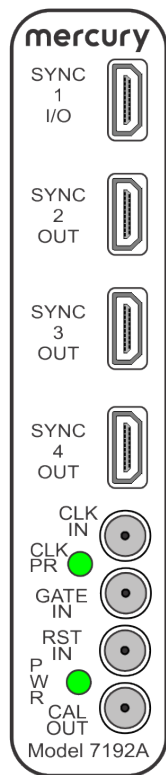

- **Synchronization In/Out:** A μ Sync 19-pin connector, labeled **SYNC I/O**, provides a reference clock input and TWSI control input; and sync, reference clock, and gate outputs for synchronizing multiple boards. This connector includes TWSI (I2C) bus pins which allow a Cobalt or Onyx board to control the 7192.
- **Synchronization Outputs:** Three front-panel μ Sync 19-pin connectors, labeled **SYNC 2 OUT**, **SYNC 3 OUT**, and **SYNC 4 OUT**, provide sync, reference clock, and gate outputs for synchronizing multiple Cobalt or Onyx boards.
- **Sample Clock / Reference Input:** An MMCX connector, labeled **CLK IN**, is used for a sample clock or reference input.
- **Clock Present LED:** A green LED labeled **CLK PR** illuminates when the sample clock is working.
- **Gate/Trigger Input:** An MMCX connector, labeled **GATE IN**, is used for a gate/trigger

LVTTL input (do not exceed 3.3V).

- **SYNC Input:** An MMCX connector, labeled **SYNC IN**, is used for a sync LVTTL input (do not exceed 3.3V).
- **Power LED:** A green LED labeled **PWR** illuminates when a +5VDC is applied to the board.
- **Clock/Calibration Output:** An MMCX connector, labeled **CAL OUT** is used for clock/calibration output.

SPECIFICATIONS

Front Panel Sample Clock/Reference Input

- Connector Type: MMCX
- Input Impedance: 50 ohms
- Input Level: 0 dBm to +10 dBm, sine wave
- Sample Clock Frequency: 100 MHz to 2 GHz
- Reference Frequency: 5 to 100 MHz

Front Panel Gate/Trigger and μ Sync Inputs

- Connector Type: MMCX
- Input Level: LVTTL

Front Panel Gate/Trigger and μ Sync Inputs/Outputs

- Quantity: 5792: four; 5892: eight
- Connector type: 19-pin μ HDMI
- Signal Level: CML
- Signals (μ Sync connector 1): Reference Clock In, TWSI control In, Reference Clock Out, Gate/Trigger Out, Sync Out
- Signals (μ Sync connectors 2-4): Reference Clock Out, Gate/Trigger Out, Sync Out

Front Panel Clock / Calibration Output

- Connector Type: MMCX
- Output Impedance: 50 ohms
- Output Level: +6 dBm nominal, sine wave
- Sample Clock Frequency: 100 MHz to 1.8 GHz

Programmable VCXOs

- Frequency Ranges: 10-945 MHz, 970-1134 MHz, and 1213-1417.5 MHz
- Tuning Resolution: 32 bits
- Unlocked Accuracy: +20 ppm

PLL, Divider and Jitter Cleaner

- Type: Texas Instruments CDCM7005
- Frequency Dividers: 1, 2, 3, 4, 6, 8 and 16

PCI Express Interface

- PCI Express Bus: x4, x8, power only

Environmental

- Operating Temp: 0° to 50° C
- Storage Temp: -20° to 90° C
- Relative Humidity: 0 to 95%, non-cond.

Size

233 mm x 160 mm (9.173 in. x 6.299 in.)

ORDERING INFORMATION

Model	Description
5792	High-Speed Synchronizer and Distribution Board - 6U VPX Single Density
5892	High-Speed Synchronizer and Distribution Board - 6U VPX Double Density

ACCESSORY PRODUCTS

Model	Description
	4 ea. 18" μSync cables are supplied; additional cables may be ordered:
2192-018	μSync cable - 18"
2192-036	μSync cable - 36"

LIFETIME SUPPORT

Mercury offers worldwide customers shorter development time, reliable, rugged solutions for a variety of environments, reduced costs, and mature software development tools. We offer free lifetime support for this product from our engineering staff, which customers can depend on through phone and email, as well as software updates. Take advantage of our 40 years of experience in delivering high-performance radar, communications, SIGINT, EW, and data acquisition MIL-Aero solutions worldwide.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International
 Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
+41 22 884 5100 tel

Learn more

Visit: mrcy.com/go/MP5792

For technical details, contact:

mrcy.com/go/CF5792



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, Jade, Cobalt, Onyx, GateFlow, ReadyFlow, and Navigator. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

