

# Talon RTR 2749

3.6 GS/sec ultra wideband RF/IF  
rugged rackmount recorder

Recording system for  
ultra-wideband analog  
RF/IF signals

- Sampling up to 3.6 GHz in single-channel mode; up to 1.8 GHz in dual-channel mode
- Real-time aggregate recording rates of up to 4.8 GB/sec
- Up to 243 TB of SSD storage




**The Talon® RTR 2749 is a turnkey system, used for recording high-bandwidth signals.** The RTR 2749 uses 12-bit, 3.6 GHz A/D converters. It can be configured as a one- or two-channel system and can record sampled data, packed as 8-bit- or 16-bit-wide consecutive samples (12-bit digitized samples residing in the 12 MSBs of the 16-bit word). A high-speed RAID array provides a maximum streaming recording rate to disk of 4.8 GB/sec.

The RTR 2749 uses Mercury's high-powered Kintex UltraScale-based Jade® boards or Virtex-7-based Onyx® boards, which provide the data streaming engine for the high-speed A/D converters. Channel and packing modes as well as gate and trigger settings are among the GUI-selectable system parameters, providing complete control over this ultra wideband recording system.

Optional GPS time and position stamping allows the user to capture this critical information in the header of each data file.

## FEATURES

- Designed to operate under conditions of shock and vibration
- Sample rates up to 3.6 GHz in single-channel mode
- Sample rates up to 1.8 GHz in dual-channel mode
- Capable of recording RF/IF frequencies to 1.75 GHz in single-channel mode
- Capable of recording RF/IF frequencies to 2.8 GHz in dual-channel mode
- 12-bit A/D, with 16- and 8-bit packing modes
- Real-time aggregate recording rates of up to 4.8 GB/sec
- 4U 19-inch rugged rackmount PC server chassis
- Windows® workstation with high performance Intel® processor
- Up to 243 terabytes of SSD storage to NTFS RAID solid state disk array
- RAID levels of 0, 5, and 6
- SystemFlow® GUI with signal viewer analysis tool
- C-callable API for integration of recorder into application
- File headers include time stamping and recording parameters
- Optional GPS time and position stamping

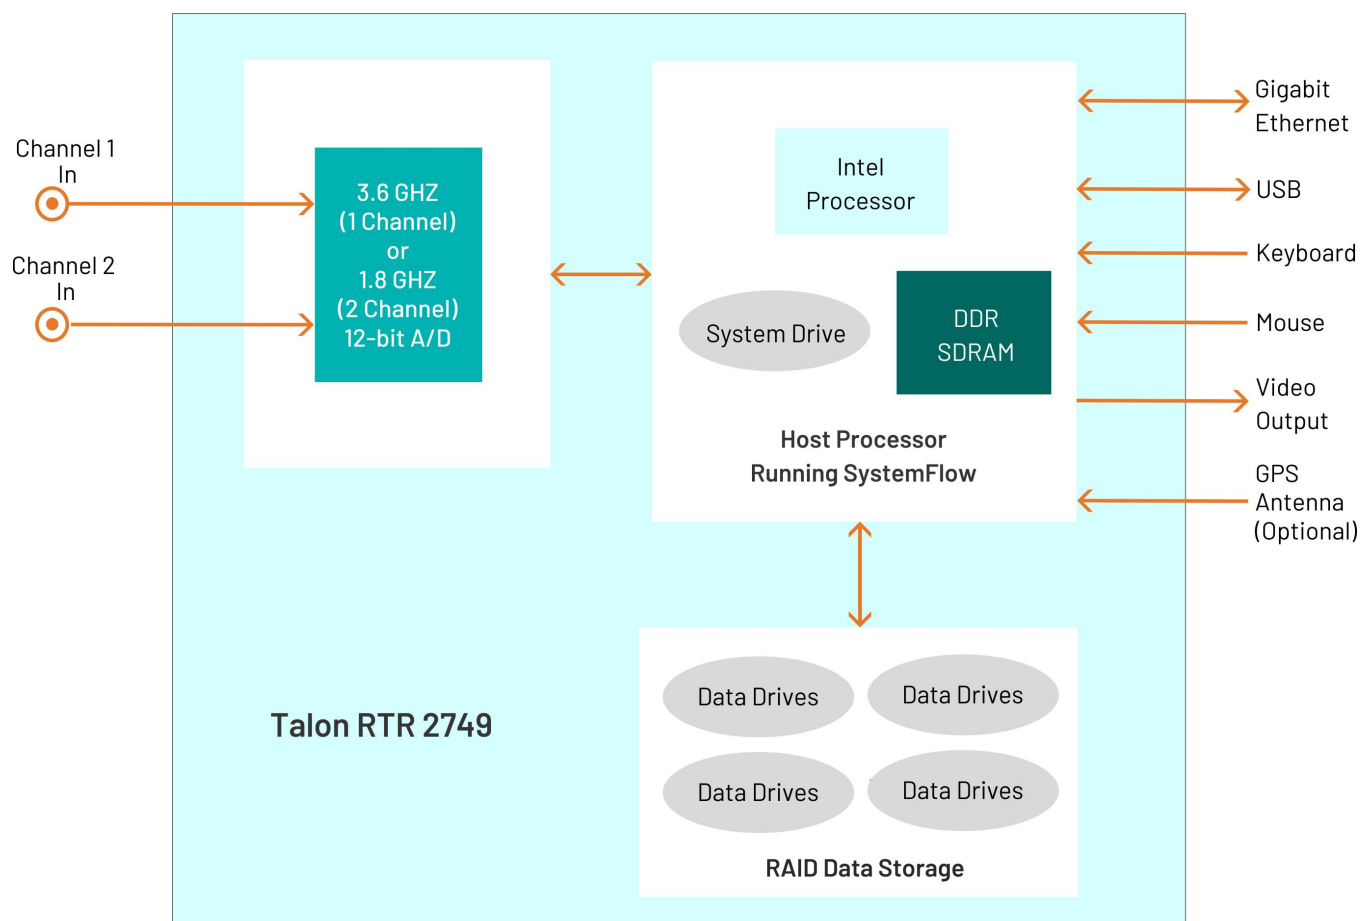

## RUGGED AND FLEXIBLE ARCHITECTURE

Because SSDs operate reliably under conditions of vibration and shock, the RTR 2749 performs well in ground, shipborne and airborne environments. The hot-swappable SSDs provide storage capacity of up to 243 TB. The drives can be easily removed or exchanged during or after a mission to retrieve recorded data.

The RTR 2749 is configured in a 4U 19-inch rugged rackmount chassis, with hot-swappable data drives, front panel USB ports, and I/O connectors on the rear panel. Systems are scalable to accommodate multiple chassis to increase channel counts and aggregate data rates. All recorder chassis are connected via Ethernet and can be controlled from a single GUI either locally or from a remote PC.

RAID levels 0, 5, and 6 provide a choice for the required level of redundancy.

## SYSTEMFLOW SOFTWARE

All Talon recorders include the Mercury SystemFlow<sup>®</sup> recording software. SystemFlow software enables users to configure and control a Talon recorder:

- The SystemFlow GUI provides a point-and-click user interface. It includes Configure, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to configure parameters, control and monitor a recording, and play back a recorded stream.
- SystemFlow API provides a set of C-callable libraries that allow engineers to develop their own user interface to configure and control their Talon recorder. Additional high-level libraries, like Python, are available upon request.

The SystemFlow GUI and API can be run from a remote connection over Gigabit Ethernet. Recorders can be set up to run autonomously by implementing scripts using the API interface.

Talon systems record all data to the native NTFS file system, allowing for quick and easy access to the data from any computer. A simple header that holds the recording parameters is added to the beginning of each file. An optional GPS receiver allows the user to precisely timestamp files and optionally track the recorder's position throughout a mission.

## SYSTEMFLOW SIMULATOR

To learn more about SystemFlow software, contact Mercury at [techsales@mercy.com](mailto:techsales@mercy.com). The SystemFlow Simulator allows you to learn how to use a Talon recorder's SystemFlow software interface before you acquire a recorder or while you are waiting for delivery of a recorder.

The Simulator can simulate the operating environment of all the different Talon recorder models. The Simulator also demonstrates the SystemFlow Signal Viewer by playing recorded signals to simulate the appearance of live signals being digitized and recorded by a Talon analog signal recorder.


### Features

- Provides real-time recording system simulation
- Allows engineers to write and test their application (built using the SystemFlow API) before receiving the recorder hardware
- Demonstrates SystemFlow signal and file viewer tool
- Capable of simulating all Talon analog and digital recording systems
- Full Talon SystemFlow GUI
- Simulator can be used to develop Talon system profiles for use in the final system

## SYSTEMFLOW RECORDER INTERFACE

The RTR 2749 GUI provides the user with a control interface for the recording system. It includes Configuration, Record, Playback and Status screens, each with intuitive controls and indicators. The user can easily move between screens to set configuration parameters,

control and monitor a recording, play back a recorded signal and monitor board temperature and voltage levels. The signal viewer, integrated into the recording GUI, allows the user to monitor real-time signals or signals recorded on disk.

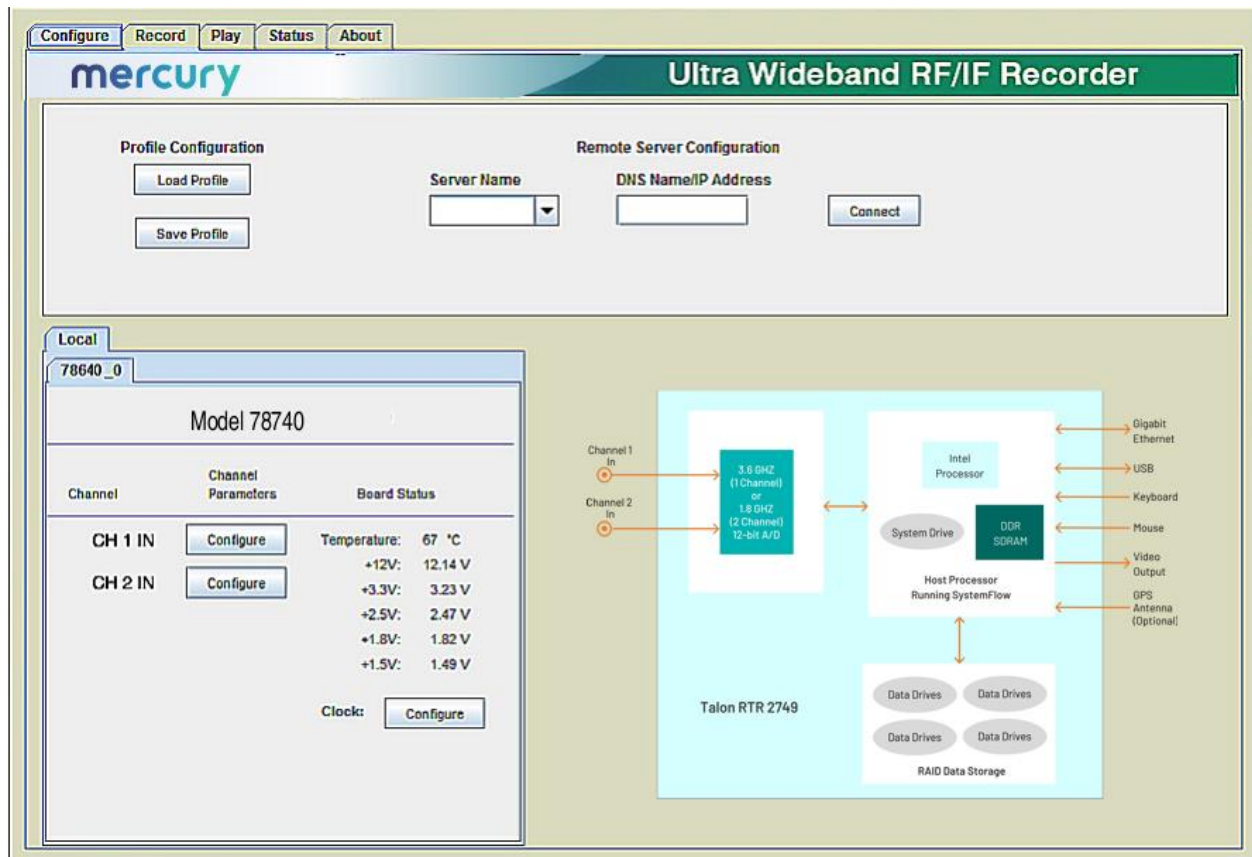

SETTING SYSTEM PARAMETERS

The RTR 2749 configuration GUI provides a simple and intuitive means for setting up the system parameters such as channel mode, clock frequency, downconversion, and gate/trigger mode.

All parameters contain limit-checking and integrated help. Details about each field on the configuration screens are provided in the RTR 2749 user manual.

78741 Board Parameters

Channel Mode:

Dual

Clock Source:

External

Clock Frequency:

800.0

MHz

Downconversion:

☐

☒ Bandwidth:

640.0

MHz

☐ Decimation:

8

CH1 Center Frequency:

190.0

MHz

CH2 Center Frequency:

190.0

MHz

Packing Mode:

16-bits

Gate / Trigger Mode:

None

Gate / Trigger Polarity:

Negative

Trigger Delay:

0

Samples

A/D Sampling Rate:

800.0

MHz

Disk Data Rate:

800.0

MS/s

OK


Cancel

Apply

## SIGNAL VIEWER

The SystemFlow Signal Viewer includes a spectrogram, virtual oscilloscope, and spectrum analyzer for signal monitoring in both the time and frequency domains. It is extremely useful for previewing live inputs prior to recording, and for monitoring signals as they are being recorded to help ensure successful recording sessions. The viewer can also be used to inspect and analyze the recorded files after the recording is complete.

Advanced signal analysis capabilities include automatic calculators for signal amplitude and frequency, second and third harmonic components, THD (total harmonic distortion), and SINAD (signal to noise and distortion). With time and frequency zoom, panning modes, and dual, annotated cursors to mark and measure points of interest, the SystemFlow Signal Viewer can often eliminate the need for a separate oscilloscope or spectrum analyzer in the field.

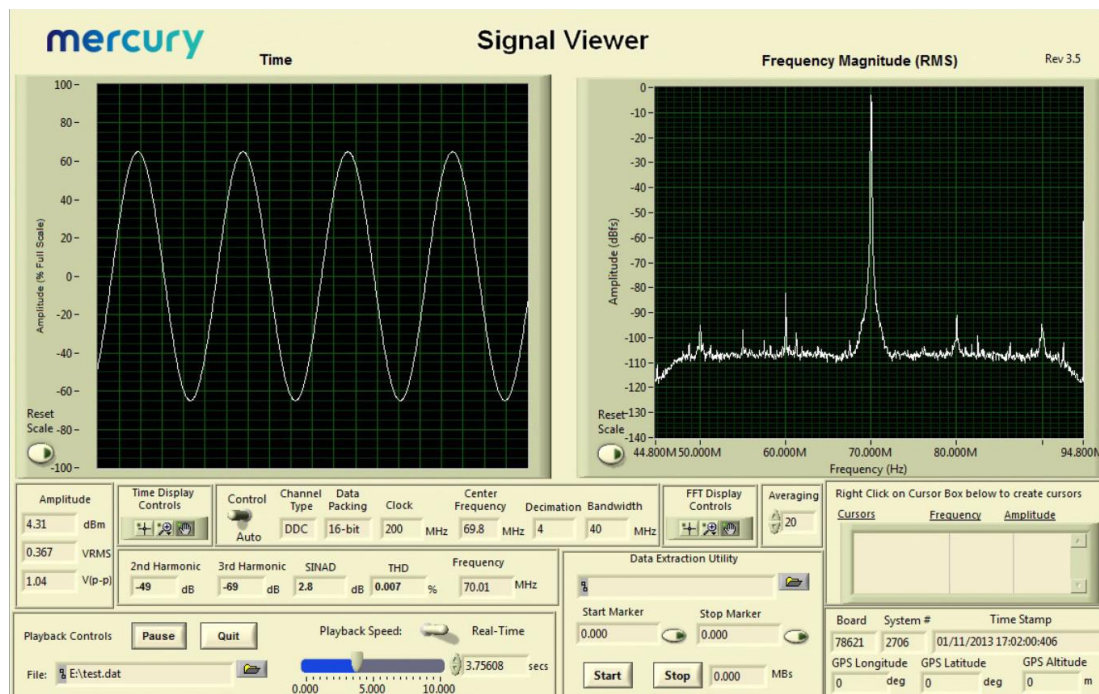



## SYSTEMFLOW API

SystemFlow includes a complete API (Application Programming Interface) supporting control and status queries of all operations of the Talon recorder from a custom application.

High-level C-language function calls and the supporting device drivers allow users to incorporate the RTR 2749 as a high-performance server front end to a larger system. This is

supported using a socket interface through the Ethernet port, either to a local host or through an internet link for remote, standalone acquisition. Recorded NTFS files can be easily retrieved through the same connection. In addition to C, support is also provided for high level languages such as Python and C#. Below is an example of controlling recording via the SystemFlow API.

```

728     }
729     //transfer until end of disk
730     else if (transferType == TRANSFER_END_OF_DISK)
731     {
732         recordParams->transferTime    = 0;           // must set to 0
733         recordParams->transferLength  = 0;           // must set to 0
734     }
735
736     /////////////////////////////////////////////////// Start the record ///////////////////////////////////
737     SetConsoleTextAttribute (hConsole, FOREGROUND_GREEN | FOREGROUND_INTENSITY );
738     printf("\nCase 6: RTS_Record\n");
739     SetConsoleTextAttribute (hConsole, wOldColorAttrs);
740
741     //trigger immediately
742     if(recordParams->trigger == RTS_TRIGGER_IMMEDIATELY)
743     {
744         //send record command
745         if ((error = RTS_Record(++msgNum,
746                               serverInfo,
747                               recordParams,
748                               recordChanId,
749                               fileName[0])) != RTS_SUCCESS)
750         {
751             printf("Record Error # 0x%lx.\n", error);
752             exitHandler(error);
753             goto freeMem;
754         }
755
756         Sleep(500);
757     }
758
759     //wait for SW trigger
760     else if(recordParams->trigger == RTS_WAIT_FOR_SW_TRIGGER)
761     {
762         //send record command which set up record and start DMA
763         if ((error = RTS_Record(++msgNum,
764                               serverInfo,
765                               recordParams,
766                               recordChanId,
767                               fileName[0])) != RTS_SUCCESS)

```

## SPECIFICATIONS

## PC Workstation

Operating System: Windows®

Processor: Intel Core i7 processor or better

SDRAM: (standard) 8 GB

- Option -309: 16 GB
- Option -310: 32 GB
- Option -311: 64 GB

## RAID

- Storage: 7.6, 15.3, 30.7, 61, 122.8, or 243.3 TB
- Supported RAID Levels: (standard) 0
  - Option -285: RAID 5
  - Option -286: RAID 6
- Drive Type: SATA III or NVME SSDS

## Analog Signal Inputs

Connectors: Two rear panel SSMC connectors, In 1 & In 2

Input Type: Single-ended, non-inverting

Full Scale Input: +4 dBm into 50 ohms

Coupling: Transformer-coupled

Analog Input Transformers

Bandwidth: 4.5 kHz to 3.0 GHz

## A/D Converters

Type: Texas Instruments ADC12D1800

Sampling Rate:

- Single-channel mode: 500 MHz to 3.6 GHz
- Dual-channel mode: 150 MHz to 1.8 GHz
- Resolution: 12 bits

Maximum Usable Input Frequency

- Single-channel mode: 1.75 GHz
- Dual-channel mode: 2.8 GHz

Anti-Aliasing Filters: External, user-supplied

## Digital Downconverters

Decimation: 8, 16 to 512 in Single-Channel Mode, 4, 8 to 256 in Dual-Channel Mode

IF Center Frequency Tuning: DC to  $f_s$ , 32 bits

LO SFDR: >120 db

DDC Usable Bandwidth:  $0.8 \cdot f_s/D$

## Sampling Clock Source

Internal fixed-frequency or programmable oscillator (selectable by option); in single-channel mode, the sample rate is 2x the clock frequency; in dual-channel mode, the sample rate equals the clock frequency

## Frequency Reference

Accepts external 10 MHz reference at 0 to +4 dBm to phase-lock the clock oscillator

## Physical and Environmental

4U Long Chassis: 19" W x 21" D x 7" H

Weight: 50 lb, approx.

Operating Temp: 0° to +50° C

Storage Temp: -40° to +85° C

Relative Humidity: 5 to 95%, non-condensing

Operating Shock: 15 g max. (11 msec, half sine wave)

Operating Vibration: 10 to 20 Hz: 0.02 inch peak, 20 to 500 Hz: 1.4 g peak acceleration

Power Requirements: 100 to 240 VAC, 50 to 60 Hz, 500 W max.

## ORDERING INFORMATION

## Channel Configurations

Option - 201	1-Channel record
Option - 202	2-Channel record (2 Model 78741 or 78841 boards)

## RAID Configurations

Standard	RAID 0 configuration
Option - 285	RAID 5 configuration
Option - 286	RAID 6 configuration

## Memory Options

Standard	8 GB system memory
Option - 309	16 GB system memory
Option - 310	32 GB system memory
Option - 311	64 GB system memory

## Storage Options

Option - 405	1.9 TB SSD storage capacity
Option - 415	7.6 TB SSD storage capacity
Option - 420	15.3 TB SSD storage capacity
Option - 430	30.7 TB SSD storage capacity
Option - 460	61.4 TB SSD storage capacity
Option - 485	122.8 TB SSD storage capacity
Option - 490	243.3 TB SSD storage capacity



## Sample Clock Options

Option -910	<b>User-Programmable Sample Clock</b>  Dual-channel mode sample clock range  150 MHz – 945 MHz  970 MHz – 1134 MHz  1213 MHz – 1417.5 MHz  Single-channel mode sample clock range  500 MHz – 1890 MHz  1940 MHz – 2268 MHz  2426 MHz – 2835 MHz
Option -911	<b>Fixed-Frequency Clock:</b> 1.5 / 3.0 GHz sample clock
Option -912	<b>Fixed-Frequency Clock:</b> 1.6 / 3.2 GHz sample clock
Option -913	<b>Fixed-Frequency Clock:</b> 1.2 / 2.4 GHz sample clock
Option -914	<b>Fixed-Frequency Clock:</b> 1.36 / 2.72 GHz sample clock
Option -915	<b>Fixed-Frequency Clock:</b> 1.8 / 3.6 GHz sample clock
Custom fixed-frequency sample clocks available upon request.	

## General Options (append to all options)

Option -261	GPS time and position stamping
Option -264	IRIG-B time stamping
Option -267	Dual 10 GbE offload
Option -268	40 GbE offload
Option -625	Removable OS drive enclosure
Option -680	28V DC power supply

Contact Mercury for compatible option combinations. Storage and general options may change, so contact Mercury for the latest information.

## LIFETIME SUPPORT FOR TALON PRODUCTS

Mercury offers worldwide customers shorter development time, reliable, rugged solutions for a variety of environments, reduced costs, and mature software development tools. We offer free lifetime support from our engineering staff, which customers can depend on through phone and email, as well as software updates. Take advantage of our 40 years of experience in delivering high-performance radar, communications, SIGINT, EW, and data acquisition MIL-Aero solutions worldwide.



## Corporate Headquarters

50 Minuteman Road  
Andover, MA 01810 USA  
**+1 978.967.1401** tel  
**+1 866.627.6951** tel  
**+1 978.256.3599** fax

## International Headquarters

## Mercury International

Avenue Eugène-Lance, 38  
PO Box 584  
CH-1212 Grand-Lancy 1  
Geneva, Switzerland  
**+41 22 884 5100** tel

## Learn more

Visit: [mrcy.com/go/MP2749](https://mrcy.com/go/MP2749)

## For technical details, contact:

[mrcy.com/go/CF2749](https://mrcy.com/go/CF2749)



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, SystemFlow, and Talon. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

