

# AM1122 – Amplifier

## 20 MHz to 6 GHz Gain Block


### Description

The AM1122 is a cascadable gain block servicing the 20 MHz to 6 GHz frequency range. The device has exceptional second and third order linearity, which makes it ideally suited in highly linear applications. Packaged in a 3mm QFN, the AM1122 represents a compact total PCB footprint.



### Features

- +40 dBm OIP3
- +26 dBm IIP3
- +52 dBm OIP2
- 15 dB Gain
- +26 dBm P1dB
- 4.5 dB Noise figure
- +8.0V Operation
- 1.8 W Power Consumption
- 3mm QFN Ceramic
- -40C to +85C Operation

### Functional Diagram

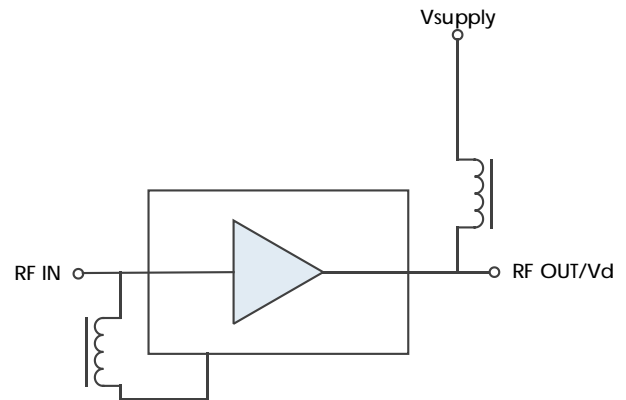

### Characteristic Performance

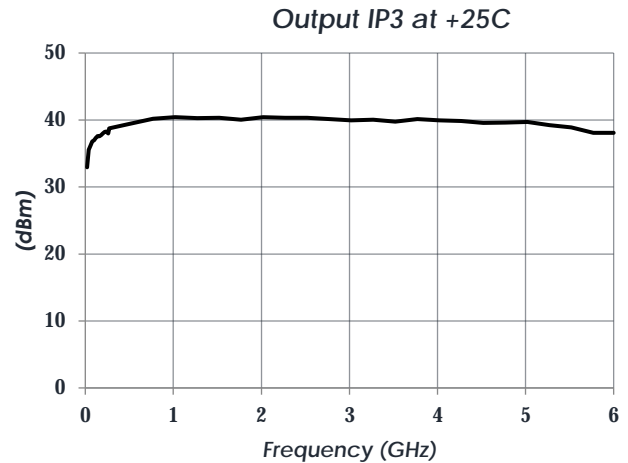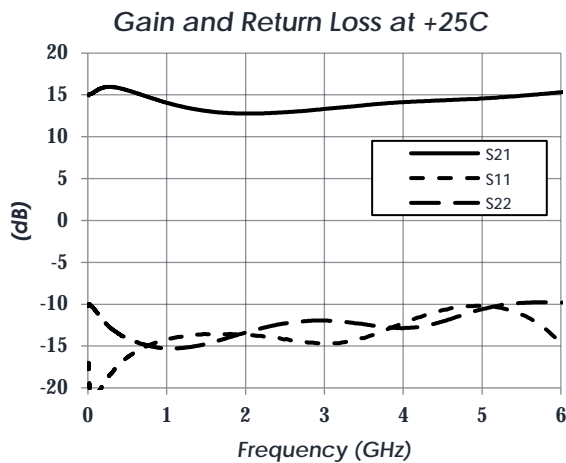

To obtain price, delivery, or to place an order contact [MMICSales@mercy.com](mailto:MMICSales@mercy.com)  
 Atlanta Micro Inc., now a part of Mercury Systems  
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)


## Table of Contents

Description .....	1	Recommended Operating Conditions ...	4
Features .....	1	Thermal Information .....	4
Functional Diagram .....	1	DC Electrical Characteristics .....	5
Characteristic Performance .....	1	RF Performance .....	5
Revision History .....	2	Typical Performance .....	6
Pin Layout and Definitions .....	3	Typical Application .....	8
Specifications .....	4	Evaluation PC Board .....	9
Absolute Maximum Ratings .....	4	Related Parts .....	9
Handling Information .....	4	Component Compliance Information .....	10

## Revision History

Date	Revision Number	Notes
September 23, 2021	1	Initial Release

**Pin Layout and Definitions**

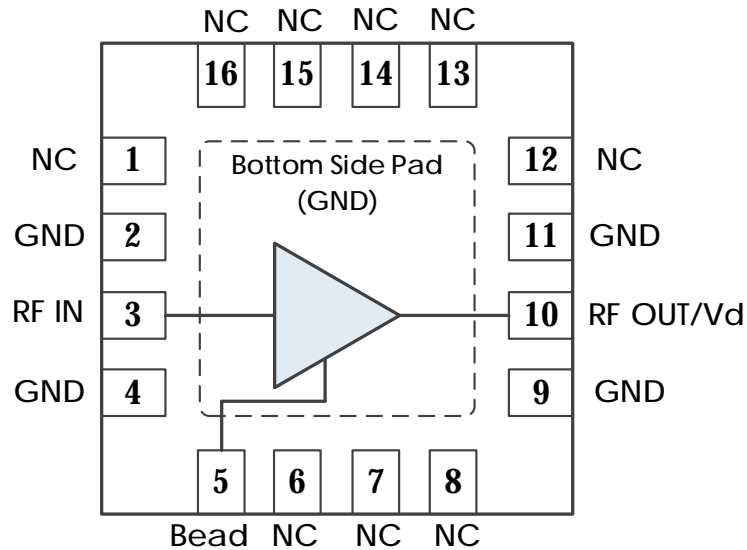

Pin Number	Pin Name	Pin Function
1	NC	No Connect
2	GND	Ground - Common
3	RF IN	RF Input – External DC Blocking Capacitor Required
4	GND	Ground - Common
5	Bead	Connect to RF In through external ferrite bead or large inductor
6-8	NC	No Connect
9	GND	Ground - Common
10	RF OUT	RF Output – External Bias Tee Required
11	GND	Ground - Common
12-16	NC	No Connect

\*Note: NC pins may be grounded or left open

# AM1122 – Amplifier

## 20 MHz to 6 GHz Gain Block



### Specifications

#### Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+8.3 V
RF Input Power		+20dBm
Storage Temperature Range	-55 C	+150 C

**Note:** Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

#### Handling Information

	Minimum	Maximum
Moisture Sensitivity Level	MSL 1	



Atlanta Micro products are electrostatic sensitive.  
Follow safe handling practices to avoid damage

#### Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+7.7V	+8.0 V	+8.3V
Operating Case Temperature	-40 C		+85 C

#### Thermal Information

Junction to Case Thermal Resistance ( $\theta_{JC}$ )	31.6 C/W
Nominal Junction Temperature at +85C Ambient	+141 C
Channel Temperature to Maintain 1 Million Hour MTF	+175 C

To obtain price, delivery, or to place an order contact [MMICSales@mercy.com](mailto:MMICSales@mercy.com)  
Atlanta Micro Inc., now a part of Mercury Systems  
3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)

# AM1122 – Amplifier

## 20 MHz to 6 GHz Gain Block

### DC Electrical Characteristics

(VDD = 8V, ID = 222mA, T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
DC Supply Voltage		+7.7V	+8.0 V	+8.3V
DC Supply Current	VDD = +8.0 V		222mA	
Power Dissipated	VDD = +8.0 V		1.77 W	

### RF Performance

(VDD = 8V, ID = 222mA, T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
Frequency Range		20MHz		6GHz
Gain			+15 dB	
Return Loss			10 dB	
Output IP3			+40 dBm	
Output IP2			+52 dBm	
Output P1dB			+26 dBm	
Noise Figure			+4.5 dB	

### Notes:







- IP3 measured with 10MHz tone spacing
- IP2 characterized with sum and difference measurements
  - IP2 sum measured with 10MHz tone spacing. IM2 measured at  $f_1 + f_2$
  - IP2 difference measured with tones at  $f_1$  and  $f_2 = (2 \times f_1) - 10$ . IM2 measured at  $f_2 - f_1$

# AM1122 – Amplifier

## 20 MHz to 6 GHz Gain Block

### Typical Performance

(VDD = 8V, ID = 222mA, T = 25 °C unless otherwise specified)

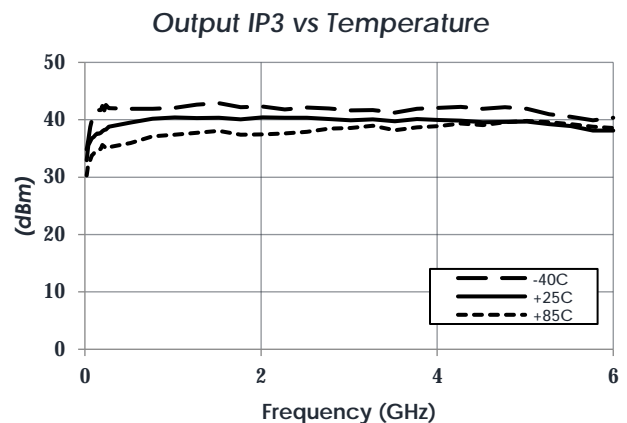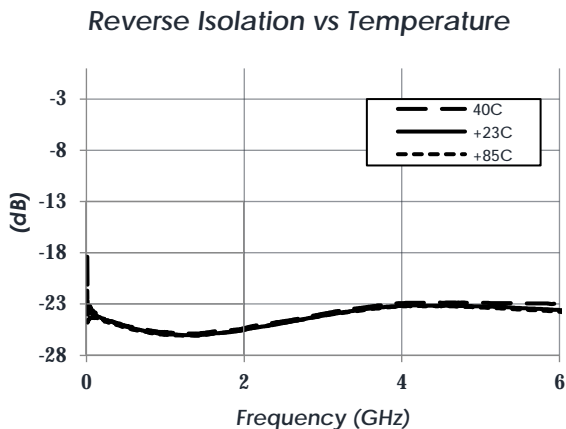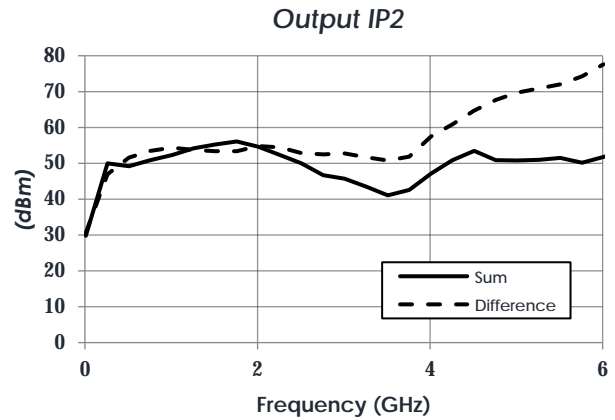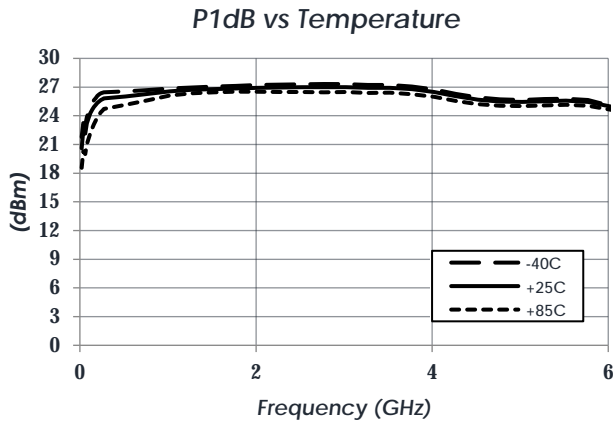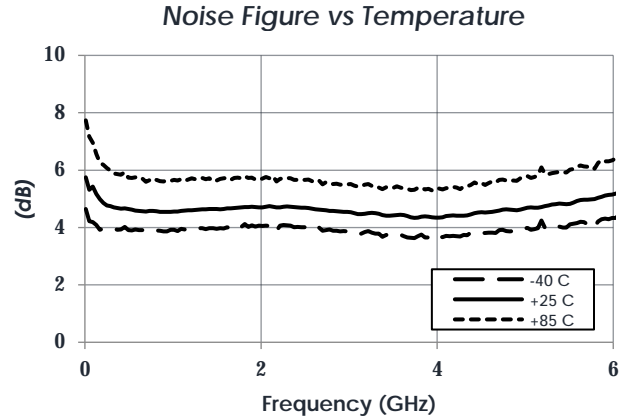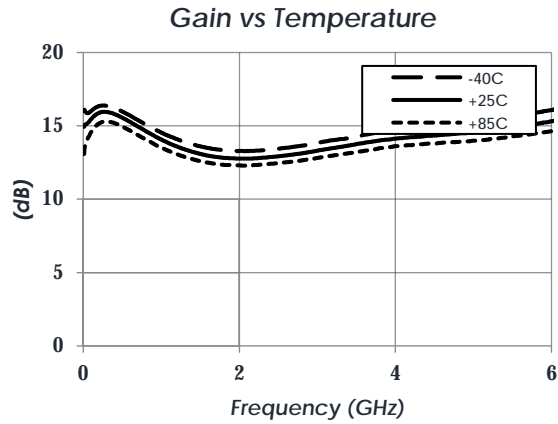


To obtain price, delivery, or to place an order contact [MMICSales@mercy.com](mailto:MMICSales@mercy.com)  
 Atlanta Micro Inc., now a part of Mercury Systems  
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)

# AM1122 – Amplifier



## 20 MHz to 6 GHz Gain Block


### Typical Performance (continued)

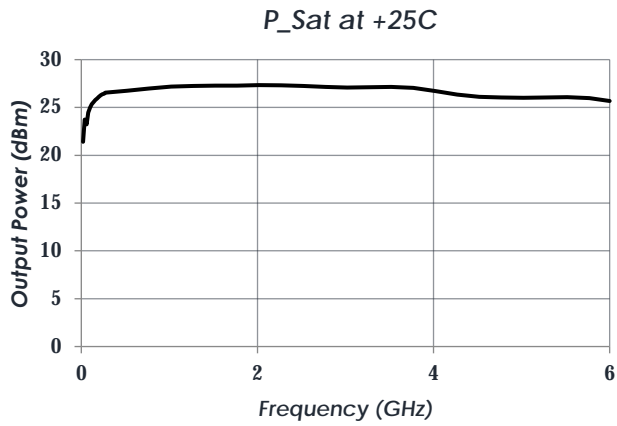

---

To obtain price, delivery, or to place an order contact [MMICSales@rcy.com](mailto:MMICSales@rcy.com)  
Atlanta Micro Inc., now a part of Mercury Systems  
3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)

**Typical Application**

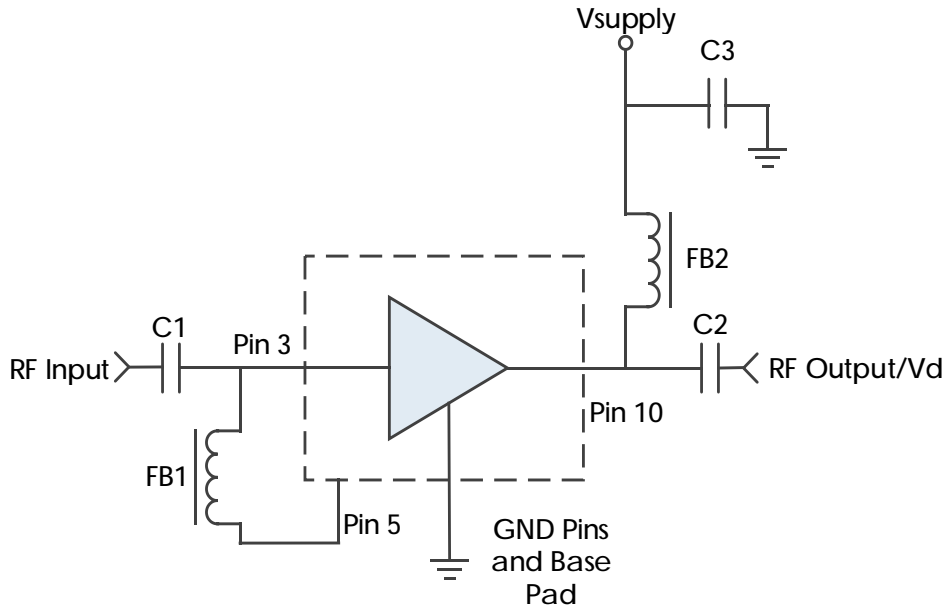

**Recommended Component List (or equivalent):**

Part	Value	Part Number	Manufacturer
C1, C2	0.1 uF	0201BB104KW160	Passives Plus
C3	0.1 uF	GRM155R71C104KA88	Murata
FB1	-	MMZ1005A222E	TDK
FB2	-	BLM15HG102SN1	Murata

**Notes:**

1. NC pins may be grounded or left open
2. DC blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance
3. Low frequency performance may be improved by replacing FB2 with a larger value bead, inductor, or bias tee.

To obtain price, delivery, or to place an order contact [MMICSales@mrchy.com](mailto:MMICSales@mrchy.com)  
 Atlanta Micro Inc., now a part of Mercury Systems  
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)




# AM1122 – Amplifier

## 20 MHz to 6 GHz Gain Block



### Evaluation PC Board

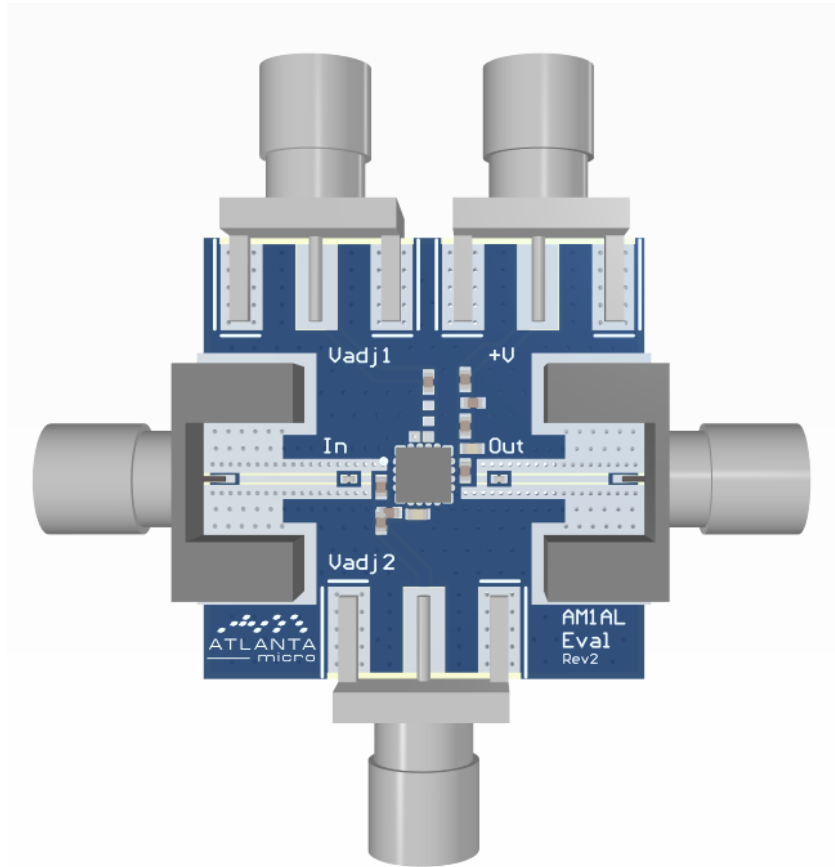

### Related Parts

Part Number	Description
AM1025	0.02GHz to 3GHz Gain Block
AM1082	5GHz to 17GHz Driver Amplifier
AM1090	DC to 6GHz Gain Block
AM1123	0.02GHz to 8GHz Gain Block
AM1127	0.02GHz to 6GHz Gain Block

To obtain price, delivery, or to place an order contact [MMICSales@mercy.com](mailto:MMICSales@mercy.com)  
Atlanta Micro Inc., now a part of Mercury Systems  
3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • [www.atlantamicro.com](http://www.atlantamicro.com)

## Component Compliance Information

**RoHS:** Atlanta Micro, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Atlanta Micro shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

**REACH:** Atlanta Micro, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

**Conflict Materials:** Atlanta Micro does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Atlanta Micro’s supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Atlanta Micro takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.