


# AM1163 – Amplifier

## DC to 10 GHz Gain Block

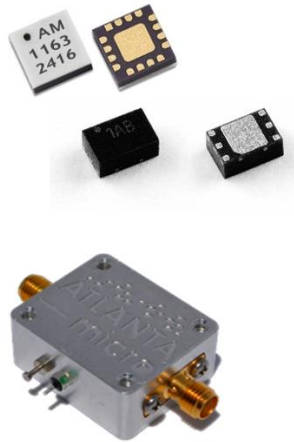


**The AM1163 is a high dynamic range DC-coupled amplifier covering up to 10 GHz.**

The device exhibits a moderate positive gain-slope, providing frequency equalization useful in many broadband applications. AM1163 provides similar performance to Mercury's AM1063 with the benefit of improved low frequency NF. With internal 50Ω matching and packaged in a 1.3mm x 2.0 mm DFN, a 3mm QFN or a shielded module, the AM1163 represents a compact total PCB footprint.



### FEATURES

- 15 dB Gain
- 2.5 dB Noise Figure
- +30 dBm OIP3
- +18 dBm P1dB
- +3.3V or +5.0V Operation
- 3mm QFN
- -40°C to +85°C Operation

### FUNCTIONAL DIAGRAM

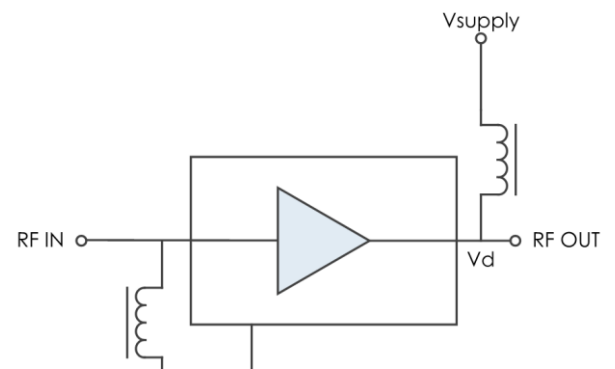

### CHARACTERISTIC PERFORMANCE

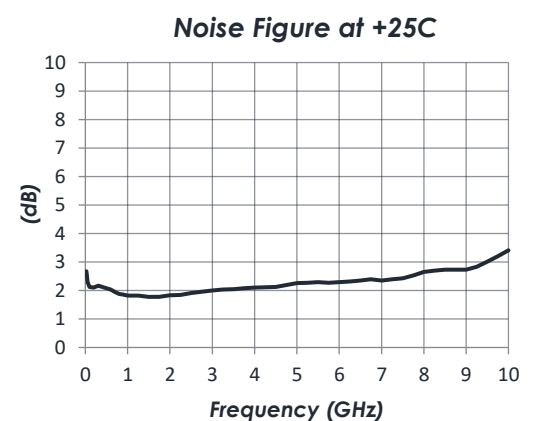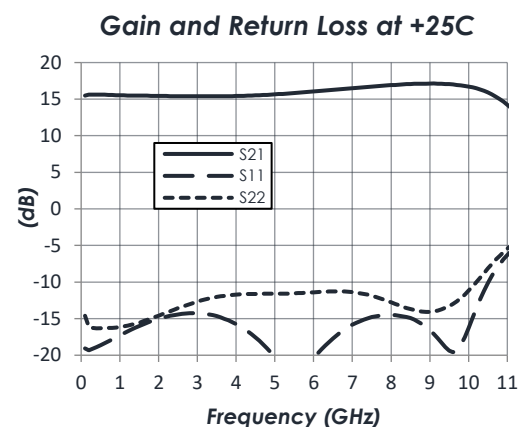

CONTENTS

FEATURES ..... 1

FUNCTIONAL DIAGRAM ..... 1

CHARACTERISTIC PERFORMANCE ..... 1

REVISION HISTORY..... 2

PIN LAYOUT AND DEFINITIONS ..... 3

SPECIFICATIONS..... 5

TYPICAL PERFORMANCE ..... 7

TYPICAL APPLICATION.....10

EVALUATION PC BOARD.....11

PART ORDERING DETAILS .....11

RELATED PARTS.....11


COMPONENT COMPLIANCE INFORMATION .....13

REVISION HISTORY

Date	Revision	Notes
July 23, 2019	1	Initial Release
September 24, 2019	2	Added 1.3mm x 2mm DFN picture to first page. Corrected evaluation board image. 1.3mm x 2mm DFN marking details corrected.
November 26, 2019	2A	Updated Description to include shielded module packaging.
March 18, 2020	3	Storage temperature updated. Package lead finish updated. Module drawing updated.
November 11, 2020	4	Package and Module information moved to main product page on website.
June 18, 2024	5	Changed to Mercury branding. No content changes.
September 17, 2025	6	Updated image for Eval Board Rev2

PIN LAYOUT AND DEFINITIONS

AM1163-1: 3mm QFN

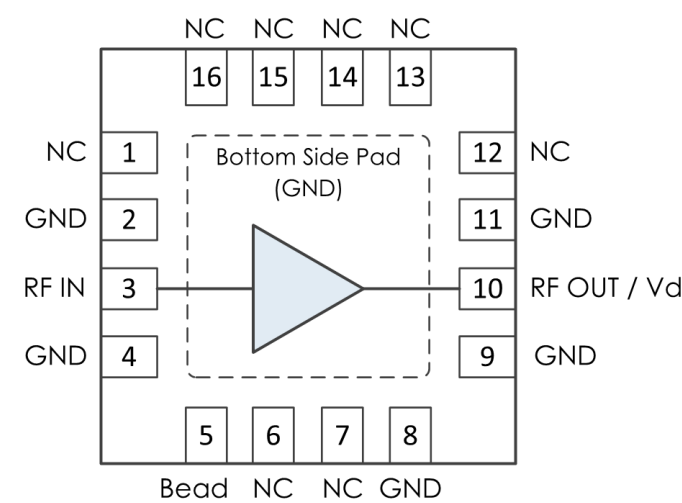


Pin	Name	Function
1	NC	Not Connected *
2	GND	Ground - Common
3	RF IN	RF Input - 50 ohms - DC Coupled, External DC Block Required
4	GND	Ground - Common
5	Bead	Connect to RF In through external ferrite bead or large inductor
6, 7	NC	Not Connected *
8, 9	GND	Ground - Common
10	RF Out / Vd	RF Output - 50 Ohms - DC Coupled. External DC Blocking Capacitor Required
11	GND	Ground - Common
12-16	NC	Not Connected *
Case GND	GND	Ground - Common

\* NC pins may be grounded or left open.

PIN LAYOUT AND DEFINITIONS (CONTINUED)

AM163-2: 1.3mm x 2mm DFN

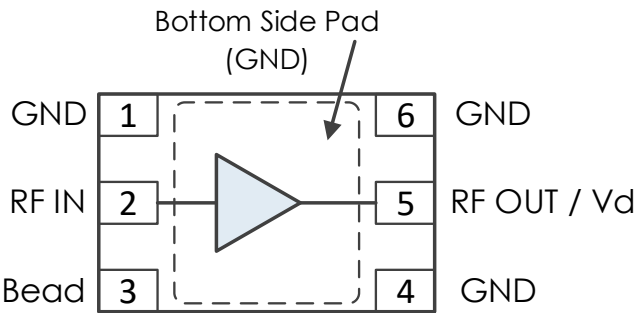

Pin	Name	Function
1	GND	Ground - Common
2	RF IN	RF Input - 50 ohms - DC Coupled, External DC Block Required
3	Bead	Connect to RF In through external ferrite bead or large inductor
4	GND	Ground - Common
5	RF Out	RF Output - 50 Ohms - DC Coupled. External DC Blocking Capacitor Required
6	GND	Ground - Common

## SPECIFICATIONS

## Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+8.0 V
RF Input Power		+20 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-50C	+150 C

**Note:** Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Devices subjected to conditions outside of what is recommended for extended periods may affect device reliability.

## Handling Information

	Minimum	Maximum
Storage Temperature Range (Recommended)	-50 C	+125 C
Moisture Sensitivity Level	MSL 3	



Mercury products are electrostatic sensitive.  
Follow safe handling practices to avoid damage.

## Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+2.7 V		+5.2 V
Operating Case Temperature	-40 C		+85 C
Operating Junction Temperature	-40 C		+125 C

## Thermal Information

Thermal Resistance (°C / W)	
Junction to Case Thermal Resistance ( $\theta_{JC}$ )	88

### DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Supply Voltage		+3.0 V	+4.7 V	+5.0 V
DC Supply Current	VD = +3.1 V		37 mA	
	Vd = 3.3 V		42 mA	
	Vd = 4.7 V		73 mA	
	Vd = 5.0 V		80 mA	
Power Dissipated	Vd = 3.1 V		0.11 W	
	Vd = 3.3 V		0.14 W	
	Vd = 4.7 V		0.34 W	
	Vd = 5.0 V		0.4 W	

### RF Performance

(T = 25 °C unless otherwise specified)





Param	Testing Conditions	Min	Typical	Max
Frequency Range		DC		10 GHz
Gain	VD = +5.0 V		15.0 dB	
Return Loss	VD = +5.0 V		14 dB	
Output IP3			+30 dBm	
Output P1dB			+18 dBm	
Noise Figure			2.5 dB	

#### Notes:


- OIP3 shown was measured at 10 MHz input tone spacing.
- All performance metrics were measured using the recommended MMZ1005A222E ferrite bead connecting RF In and the Bead pin (see Typical Application section).

TYPICAL PERFORMANCE

(Vd = +5.0 V, Id = 80 mA)

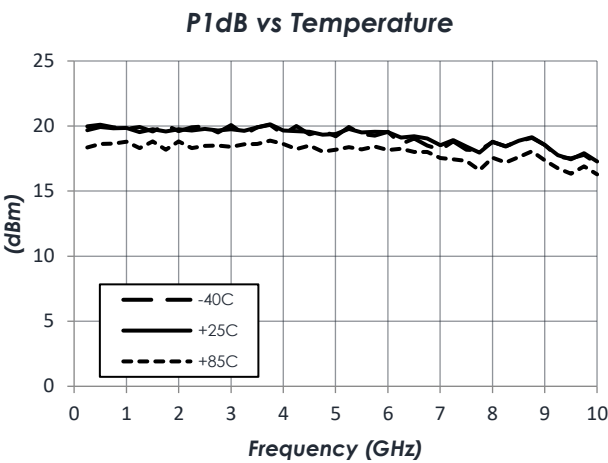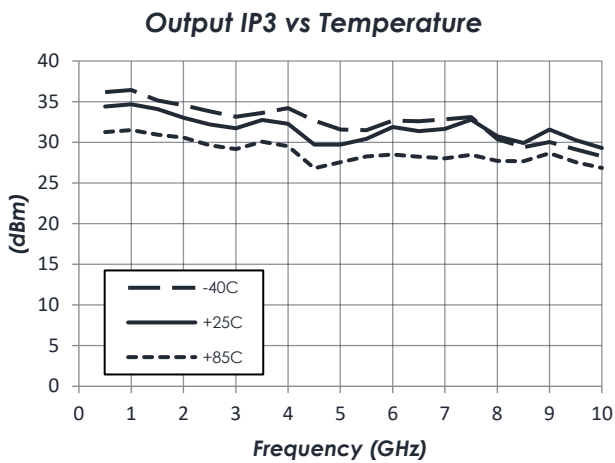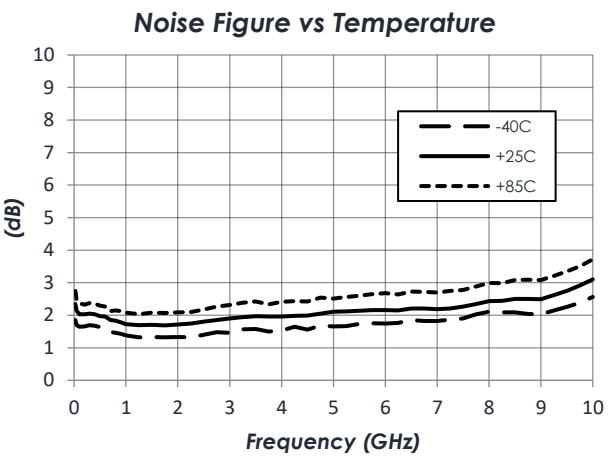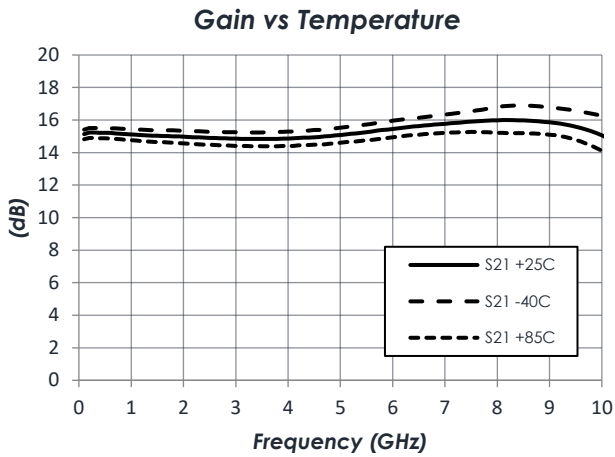

m





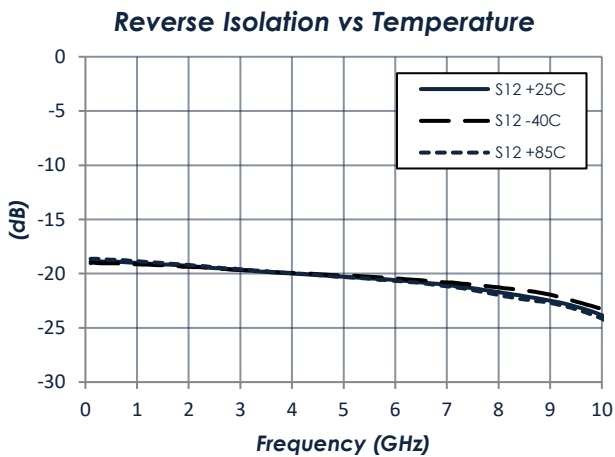


TECHNICAL DATA SHEET




TYPICAL PERFORMANCE (CONTINUED)

Vd = +3.3 V, Id = 42 mA)

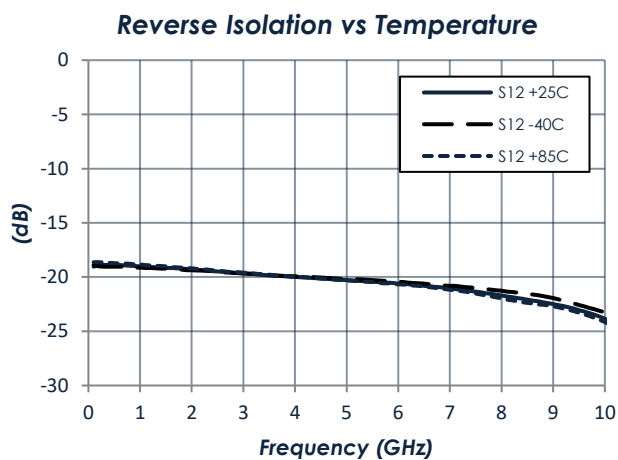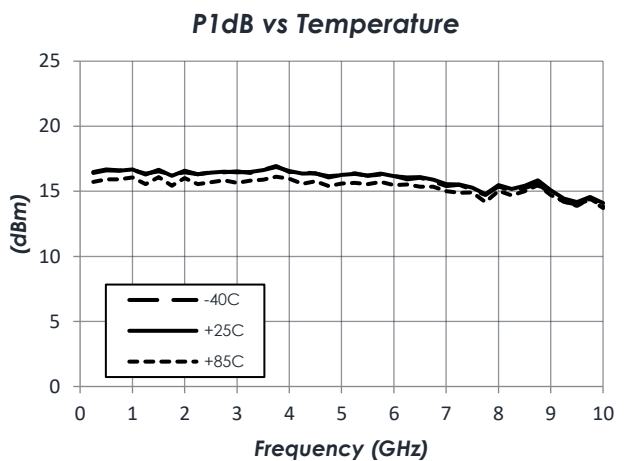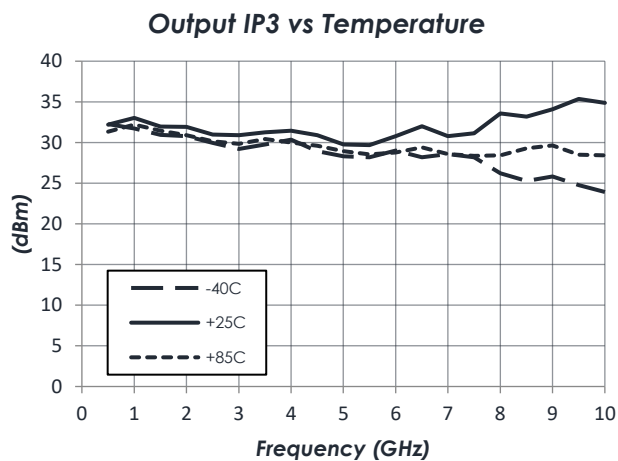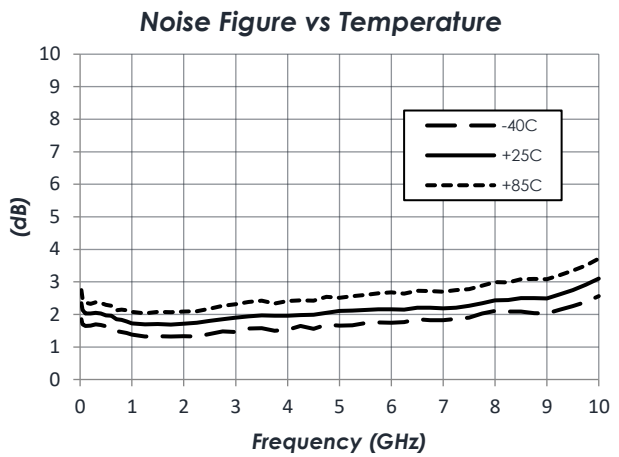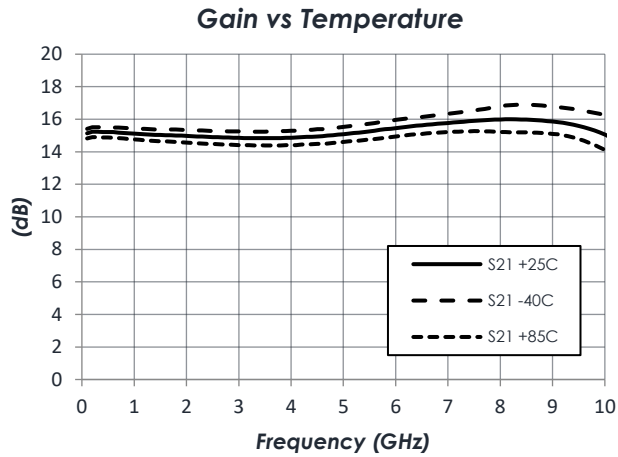

## TYPICAL APPLICATION

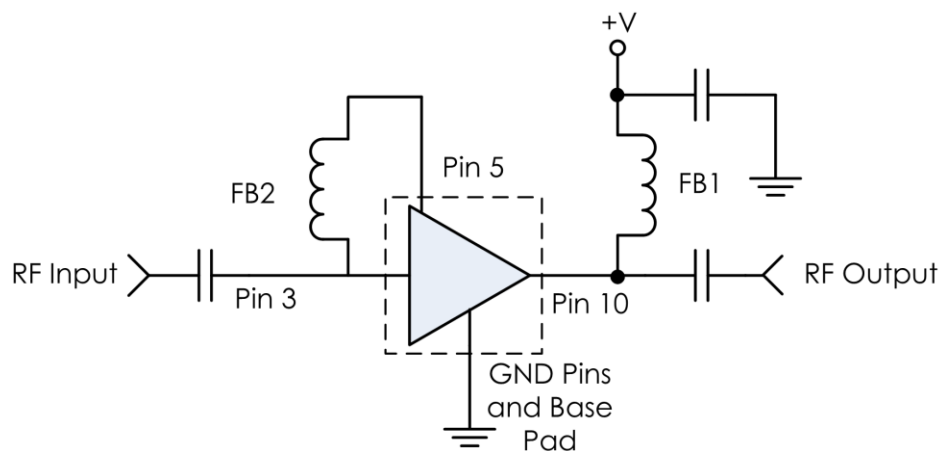


## Recommended Component List (or Equivalent)

Part	Value	Part Number	Manufacturer
C1, C2	0.1 $\mu$ F	0402BB104KW160	Passives Plus
C3	0.1 $\mu$ F	GRM155R71C104KA88	Murata
FB1	-	MMZ1005A222E	TDK
FB2		MMZ1005A222E	TDK

## Notes:

1. NC pins may be grounded or left open.
2. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
3. FB2 can be substituted for a different bead or inductor to extend performance lower in frequency.

EVALUATION PC BOARD

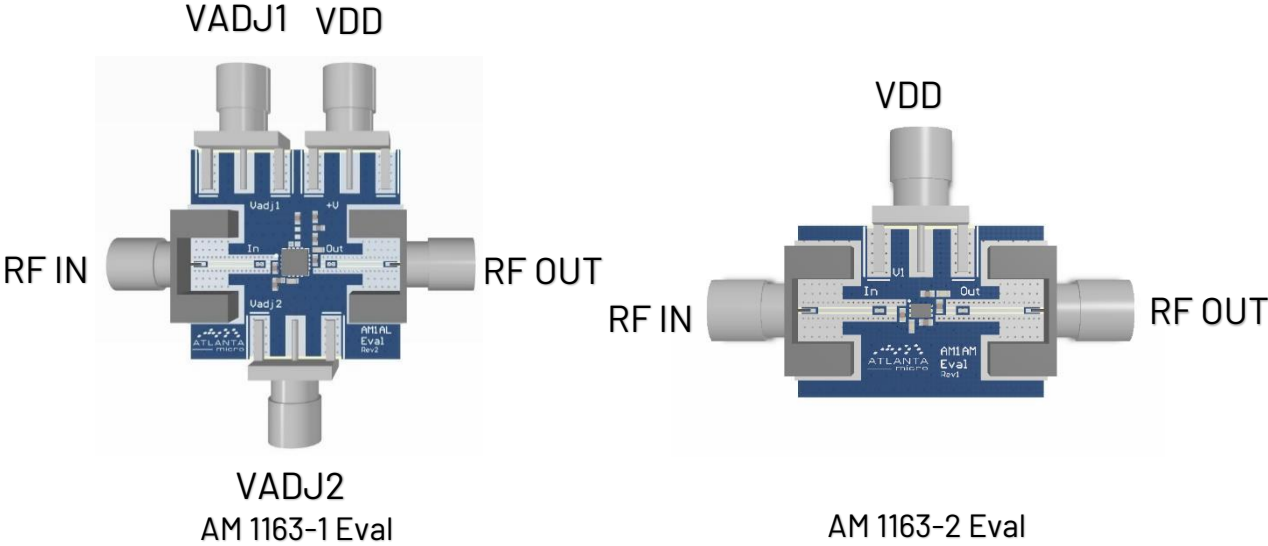

PART ORDERING DETAILS

Part Number	Description
AM1163-1	3mm 16 Lead QFN
AM1163-2	1.3mm x 2mm 6 Lead DFN
AM1163-1 Eval	AM1163-1 Evaluation Board
AM1163-2 Eval	AM1163-2 Evaluation Board
AM1163-M	AM1163-1 in 0.95" x 1.13" x 0.6" RF-Shielded Module with Integrated Bias Tee and Field Replaceable SMA Connectors

RELATED PARTS

Part Number	Description
AM1164	DC to 8 GHz Gain Block with External Bead
AM1063-1	DC to 10 GHz Gain Block
AM1063-2	DC to 10 GHz Miniature Gain Block
AM1064-1	DC to 8 GHz Gain Block
AM1064-2	DC to 8 GHz Miniature Gain Block
AM1016B	20 MHz to 6 GHz +3.3V Gain Block
AM1018C	20 MHz to 6 GHz +5.0V Gain Block
AM1025B	20 MHz to 3 GHz +8.0V Gain Block (High P1dB)
AM1031C	20 MHz to 8 GHz +3.3V Gain Block
AM1065	DC to 8 GHz Bypassable Gain Block

TECHNICAL DATA SHEET

AM1073	DC to 8 GHz	Bidirectional / Bypassable Gain Block
--------	-------------	---------------------------------------

## COMPONENT COMPLIANCE INFORMATION

**RoHS:** Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

**REACH:** Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

**Conflict Materials:** Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

**Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.**

**Corporate Headquarters**

50 Minuteman Road  
Andover, MA 01810 USA  
+1 978.967.1401 tel  
+1 866.627.6951 tel  
+1 978.256.3599 fax

**International Headquarters****Mercury International**

Avenue Eugène-Lance, 38  
PO Box 584  
CH-1212 Grand-Lancy 1  
Geneva, Switzerland  
+41 22 884 5100 tel

**Learn more**

**Visit:** [mrcy.com](https://mrcy.com)

For pricing details, contact: [MMICsales@mrcy.com](mailto:MMICsales@mrcy.com)

For technical details, contact: [MMICsupport@mrcy.com](mailto:MMICsupport@mrcy.com)



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

