


AM3033 – Tunable Filter

Digitally Tunable 100 to 225 GHz Highpass




AM3033 is a miniature digitally tunable highpass filter covering the 100 to 225 MHz frequency range. The filter provides 16 selectable highpass cutoff states with four digital control bits. The tunable highpass filter can be combined with one of Mercury's tunable lowpass filters to provide a flexible tunable bandpass filter solution. AM3033 is packaged in a 4mm QFN package and operates over the -40°C to +100°C temperature range.



FEATURES

- Discrete high pass cutoff steps
- 4-bit control, 3V or 5V logic
- No calibration required
- 5V DC supply
- 4mm QFN package
- -40°C to +100°C operation

FUNCTIONAL DIAGRAM

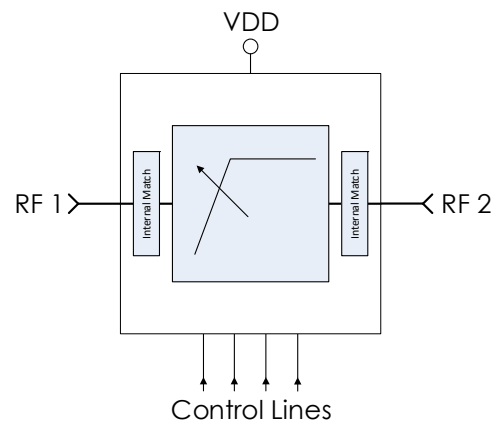

CHARACTERISTIC PERFORMANCE

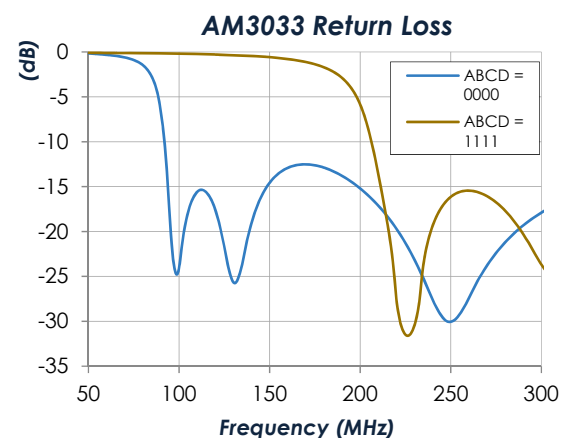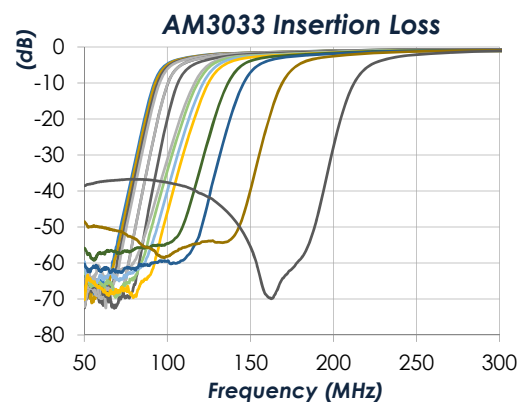

CONTENTS

FEATURES 1

FUNCTIONAL DIAGRAM 1

CHARACTERISTIC PERFORMANCE 1

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 6

TYPICAL APPLICATION..... 7

EVALUATION PC BOARD..... 9


RELATED PARTS..... 9

COMPONENT COMPLIANCE INFORMATION 10

REVISION HISTORY

Date	Revision	Notes
May 16, 2016	1	Initial Release
May 16, 2016	2	Updated NC pin recommendation
May 19, 2016	3	Updated recommended components
January 20, 2017	4	Updated business address
February 16, 2017	5	Added recommended footprint
June 7, 2021	6	Extended operating temperature to +100C, added group delay plots, moved package information to separate document, updated datasheet format
August 13, 2021	7	Updated Max Rated Power to +33dBm
June 20, 2024	8	Changed to Mercury branding. No content changes.

PIN LAYOUT AND DEFINITIONS

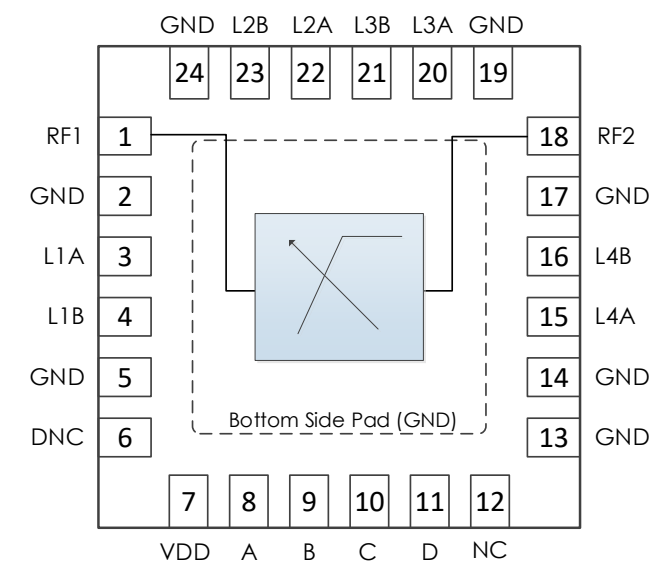

Pin	Name	Function
1	RF 1	RF Port 1 – 50 ohms, DC coupled. External AC coupling capacitor required.
2	GND	Ground – Common
3	L1A	External inductor L1 connection
4	L2A	External inductor L1 connection
5	GND	Ground – Common
6	DNC	Do Not Connect
7	VDD	+5.0V DC Power Input
8	A	Filter Control Bit A
9	B	Filter Control Bit B
10	C	Filter Control Bit C
11	D	Filter Control Bit D
12	NC	Not Connected. Pin may be grounded or left floating.
13 – 14	GND	Ground – Common
15	L4A	External inductor L4 connection
16	L4B	External inductor L4 connection
17	GND	Ground – Common
18	RF 2	RF Port 2 – 50 ohms, DC coupled. External AC coupling capacitor required.
19	GND	Ground – Common
20	L3A	External inductor L3 connection
21	L3B	External inductor L3 connection
22	L2A	External inductor L2 connection
23	L2B	External inductor L2 connection
24	GND	Ground – Common
Base Pad	GND	Ground – Common

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+6.0 V
RF Input Power		+33 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-55 C	+150 C

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage		+5.0 V	
Operating Case Temperature	-40 C		+100 C
Operating Junction Temperature	-40 C		+125 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
Storage Temperature Range	-50 C	+125 C
Moisture Sensitivity Level	MSL 1	



Mercury products are electrostatic sensitive.
Follow safe handling practices to avoid damage.

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Supply Voltage		+4.7 V	+5.0 V	+5.2 V
DC Supply Current	VDD = +5.0 V		1 mA	
Power Dissipated	VDD = +5.0 V		5 mW	
Logic Level Low		-0.1 V		+0.5 V
Logic Level High		+2.0 V		+5.0 V

State Table

D	C	B	A	Typical Cutoff Freq. (GHz)
L	L	L	L	97
L	L	L	H	98
L	L	H	L	99
L	L	H	H	101
L	H	L	L	104
L	H	L	H	106
L	H	H	L	109
L	H	H	H	113
H	L	L	L	123
H	L	L	H	125
H	L	H	L	128
H	L	H	H	131
H	H	L	L	143
H	H	L	H	152
H	H	H	L	176
H	H	H	H	219

RF Performance

(T = 25 °C unless otherwise specified)





Param	Testing Conditions	Min	Typical	Max
Cutoff Frequency Range		100 MHz		225 MHz
Insertion Loss	f = 225 MHz, ABCD = 1111		4.4 dB	
	f = 500 MHz, ABCD = 1111		1.3 dB	
	f = 2.0 GHz, ABCD = 1111		2.0 dB	
Return Loss	f = 225 MHz, ABCD = 1111		32 dB	
	f = 500 MHz, ABCD = 1111		7.9 dB	
	f = 2.0 GHz, ABCD = 1111		5.3 dB	
Input IP3	ABCD = 1111		+40 dBm	

Timing Characteristic

	Minimum	Typical	Maximum
Switching Speed			1 μs


TYPICAL PERFORMANCE

(T = 25 °C unless otherwise specified. Only some states shown for simplicity. Refer to s-parameters available for download on the Mercury website for more information.)

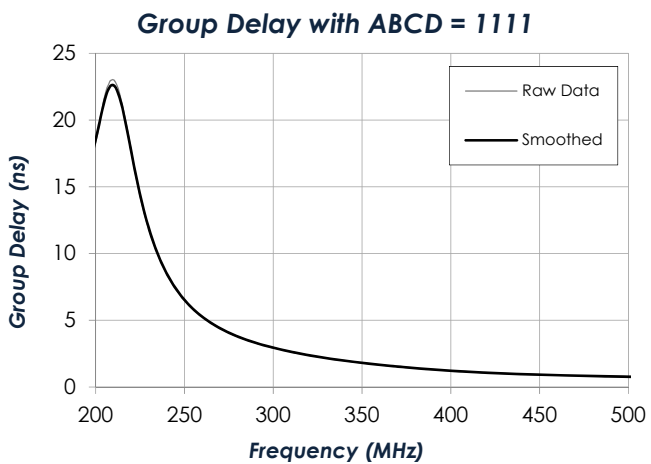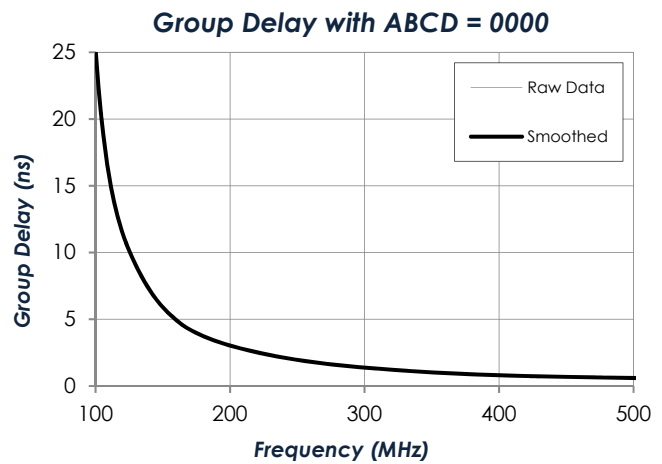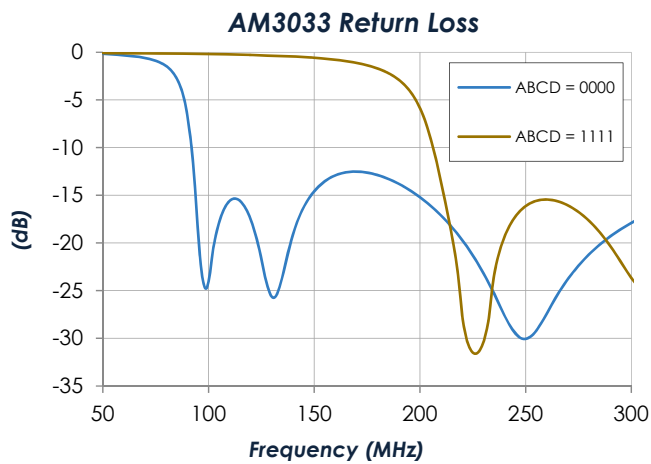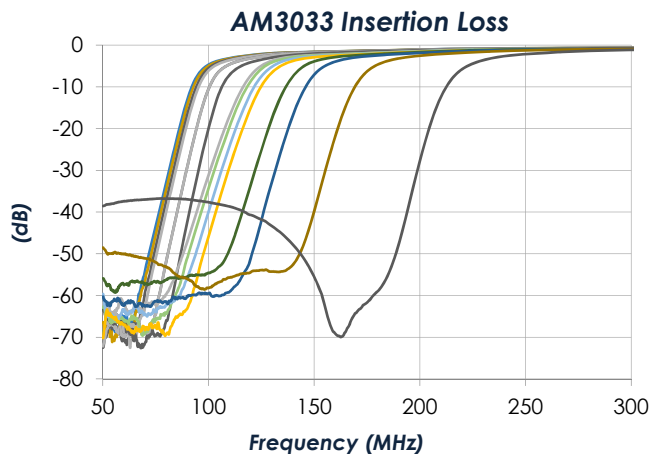

TYPICAL APPLICATION

Multiple Passives

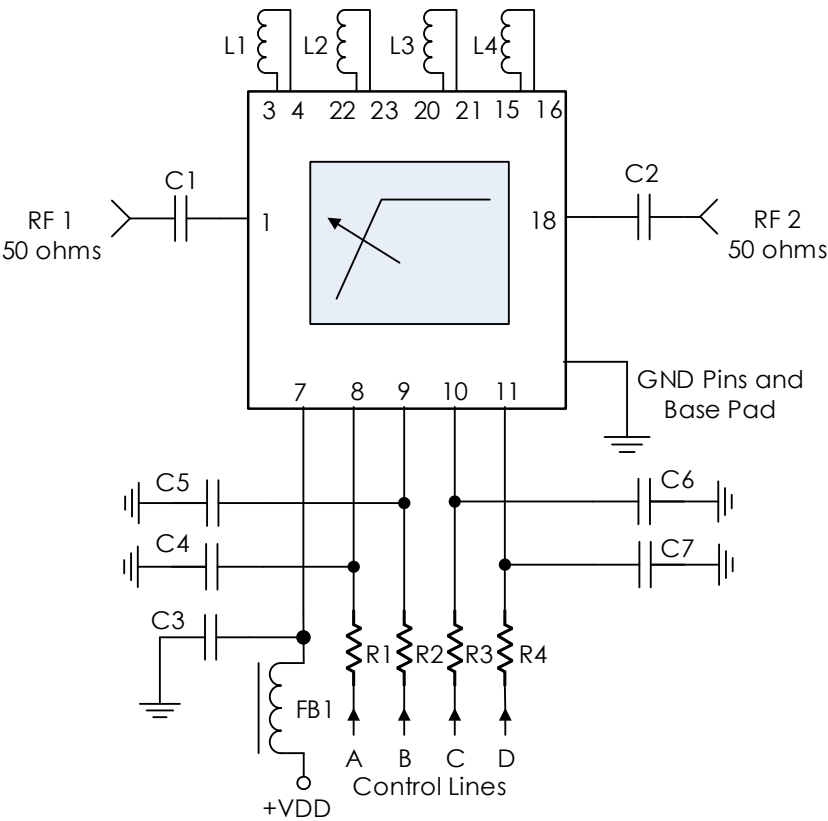


Recommended Component List (or Equivalent)

Part	Value	Part Number	Manufacturer
C1, C2	0.1 uF	0402BB104KW160	Passives Plus
FB1	-	MMZ1005A222E	TDK
R1, R2,R3,R4	100 Ohms	CRCW0402100RJN	Vishay
C3, C4,C5,C6,C7	0.1 uF	C1005X7R1H104K050BB	TDK
L1, L4	68 nH	0402HP-68NXGLW	Coilcraft
L2, L3	56 nH	0402HP-56NXGLW	Coilcraft

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. RC filtering on the control lines is recommended to prevent digital noise from coupling to the RF path.
 - a. Select control line RC filter values based on desired logic source decoupling and switching speed.

Smallest Footprint

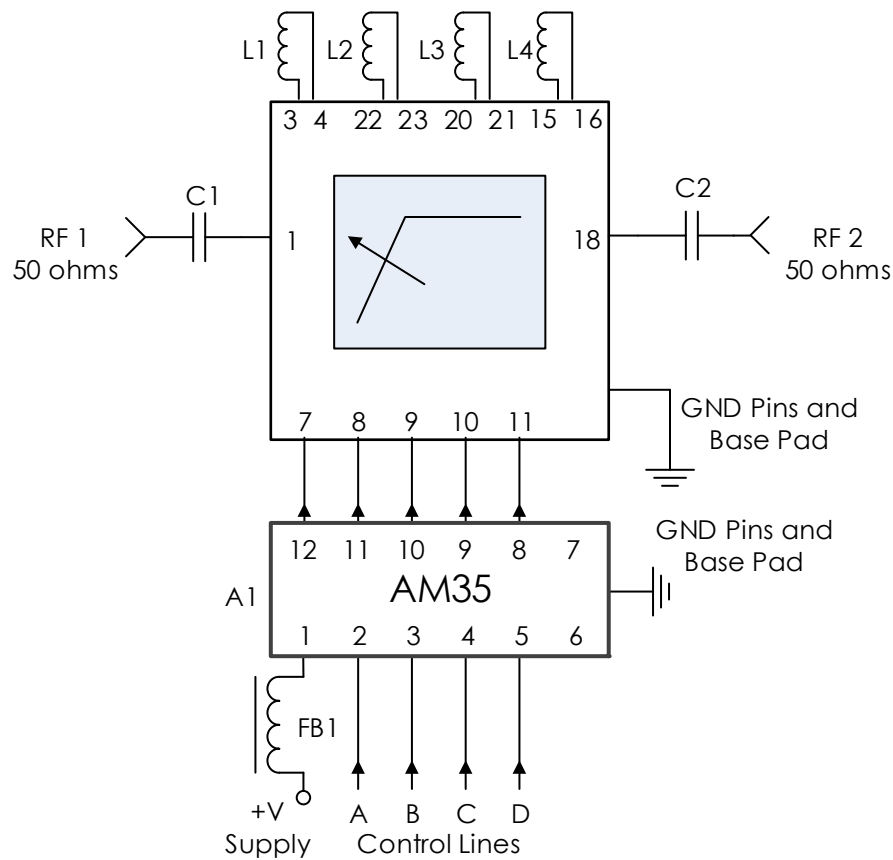


Recommended Component List (or Equivalent)

Part	Value	Part Number	Manufacturer
A1	-	AM35	Mercury
C1, C2	0.1 uF	0402BB104KW160	Passives Plus
FB1	-	MMZ1005A222E	TDK
L1, L4	68 nH	0402HP-68NXGLW	Coilcraft
L2, L3	56 nH	0402HP-56NXGLW	Coilcraft

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. AM35 provides power and control line filtering with high frequency isolation to 50+ GHz.
 - a. AM35 is a 1.5mm x 3mm (0.5mm pitch) EMI filter bank providing a small total footprint for applications with tight space requirements.
 - b. Ferrite bead in series with power line provides better low frequency isolation.
 - c. See AM35 datasheet for performance details.

EVALUATION PC BOARD

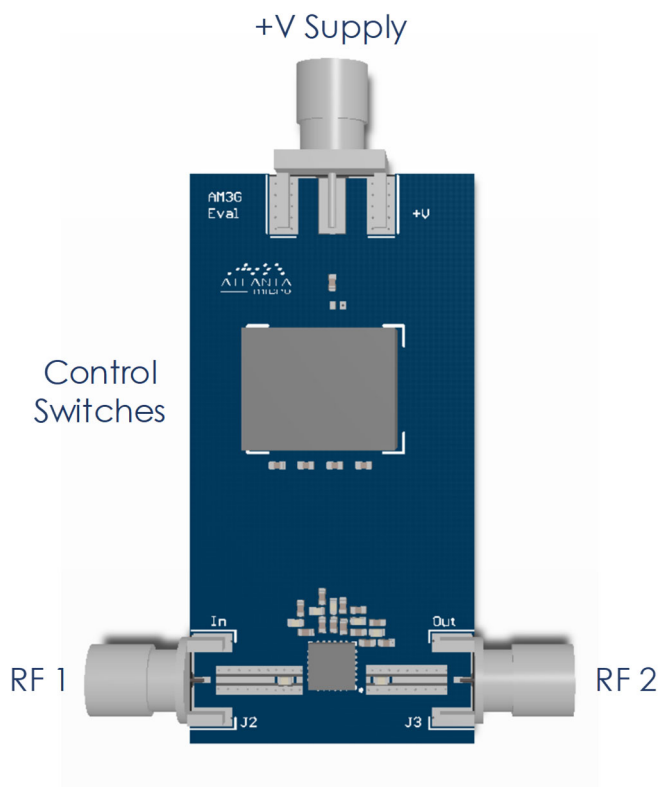

RELATED PARTS

Part Number		Description
AM35	100 MHz to 40 GHz	Stopband, EMI filter bank
AM3150	30 MHz to 550 MHz	Digitally Tunable Lowpass
AM3034	150 MHz to 450 MHz	Digitally Tunable Lowpass
AM3035	500 MHz to 1200 MHz	Digitally Tunable Lowpass
AM3029	1.5 GHz to 3 GHz	Digitally Tunable Lowpass
AM3107	6 GHz to 12 GHz	Digitally Tunable Lowpass
AM3151	20 MHz to 320 MHz	Digitally Tunable Highpass
AM3036	330 MHz to 700 MHz	Digitally Tunable Highpass
AM3031	1.0 GHz to 1.8 GHz	Digitally Tunable Highpass
AM3032	2.5 GHz to 4.5 GHz	Digitally Tunable Highpass
AM3041	6 GHz to 10 GHz	Digitally Tunable Highpass

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

