

AM1065-2 – Amplifier


DC to 8 GHz Bypassable

The **AM1065-2** is a high dynamic range bypassable DC-coupled amplifier covering up to 8 GHz. The device exhibits low bypass insertion loss, and a flat gain profile useful in many broadband applications. Packaged in a 3mm QFN with internal 50 Ω matching and requiring a single positive control voltage, the AM1065-2 represents a dramatic size reduction over a discrete implementation of a bypassable amplifier.

FEATURES


- 20 dB Gain
- 2.0 dB Bypass Insertion Loss
- 2.0 dB Noise Figure
- +31 dBm OIP3
- +18 dBm P1dB
- +20 dBm PSat
- +5.0V, 72/1 mA (Gain/Bypass)
- +3.0V to +5.0V Supply Range
- +3.3V or +5V Logic Compatible
- 3mm QFN Package

FUNCTIONAL DIAGRAM

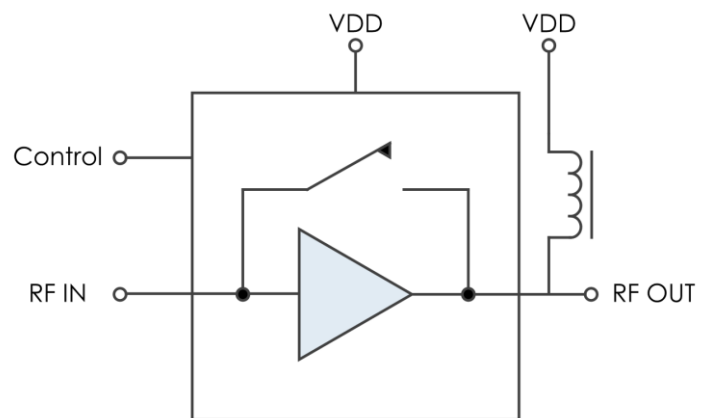


CHARACTERISTIC PERFORMANCE

Gain and Return Loss at +25C

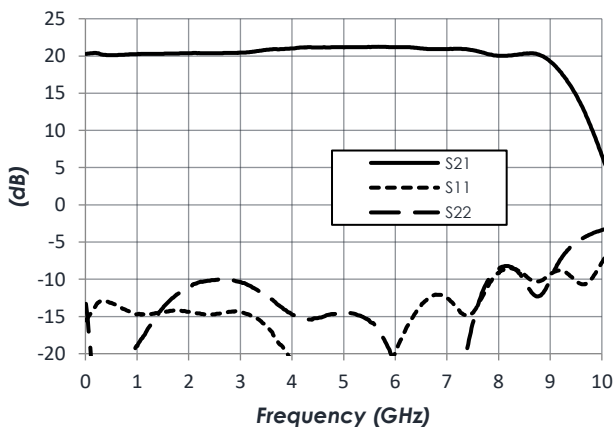

Noise Figure at +25C

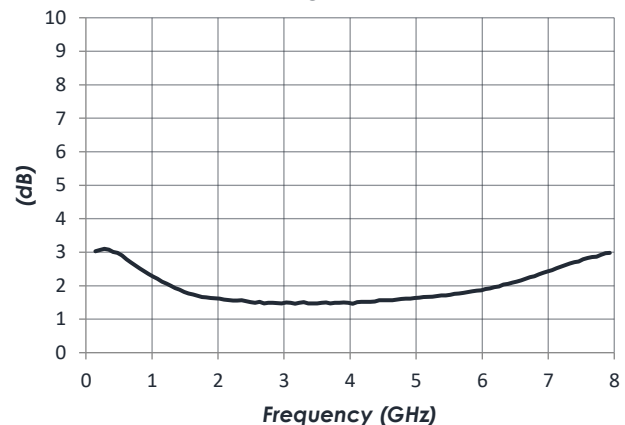

CONTENTS

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 7

TYPICAL APPLICATION.....10

EVALUATION PC BOARD.....11

RELATED PARTS11


PARTS ORDERING DETAILS.....11

COMPONENT COMPLIANCE INFORMATION12

REVISION HISTORY

Date	Revision	Notes
June 15, 2021	0	Preliminary Release
June 28, 2021	1	Initial Release
November 7, 2024	2	Changed to Mercury branding. No content changes.

PIN LAYOUT AND DEFINITIONS

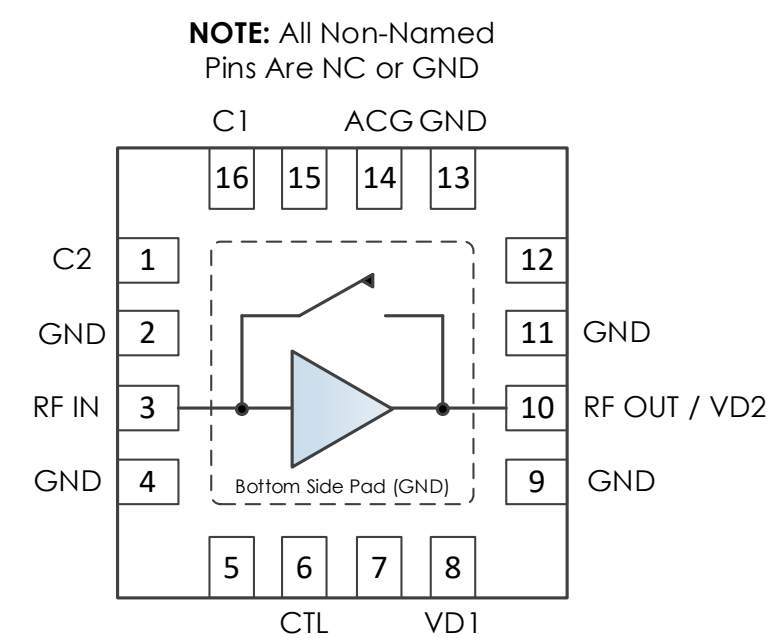

Pin	Name	Function
1	C2	External Capacitor Connection 2
2	GND	Ground – Common
3	RF IN	RF Input – 50 ohms – DC Coupled, External DC Block Required
4	GND	Ground – Common
5	NC	Not Connected *
6	CTL	Bypass/Amplifier Mode Control
7	NC	Not Connected *
8	VD1	DC Power Input
9	GND	Ground – Common
10	RF OUT/VD2	RF Output and DC Power Input – 50 Ohms – DC Coupled, External DC Block Required.
11	GND	Ground – Common
12	NC	Not Connected *
13	GND	Ground – Common
14	ACG	AC Ground
15	NC	Not Connected *
16	C1	External Capacitor Connection 1
Bottom Pad	GND	Ground – Common

* NC pins may be grounded or left open.

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	0.0 V	+6.0 V
RF Input Power		+25 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-50C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Devices subjected to conditions outside of what is recommended for extended periods may affect device reliability.

Handling Information

	Minimum	Maximum
Storage Temperature Range (Recommended)	-50 C	+125 C
Moisture Sensitivity Level	MSL 3	



Mercury products are electrostatic sensitive.
Follow safe handling practices to avoid damage.

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+3.0 V	+4.7 V	+5.2 V
Operating Case Temperature	-40 C		+85 C
Operating Junction Temperature	-40 C		+125 C

Thermal Information

Thermal Resistance (°C / W)	
Junction to Case Thermal Resistance (θ_{JC})	63.0

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max.
DC Supply Voltage		+3.0 V	+4.7 V	+5.2 V
DC Supply Current	VDD = +5.0 V, Amp On	64 mA	72 mA	80 mA
	VDD = +3.3 V, Amp On	28 mA	32 mA	36 mA
	VDD = +5.0 V, Amp Byp.		1 mA	
	VDD = +3.3 V, Amp Byp.		< 1mA	
Power Dissipated	VDD = +5.0 V, Amp On	0.32 W	0.36 W	0.40 W
	VDD = +3.3 V, Amp On	0.09 W	0.11 W	0.12 W
Logic Level Low		-0.1 V		+0.4 V
Logic Level High		+2.2 V		+5.0 V
Control Current	CTL = +3.3V		115 μ A	
	CTL = +5.0V		200 μ A	

RF Performance

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max.
Frequency Range		DC		8 GHz
Gain	VDD = +5.0 V		20 dB	
	VDD = +3.3 V		20 dB	
Return Loss	VDD = +5.0 V		13 dB	
Bypass Insertion Loss	VDD = +5.0 V		2 dB	
Output IP3	VDD = +5.0 V		+31 dBm	
Output P1dB	VDD = +5.0 V		+18 dBm	
Noise Figure	VDD = +5.0 V		2.0 dB	

State Table


CTL	Amplifier
High	Enabled
Low	Bypassed

Timing Characteristics


(T = 25 °C, VDD = +3.3V, CTL = 0.0V / +3.3V)

Switching Time	Minimum	Typical ²	Maximum
Amp On → Amp Bypass)	125 ns	175 ns	300 ns
Amp Bypass → Amp On)	700 ns	3.8 μs	7.0 μs


Bypass to Amp On vs Cap Values

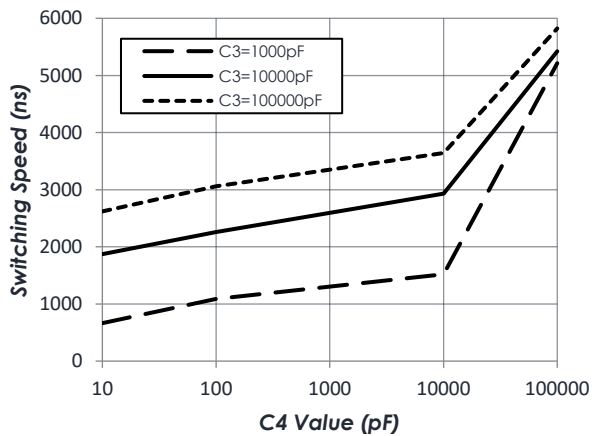

Amp to Bypass vs Cap Values

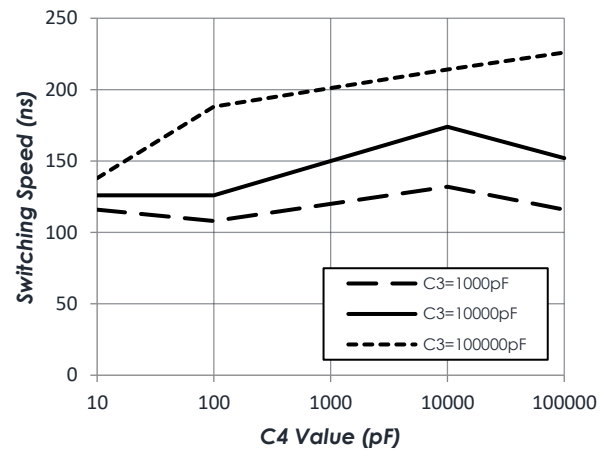

Gain vs C4 Value





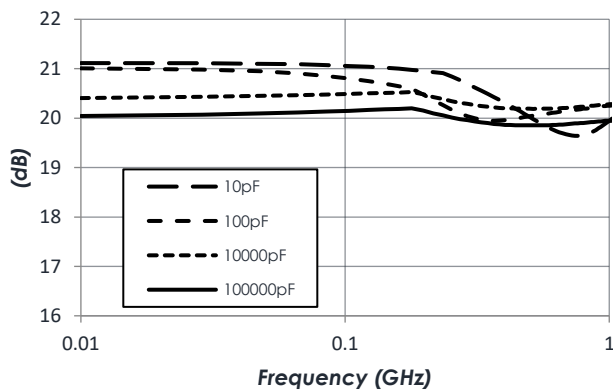


Notes:

1. Switching speeds measured as 50% trigger to 10%/90% RF respectively.
2. Typical measurements reflect switching speeds of amp as configured in Typical Application section.
3. To change times, alter value of C3 and C4 (see Typical Application section).





TYPICAL PERFORMANCE

(Amplifier Enabled, VDD = +5.0 V, ID = 72mA)

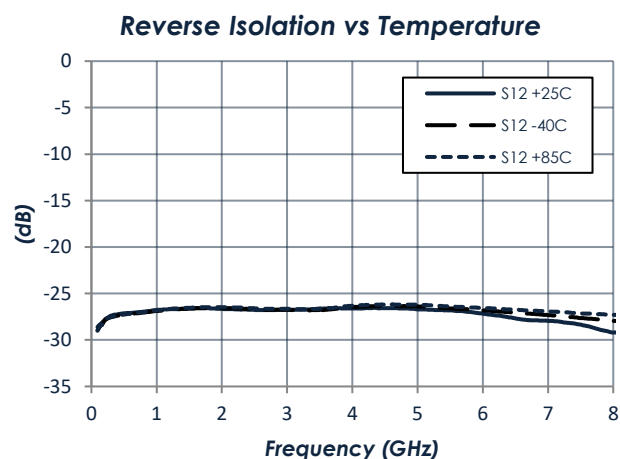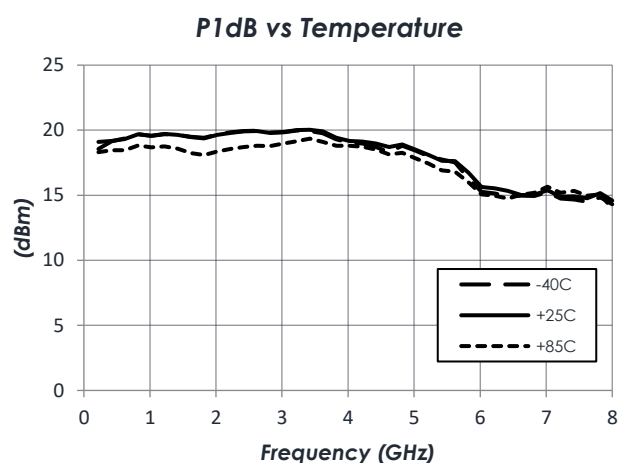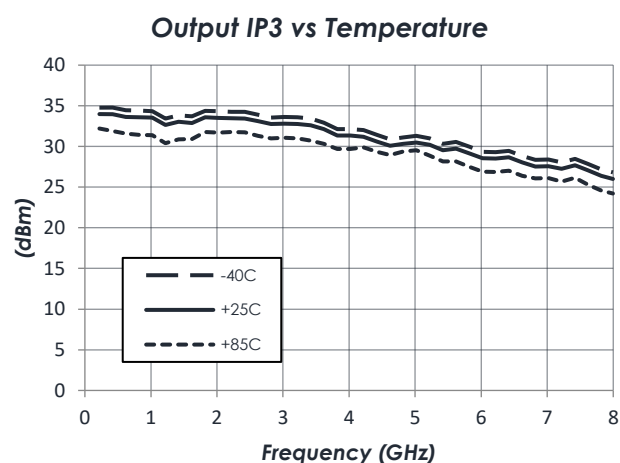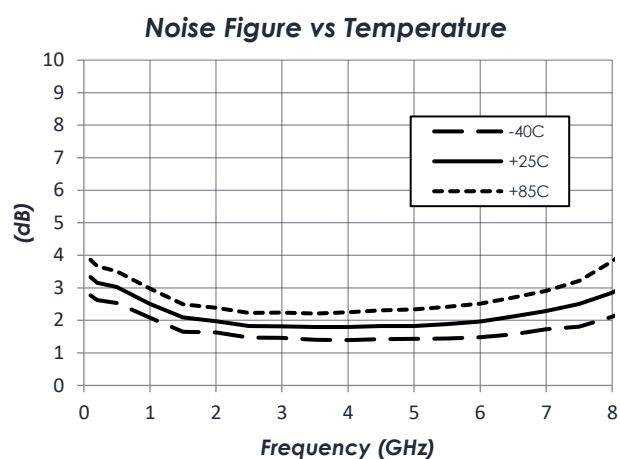
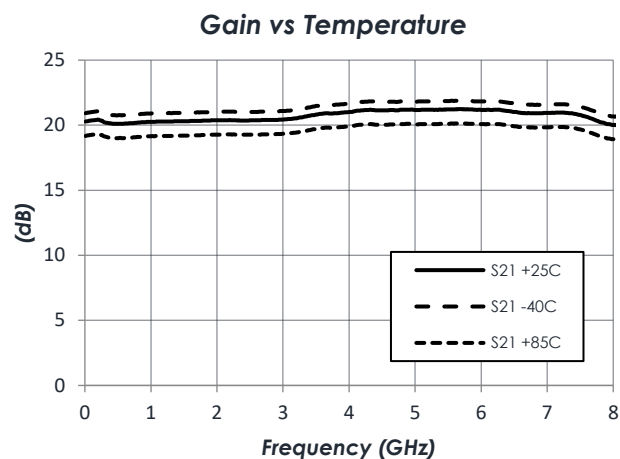


TYPICAL PERFORMANCE (continued)

(Amplifier Enabled, VDD = +5.0 V, ID = 72mA)

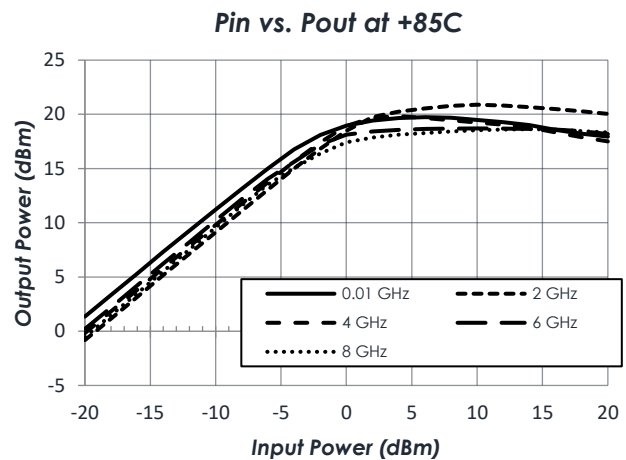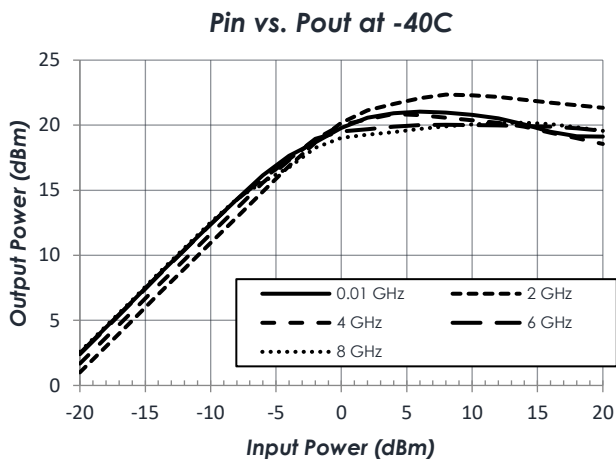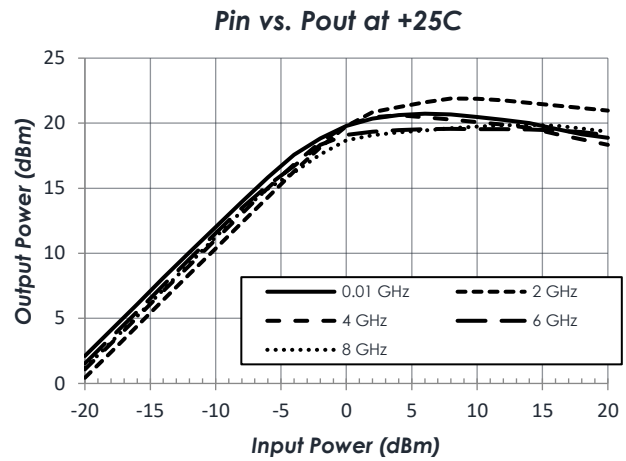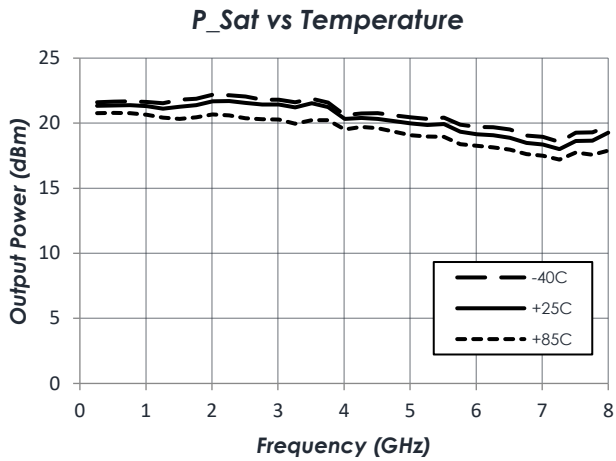


(Amplifier Bypass, VDD = +5.0 V, ID = 1mA)

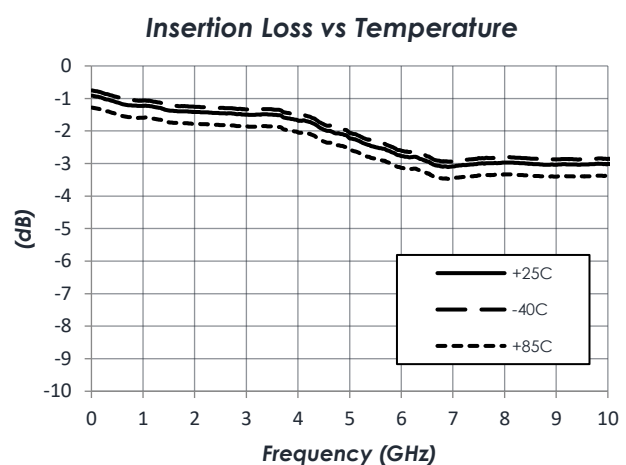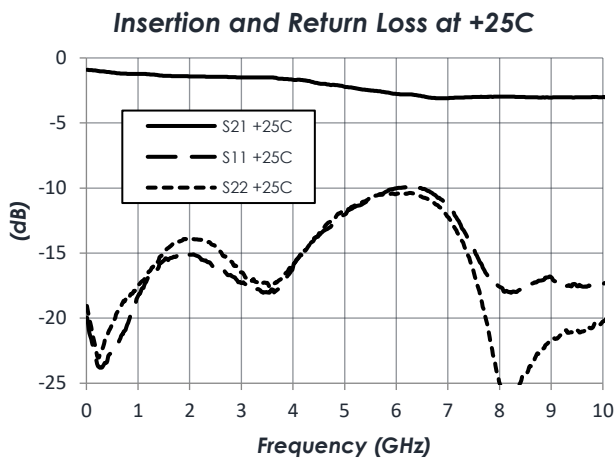


TYPICAL PERFORMANCE (CONTINUED)

(T = 25 °C, Amplifier Enabled unless otherwise specified)


Gain vs VDD

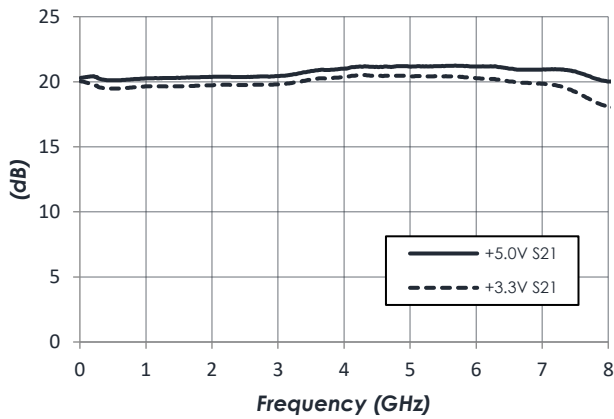


Noise Figure vs VDD

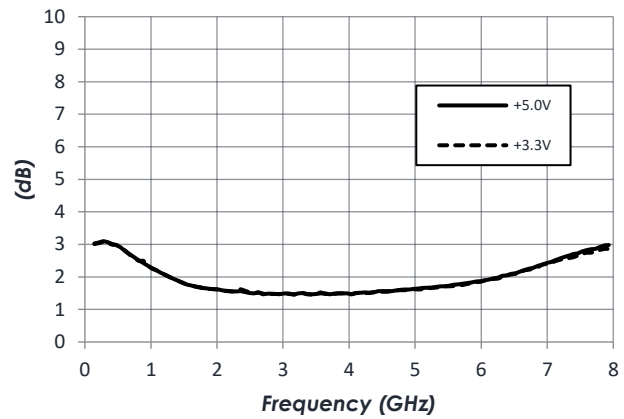


Output IP3 vs VDD

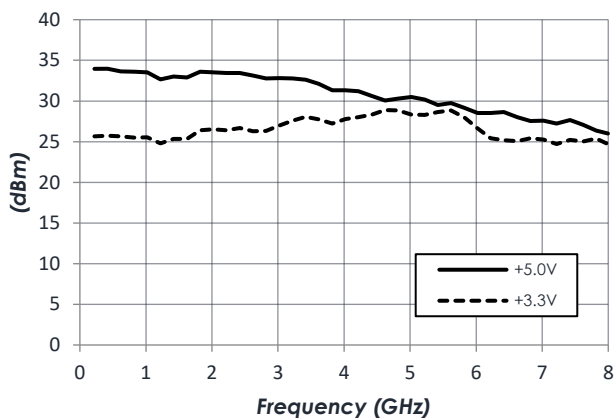


P1dB vs VDD

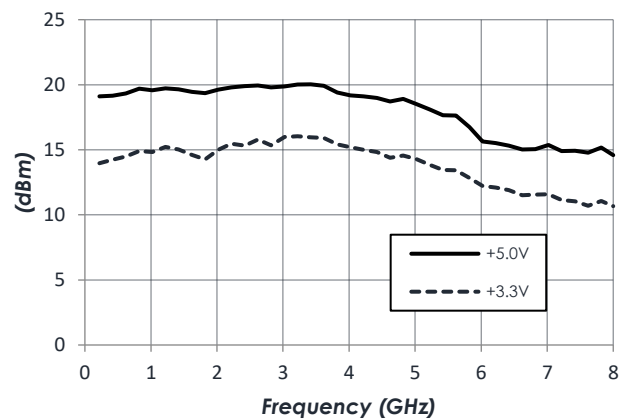


Output IP2 vs VDD

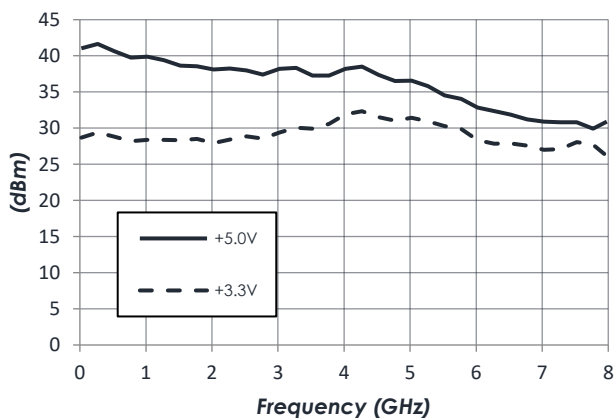

ID vs. VD2

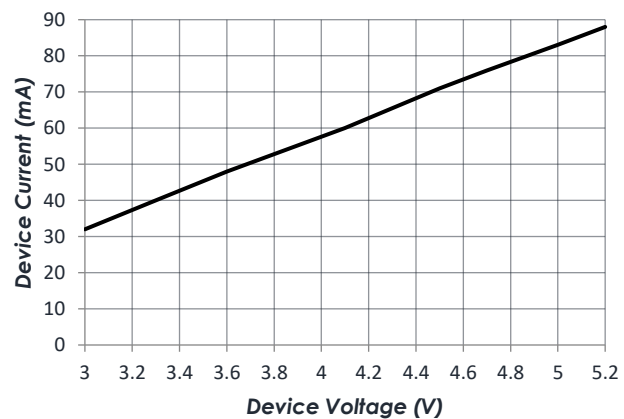

TYPICAL APPLICATION

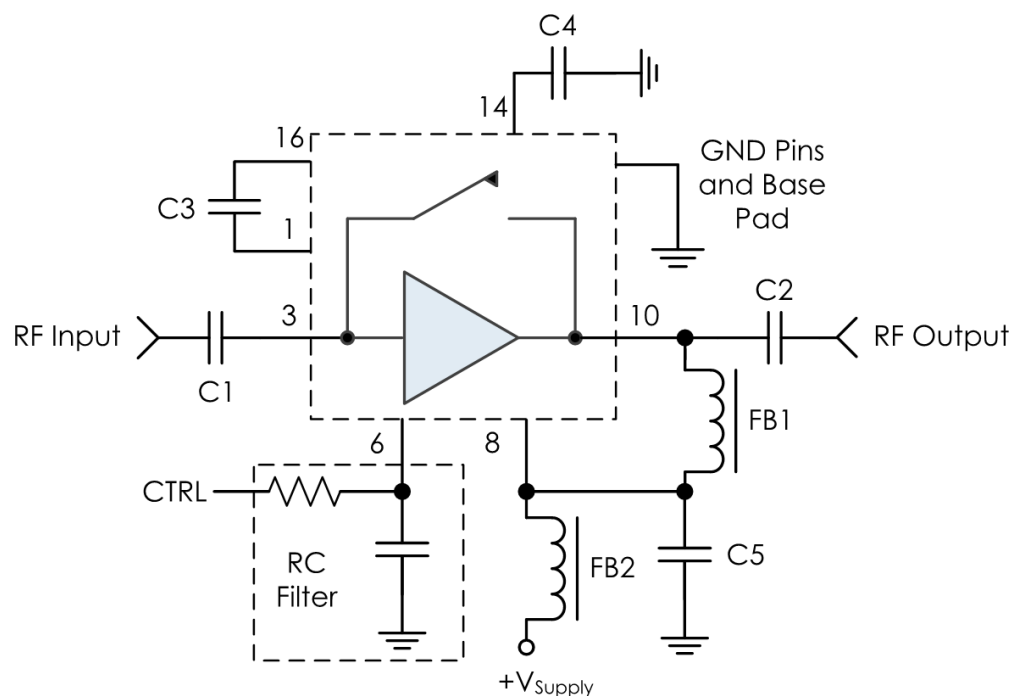


RECOMMENDED COMPONENT LIST (OR EQUIVALENT)

Part	Value	Part Number	Manufacturer
C1, C2, C3	0.1 μ F	0201BB104KW250	Passives Plus
C4	10,000 pF	GRM033R61E103KA12D	Murata
C5	0.1 μ F	GCM155R71H104KE02J	Murata
FB1, FB2	-	MMZ1005A222E	TDK

Notes:

1. DC blocking capacitors C1 – C3 should be high performance, low-loss, broadband capacitors for optimum performance.
2. Select control line RC filter values based on desired logic source decoupling and switching speed.
3. C3 and C4 should be placed as close to the AM1065 as possible to minimize PCB trace lengths. A 0201 package size is recommended to minimize stray PCB pad capacitance to ground.

EVALUATION PC BOARD

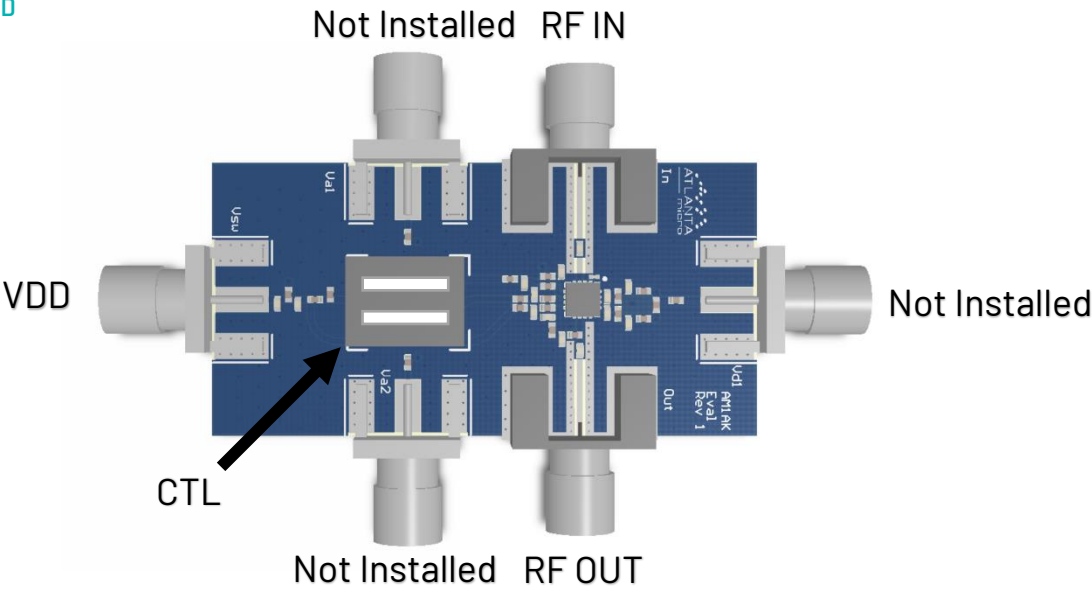

RELATED PARTS

Part Number		Description
AM1065	DC to 8 GHz	Bypassable Gain Block
AM1081	DC to 8 GHz	Bypassable Gain Block (Higher IP3)
AM1081-2	DC to 8 GHz	Miniature Bypassable Gain Block
AM1063-1	DC to 10 GHz	Gain Block
AM1063-2	DC to 10 GHz	Miniature Gain Block
AM1064-1	DC to 8 GHz	Gain Block
AM1064-2	DC to 8 GHz	Miniature Gain Block
AM1067	5 GHz to 20 GHz	Bypassable Gain Block
AM1073	DC to 8 GHz	Bidirectional / Bypassable Gain Block
AM1075	5 GHz to 26.5 GHz	Bypassable Gain Block

PARTS ORDERING DETAILS

Description	Part Number
4mm 24 Lead QFN	AM1065
3mm 16 Lead QFN	AM1065-2
AM1065 Evaluation Board	AM1065 Eval
AM1065-2 Evaluation Board	AM1065-2 Eval
AM1065 in 0.95" x 1.13" x 0.6" RF-Shielded Module with Integrated Bias Tee and Field Replaceable SMA Connectors	AM1065-M

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

