


AM3090 – Digitally Tunable Filter

100 to 225 MHz Highpass; 150 to 450 MHz Lowpass




AM3090 is a miniature digitally tunable filter providing selectable highpass filtering over the 100 to 225 MHz and independently selectable lowpass filtering over the 150 to 450 MHz frequency range. The filter also provides a bypass mode where only the lowpass filter is active. With independent 4-bit digital control for each of the filters many center frequency/bandwidth configurations can easily be achieved. AM3090 has a compact 4mm x 8mm QFN footprint.

FEATURES


- Independent LP and HP control
- + Coupled Lowpass Mode
- +3.3V to +5.0V Supply
- 4-bit Control, +3V to +5V Logic
- 3.0 dB Insertion Loss
- Integrated Control Line Filtering
- 4mm x 8mm QFN Package
- -40°C to +85°C Operation
- No Calibration Required

FUNCTIONAL DIAGRAM

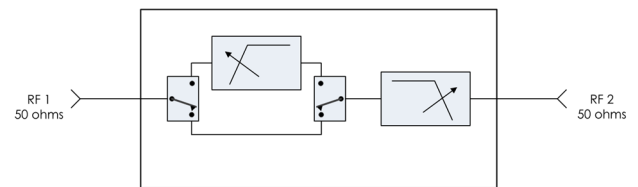


CHARACTERISTIC PERFORMANCE

Adjustable Center Frequency

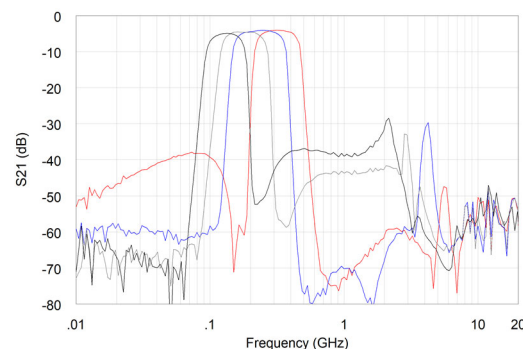

DC-Coupled Low Pass Mode

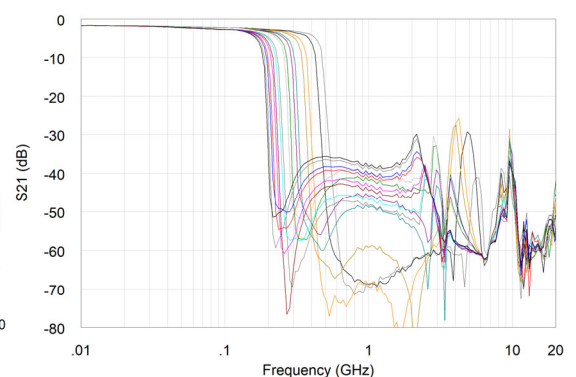

CONTENTS

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 6

TYPICAL APPLICATION..... 8

RECOMMENDED COMPONENT LIST (OR EQUIVALENT) 8

PACKAGE DETAILS..... 9

EVALUATION PC BOARD.....10


RELATED PARTS.....10

COMPONENT COMPLIANCE INFORMATION..... 11

REVISION HISTORY

Date	Revision	Notes
February 12, 2019	7	Updated to new datasheet format. Fixed pinout.
September 26, 2019	8	Corrected inductor part numbers in typical application circuit table.
October 17, 2023	9	MSL Corrected to MSL 3.
June 19, 2024	10	Changed to Mercury branding. No content changes.

PIN LAYOUT AND DEFINITIONS

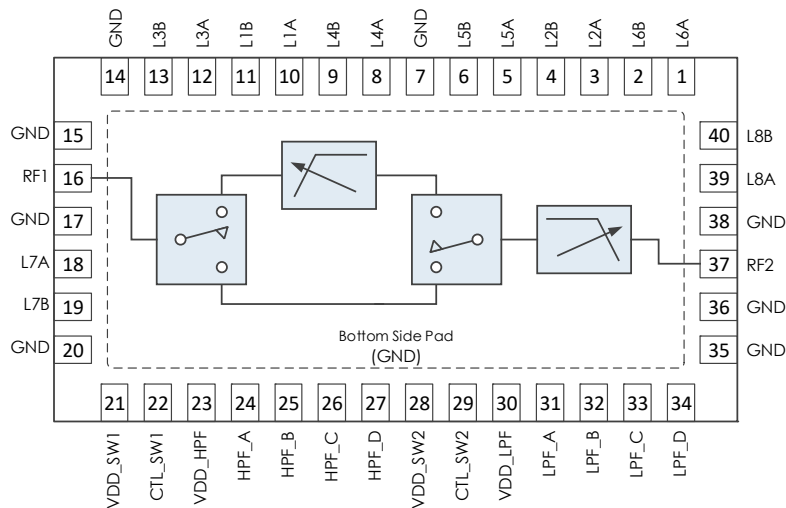

Pin	Name	Function
1	L6A	External Inductor L6 Connection
2	L6B	External Inductor L6 Connection
3	L2A	External Inductor L2 Connection
4	L2B	External Inductor L2 Connection
5	L5A	External Inductor L5 Connection
6	L5B	External Inductor L5 Connection
7	GND	Ground – Common
8	L4A	External Inductor L4 Connection
9	L4B	External Inductor L4 Connection
10	L1A	External Inductor L1 Connection
11	L1B	External Inductor L1 Connection
12	L3A	External Inductor L3 Connection
13	L3B	External Inductor L3 Connection
14, 15	GND	Ground – Common
16	RF1	RF Port 1 – 50 Ohms – DC Coupled. External DC blocking capacitor required
17	GND	Ground – Common
18	L7A	External Inductor L7 Connection

Pin	Name	Function
19	L7B	External Inductor L7 Connection
20	GND	Ground – Common
21	VDD_SW1	DC Power Input
22	CTL_SW1	Control Line for Switch 1
23	VDD_HP	DC Power Input
24	HPF_A	Highpass Filter Control Bit A
25	HPF_B	Highpass Filter Control Bit B
26	HPF_C	Highpass Filter Control Bit C
27	HPF_D	Highpass Filter Control Bit D
28	VDD_SW2	DC Power Input
29	CTL_SW2	Control Line for Switch 2
30	VDD_LP	DC Power Input
31	LPF_A	Lowpass Filter Control Bit A
32	LPF_B	Lowpass Filter Control Bit B
33	LPF_C	Lowpass Filter Control Bit C
34	LPF_D	Lowpass Filter Control Bit D
35, 36	GND	Ground – Common
37	RF2	RF Port 2 – 50 Ohms – DC Coupled. External DC blocking capacitor required.
38	GND	Ground – Common
39	L8A	External Inductor L8 Connection
40	L8B	External Inductor L8 Connection
Bottom Pad	GND	Ground – Common

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+6.0 V
RF Input Power		+27 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-50 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
Storage Temperature Range (Recommended)	-50 C	+125 C
Moisture Sensitivity Level	MSL 3	



Mercury products are electrostatic sensitive.
Follow safe handling practices to avoid damage.

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+3.0 V	+5.0 V	+5.2 V
Operating Case Temperature	-40 C		+85 C
Operating Junction Temperature	-40 C		+125 C

Timing Characteristics

Switching Time	Minimum	Typical	Maximum
Switching Speed		1 μ s	

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Supply Voltage		+3.0 V	+5.0 V	+5.2 V
DC Supply Current	VDD = +5.0 V		3 mA	
Power Dissipated	VDD = +5.0 V		15 mW	
Logic Level Low		-0.1 V		+0.5 V
Logic Level High		+2.0 V		+5.0 V

RF Performance

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
HPF Frequency Range		100 MHz		225 MHz
LPF Frequency Range		150 MHz		450 MHz
Insertion Loss			3 dB	
Input IP3	f = 350 MHz		+40 dBm	

State Tables

SW1	SW2	State
Low	High	HPF Bypassed
High	Low	HPF Active


State Tables (Continued)

High Pass Control Lines				Typical Cutoff Freq. (MHz)
HPF_D	HPF_C	HPF_B	HPF_A	
L	L	L	L	102
L	L	L	H	103
L	L	H	L	105
L	L	H	H	106
L	H	L	L	110
L	H	L	H	112
L	H	H	L	116
L	H	H	H	120
H	L	L	L	127
H	L	L	H	130
H	L	H	L	134
H	L	H	H	138
H	H	L	L	148
H	H	L	H	159
H	H	H	L	183
H	H	H	H	228


Low Pass Control Lines				Typical Cutoff Freq. (MHz)
LPF_D	LPF_C	LPF_B	LPF_A	
L	L	L	L	153
L	L	L	H	156
L	L	H	L	162
L	L	H	H	165
L	H	L	L	172
L	H	L	H	177
L	H	H	L	185
L	H	H	H	190
H	L	L	L	215
H	L	L	H	226
H	L	H	L	246
H	L	H	H	264
H	H	L	L	309
H	H	L	H	333
H	H	H	L	385
H	H	H	H	450

TYPICAL PERFORMANCE

Adjustable Center Frequency

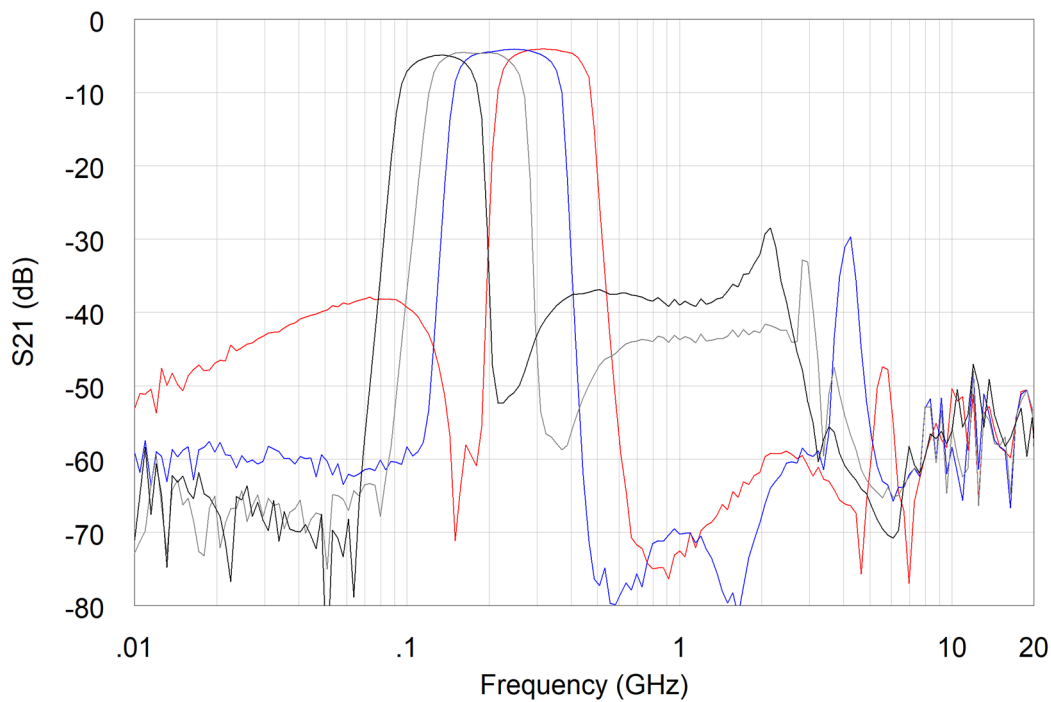


Adjustable Bandwidth – Tuning Highpass

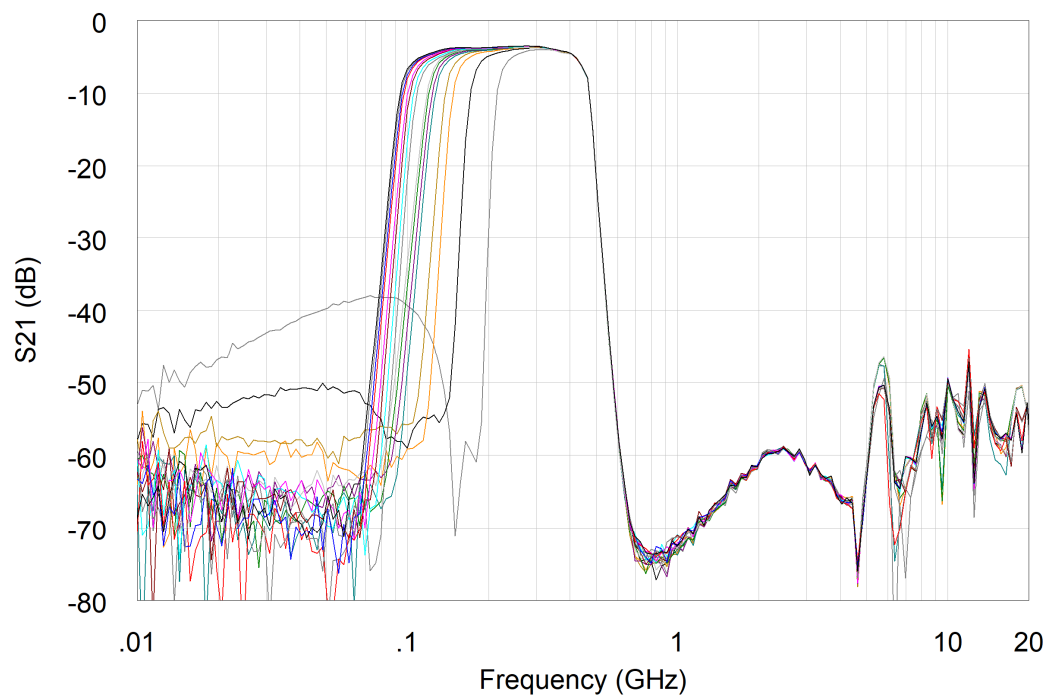


TYPICAL PERFORMANCE (CONTINUED)


Adjustable Bandwidth – Tuning Lowpass

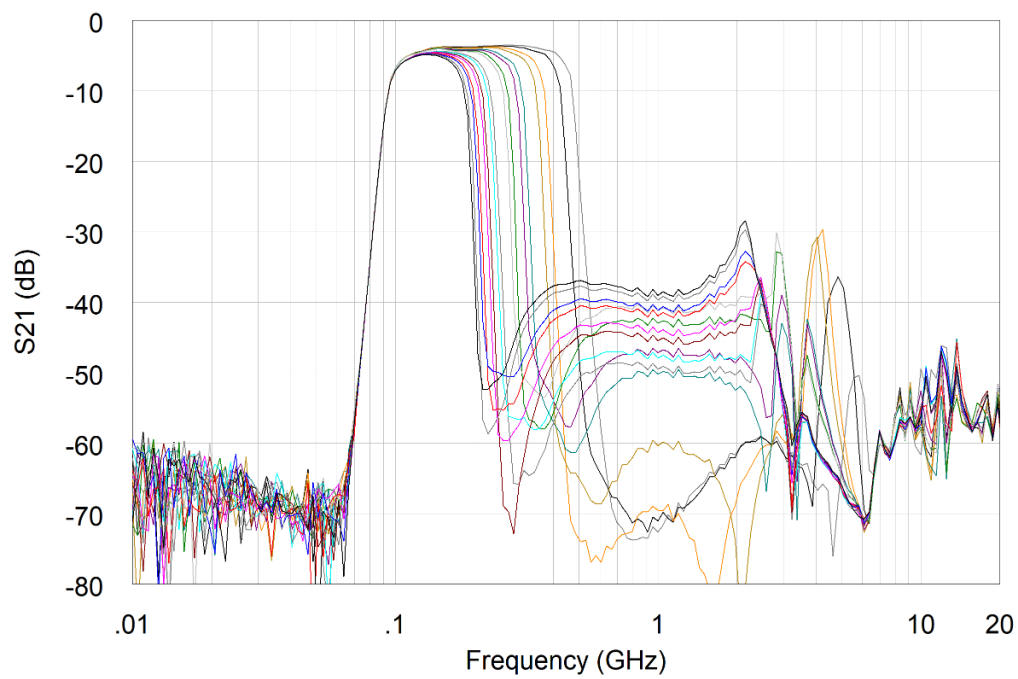

DC-Coupled Low Pass Model

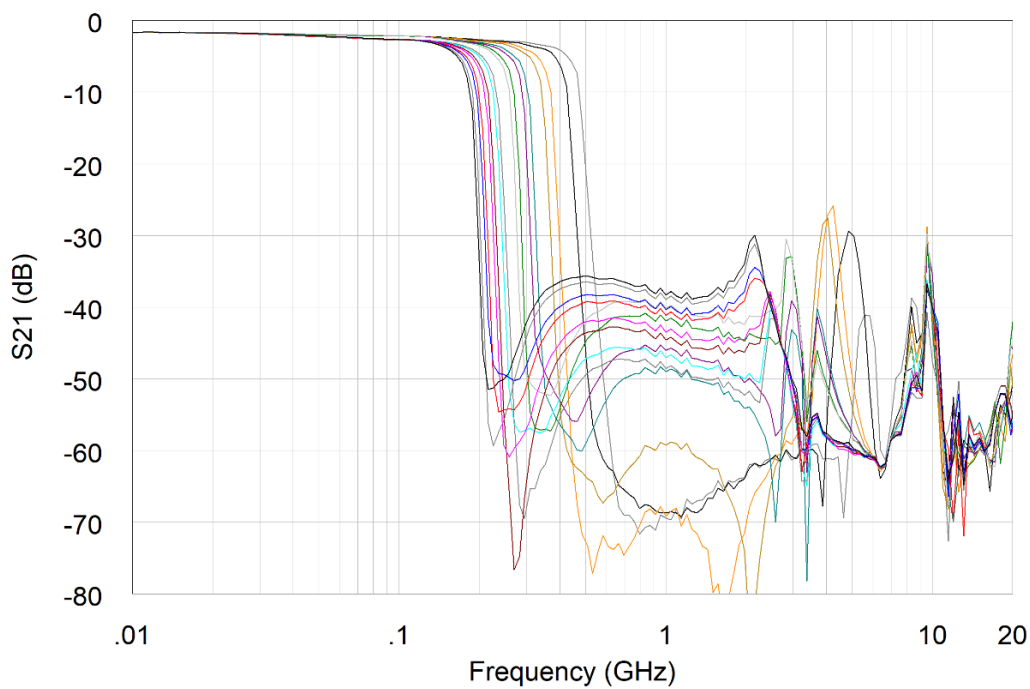

TYPICAL APPLICATION

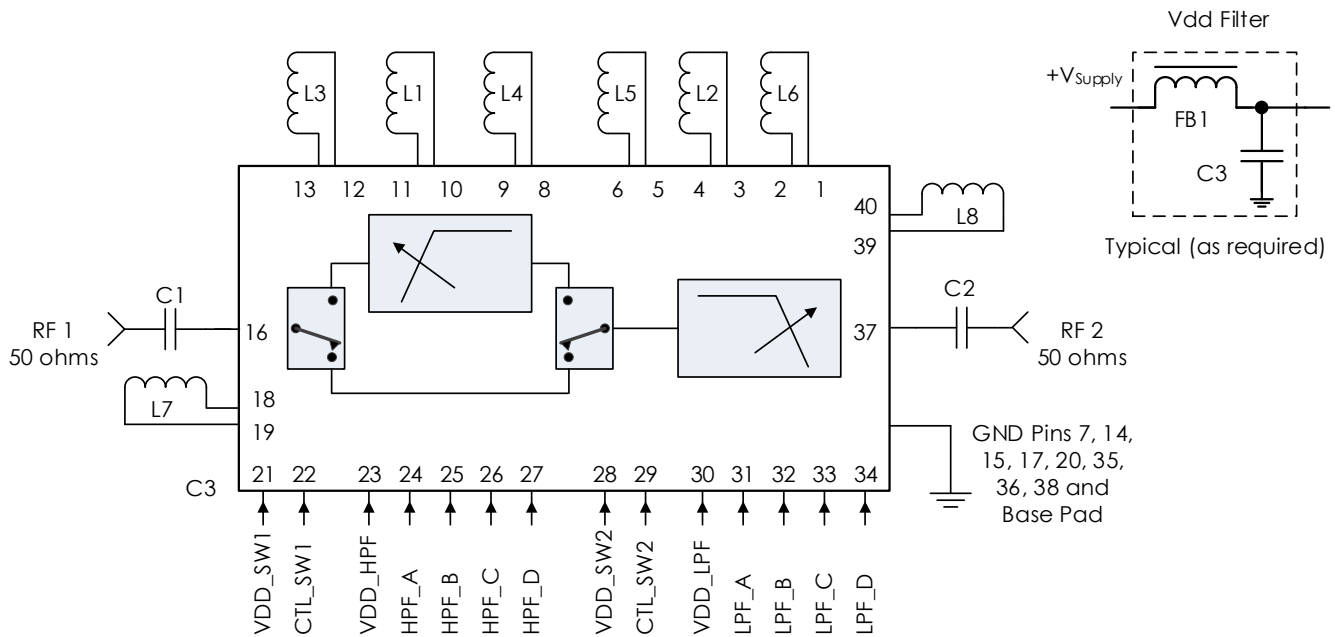

RECOMMENDED COMPONENT LIST (OR EQUIVALENT)


Part	Value	Part Number	Manufacturer
C1, C2	0.1 μ F	0402BB104KW160	Passives Plus
C3	0.1 μ F	C1005X7R1H104K050BB	TDK
FB1	-	MMZ1005A222E	TDK
L4, L7	68 nH	0402HP-68NXGLW	Coilcraft
L1, L3	56 nH	0402HP-56NXGLW	Coilcraft
L2, L6	27 nH	0402HP-27NXGLW	Coilcraft
L5, L8	24 nH	0402HP-24NXGLW	Coilcraft

Notes:


1. DC blocking capacitors should be low-loss, broadband capacitors for optimum performance
2. Routes to off-chip inductors, L1 through L8, should be kept as short as possible.
3. VDD and control lines filtered internally providing high frequency isolation to 50 + GHz.

PACKAGE DETAILS


Package Drawing

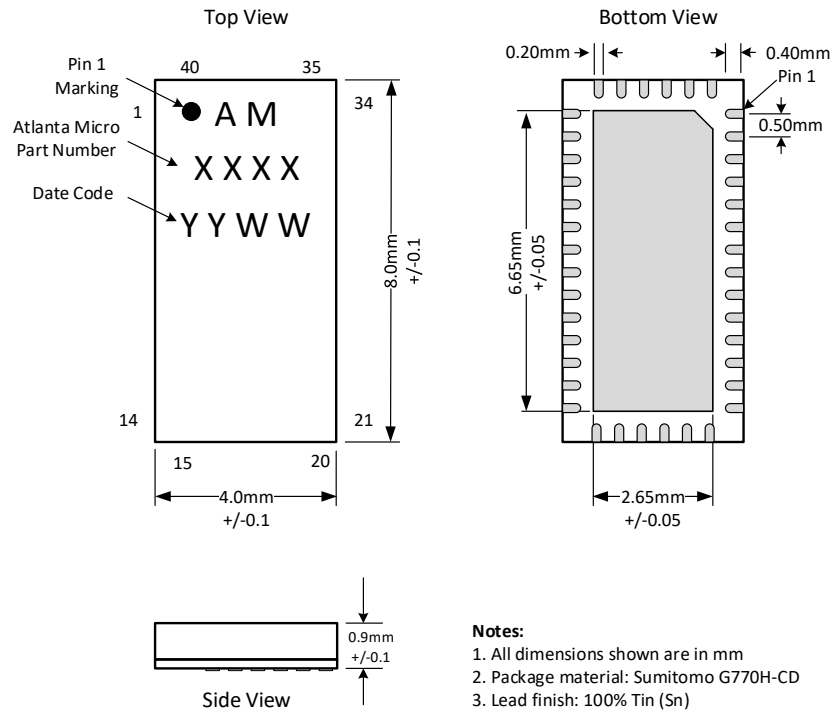

Recommended Footprint

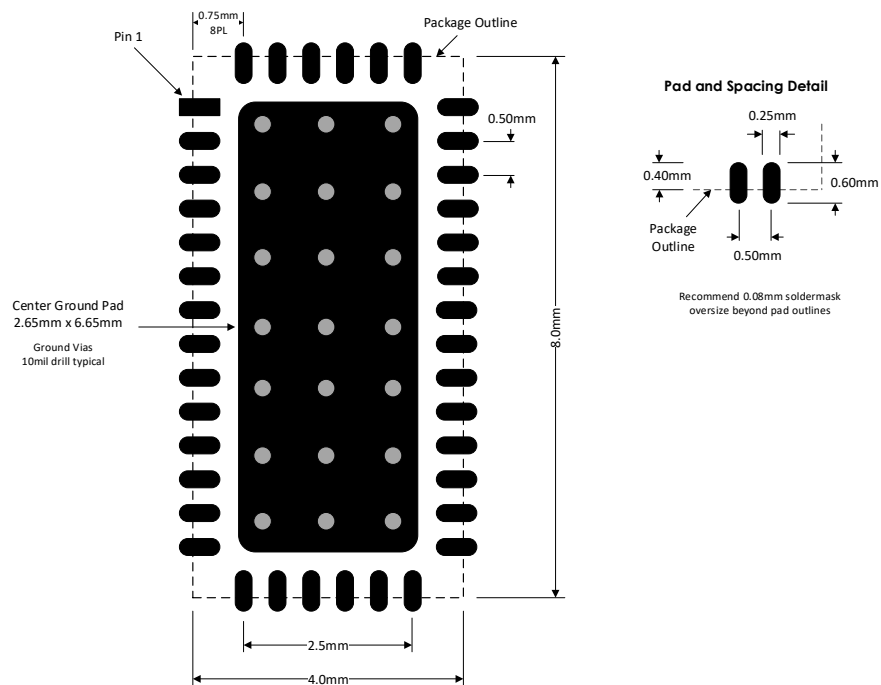

EVALUATION PC BOARD

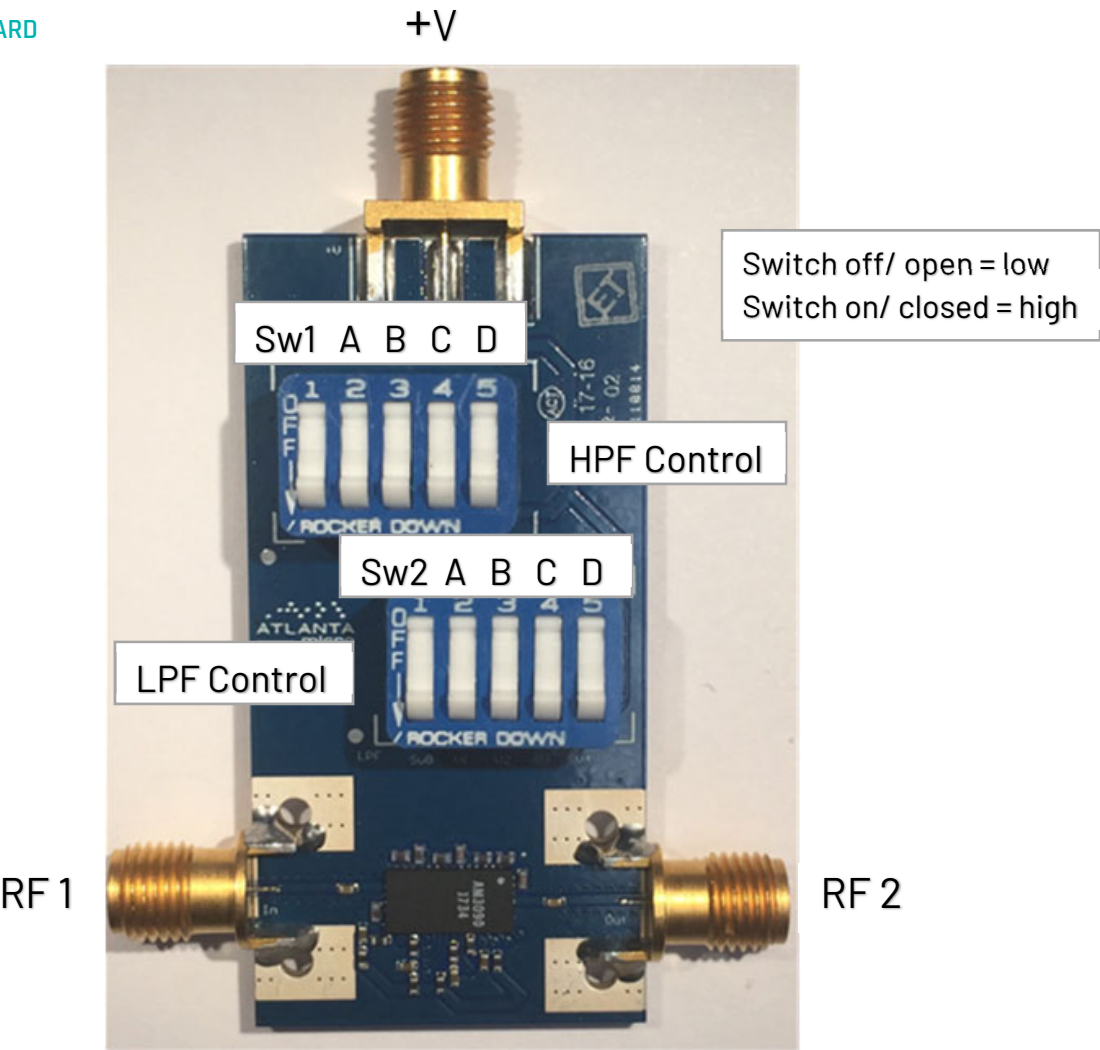

RELATED PARTS

Part Number		Description
AM3060	400 MHz to 6.5 GHz	Switched Digitally Tunable BPF Bank
AM3063	6.0 GHz to 18.0 GHz	Digitally Tunable Bandpass Filter Bank
AM3064	1.0 GHz to 6.5 GHz	Digitally Tunable Bandpass Filter Bank
AM3065	6 GHz to 12 GHz	Digitally Tunable Bandpass Filter
AM3066	12.0 GHz TO 26.5 GHz	Digitally Tunable Bandpass Filter Bank
AM3102	330 MHz to 1.2 GHz	Digitally Tunable Bandpass Filter
AM3103	1.0 GHz to 3.0 GHz	Digitally Tunable Bandpass Filter
AM3104	2.5 GHz to 6.5 GHz	Digitally Tunable Bandpass Filter

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

