


AM3134 – Analog Tunable Filter

Dual 2.0 to 3.2 GHz and 2.5 to 4.5 GHz Bandpass




The AM3134 is a dual MMIC analog voltage-tunable bandpass filter covering the 2.0 to 3.2 GHz and 2.5 to 4.5 GHz frequency ranges. Separate low-pass and high-pass tuning voltages provide independent control of both center frequency and bandwidth. AM3134 is packaged in a 5mm QFN package and operates over the -40 C to +85 C temperature range.



FEATURES

- Analog Tuning
- Independent LP and HP Control
- 7.5 dB Typical Insertion Loss
- +31 dBm Typical IIP3
- +83 dBm Typical IIP2
- +1V to +10V Tuning Voltage
- 5mm QFN Package
- -40C to +85C Operation

CHARACTERISTIC PERFORMANCE

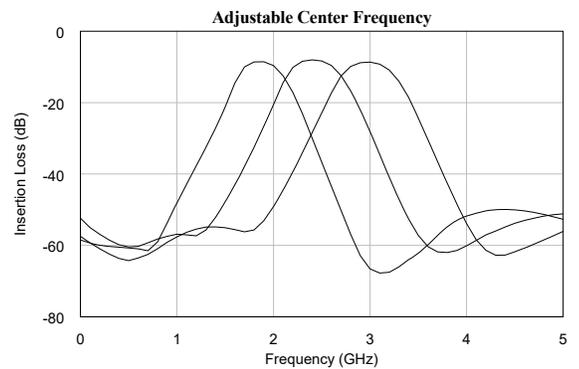

FUNCTIONAL DIAGRAM

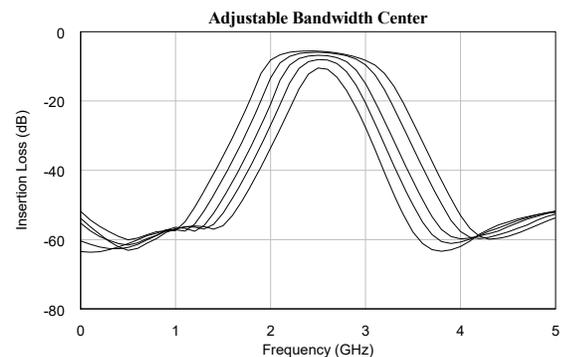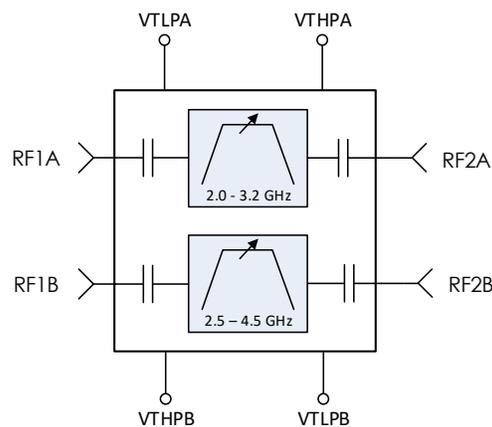

CONTENTS

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 5

TYPICAL APPLICATION..... 8

TYPICAL APPLICATION..... 9

EVALUATION PC BOARD.....10

RELATED PARTS.....10


COMPONENT COMPLIANCE INFORMATION..... 11

REVISION HISTORY

Date	Revision	Notes
March 15, 2018	1	Initial Release.
March 2, 2020	2	Updated for Latest Datasheet Format. More Comprehensive Data Added.
May 15, 2020	3	Package information moved to main product page.
July 2, 2024	4	Changed to Mercury branding. No content changes.

PIN LAYOUT AND DEFINITIONS

Note: All Non-Named Pins are NC (Not Connected)

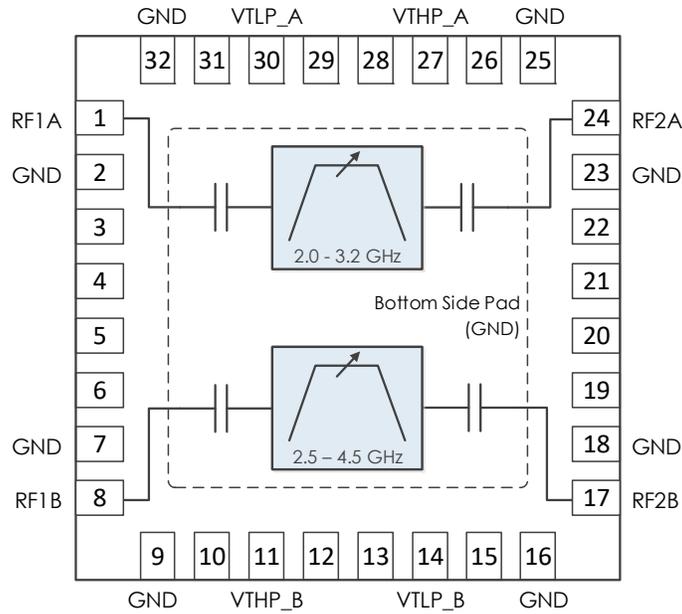

Pin	Name	Function
1	RF1A	RF1A - 50 Ohms - AC Coupled, No Blocking Cap Needed
2	GND	Ground - Common
3-6	NC	Not Connected, Recommended to Be Connected to Ground
7	GND	Ground - Common
8	RF1B	RF1B - 50 Ohms - AC Coupled, No Blocking Cap Needed
9	GND	Ground - Common
10	NC	Not Connected, Recommended to Be Connected to Ground
11	VTHP_B	High Pass DC Control Voltage, Channel B
12, 13	NC	Not Connected, Recommended to Be Connected to Ground
14	VTLP_B	Low Pass DC Control Voltage, Channel B
15	NC	Not Connected, Recommended to Be Connected to Ground
16	GND	Ground - Common
17	RF2B	RF2B - 50 Ohms - AC Coupled, No Blocking Cap Needed

Pin	Name	Function
18	GND	Ground - Common
19 - 22	NC	Not Connected, Recommended to Be Connected to Ground
23	GND	Ground - Common
24	RF2A	RF2A - 50 Ohms - AC Coupled, No Blocking Cap Needed
25	GND	Ground - Common
26	NC	Not Connected, Recommended to Be Connected to Ground
27	VTHP_A	High Pass DC Control Voltage, Channel A
28, 29	NC	Not Connected, Recommended to Be Connected to Ground
30	VTLP_A	Low Pass DC Control Voltage, Channel A
31	NC	Not Connected, Recommended to Be Connected to Ground
32	GND	Ground - Common
Bottom Pad	GND	Ground - Common

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
DC Control Voltage	0.0 V	+12.0 V
RF Input Power		+27 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-50 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
Storage Temperature Range (Recommended)	-50 C	+125 C
Moisture Sensitivity Level	MSL 3	



Mercury products are electrostatic sensitive. Follow safe handling practices to avoid damage.

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Control Voltage		+1.0 V		+10.0 V
DC Supply Current			< 1 mA	

Recommended Operating Conditions

	Minimum	Typical	Maximum
DC Control Voltage	+1.0 V		+10.0 V
Operating Case Temperature	-40 C		+85 C
Operating Junction Temperature	-40 C		+125 C

RF Performance

(T = 25 °C unless otherwise specified)


Param	Testing Conditions	Min	Typical	Max
Frequency Range	Band A	2.0 GHz		3.2 GHz
	Band B	2.5 GHz		4.5 GHz
Insertion Loss			7.5 dB	
Return Loss			15 dB	
Input IP3	Band A		+30 dBm	
	Band B		+31 dBm	
Input IP2	Band A		+83 dBm	
	Band B		+76 dBm	
Input P1dB			+25 dBm	

Timing Characteristics


Param	Min	Typical	Max
Tune Voltage Settling Time			2 μs / V

TYPICAL PERFORMANCE


Band A Adjustable Bandwidth Center

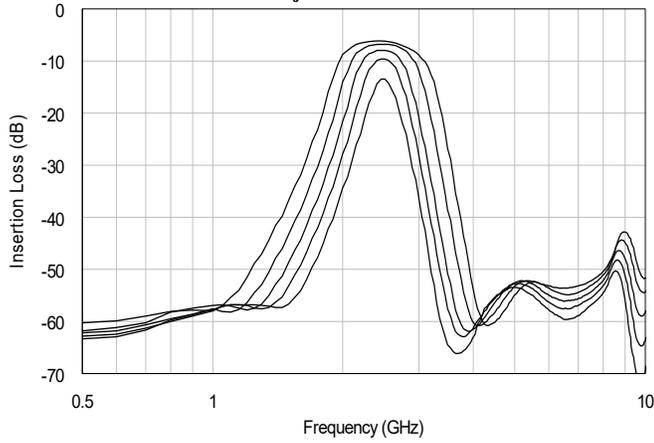


Band B Adjustable Bandwidth Center

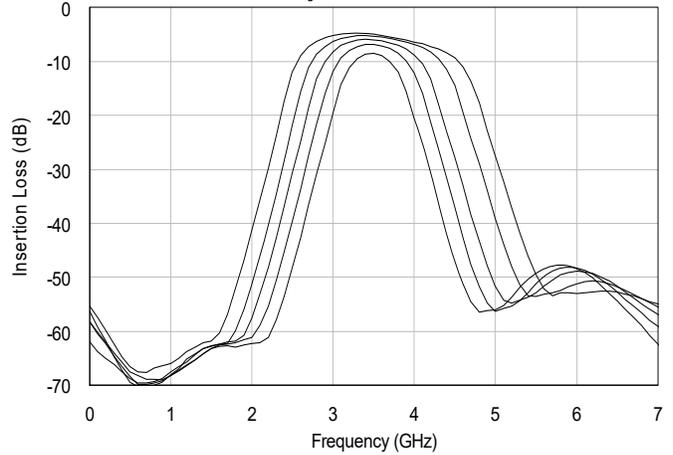


Band A Adjustable Bandwidth High

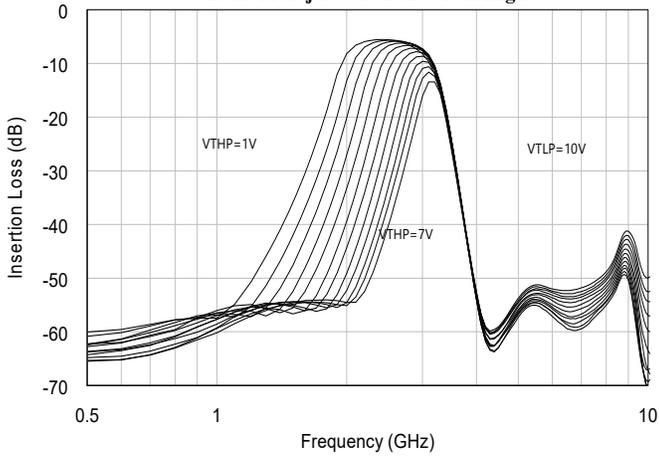


Band B Adjustable Bandwidth High

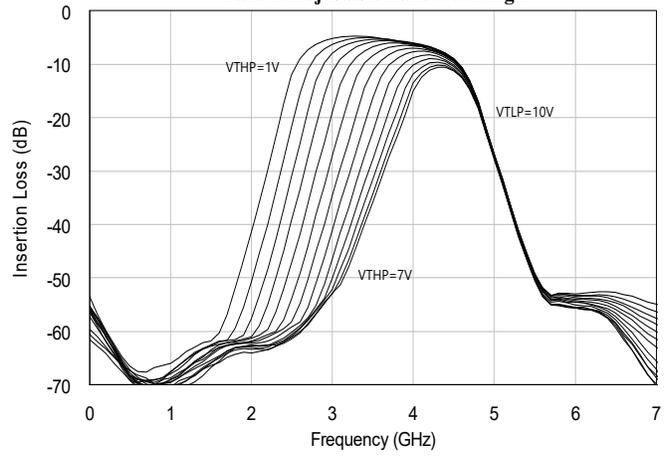







Band A Adjustable Bandwidth Low

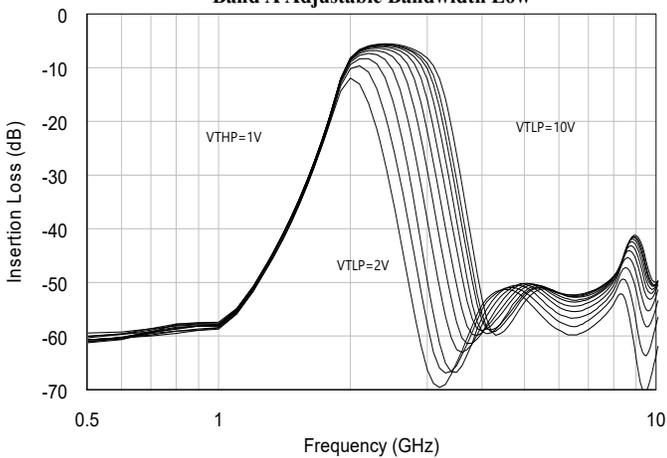

Band B Adjustable Bandwidth Low




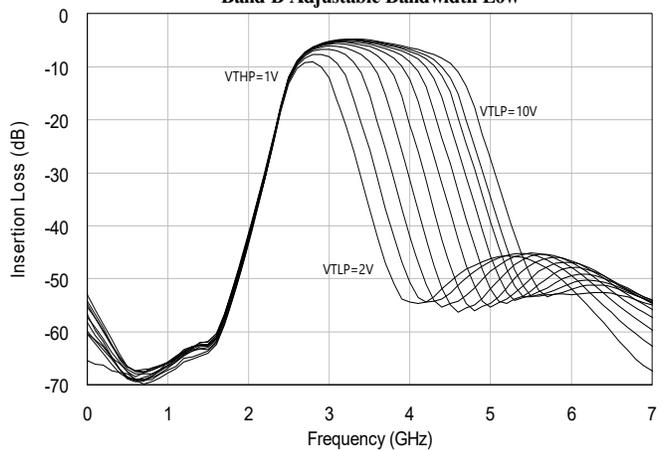


TYPICAL PERFORMANCE (CONTINUED)

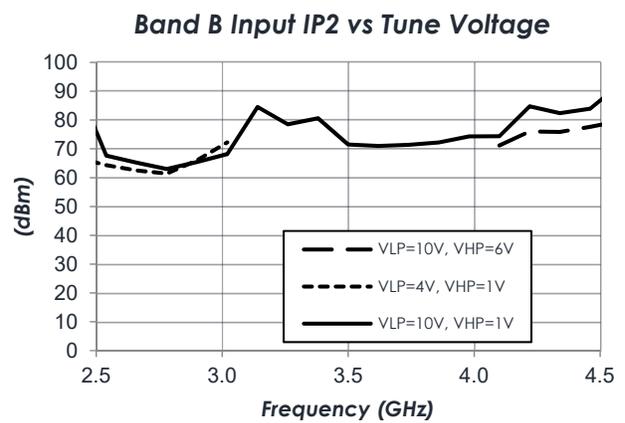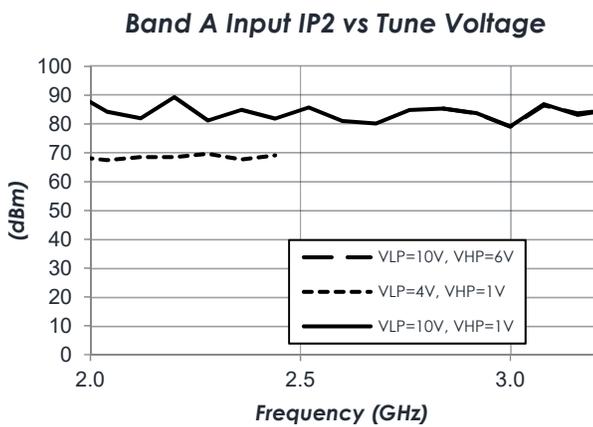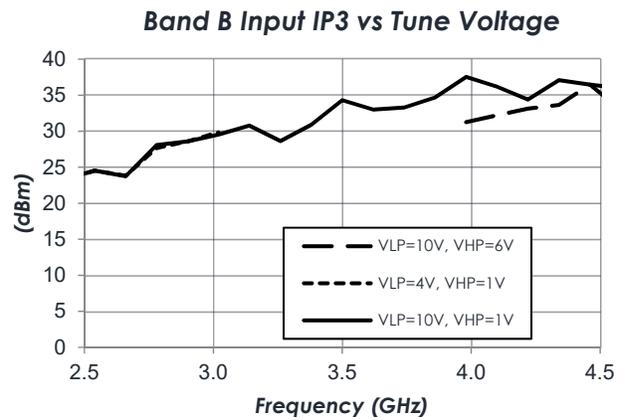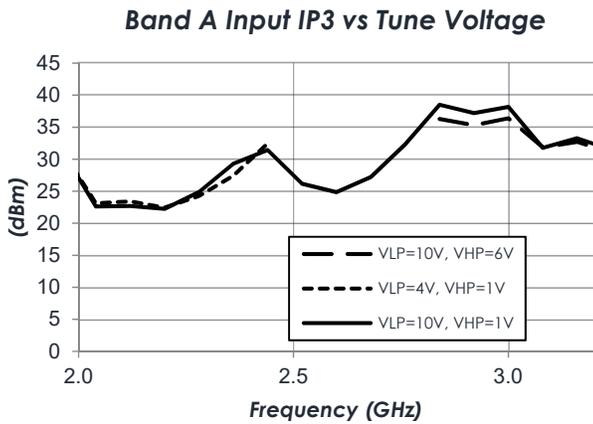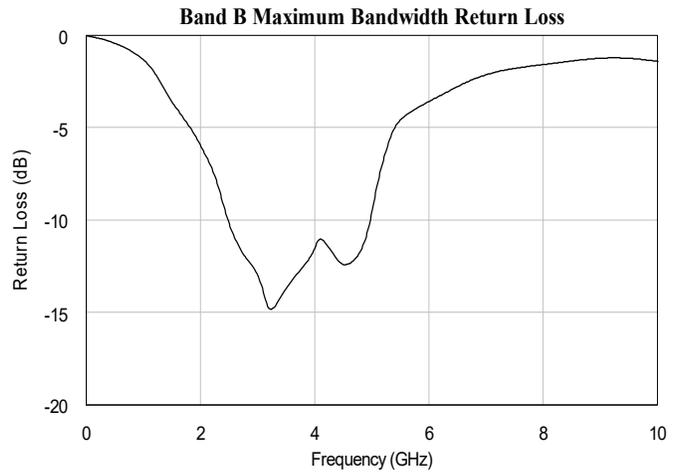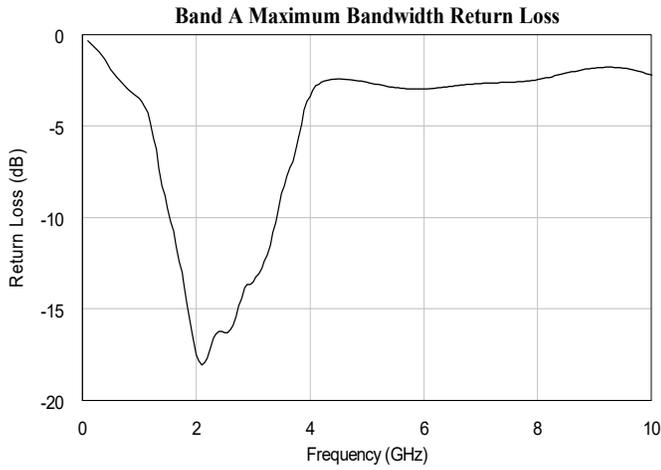


TYPICAL PERFORMANCE (CONTINUED)

(VLP=10V, VHP=1V unless otherwise specified)

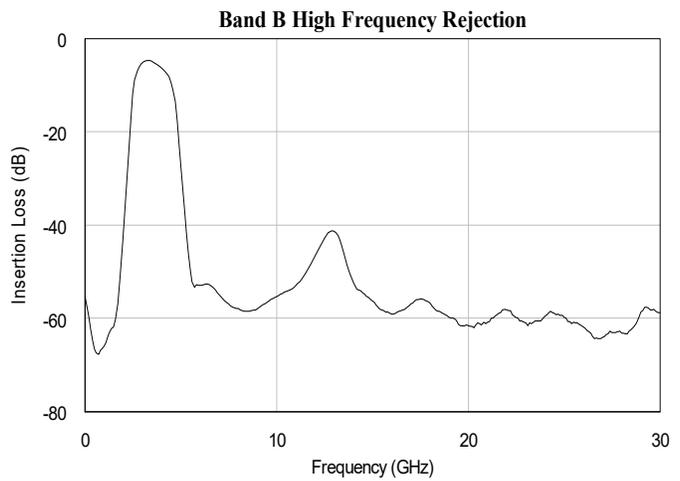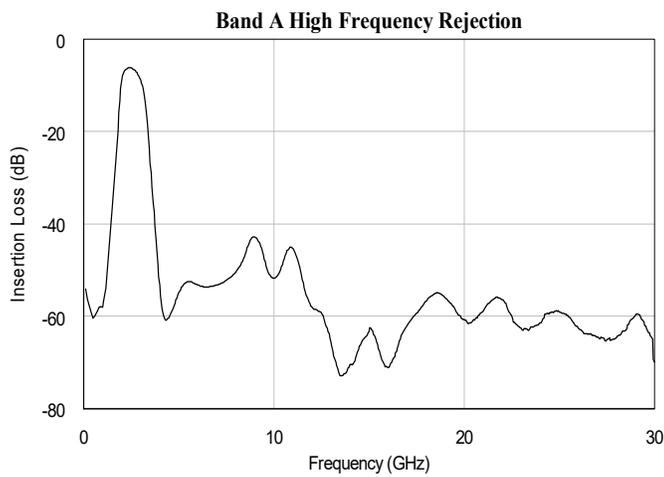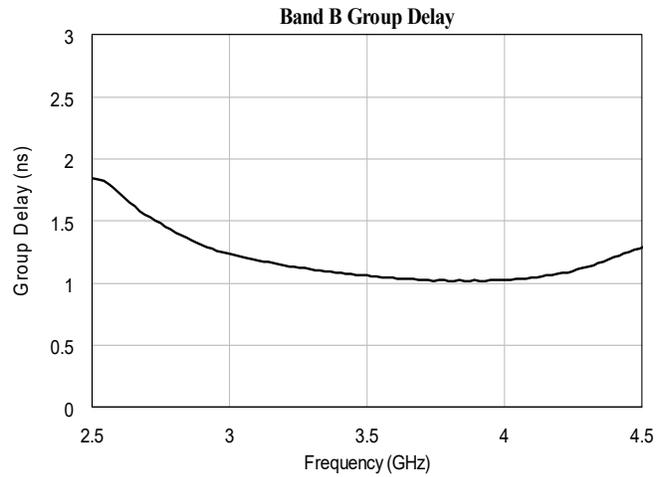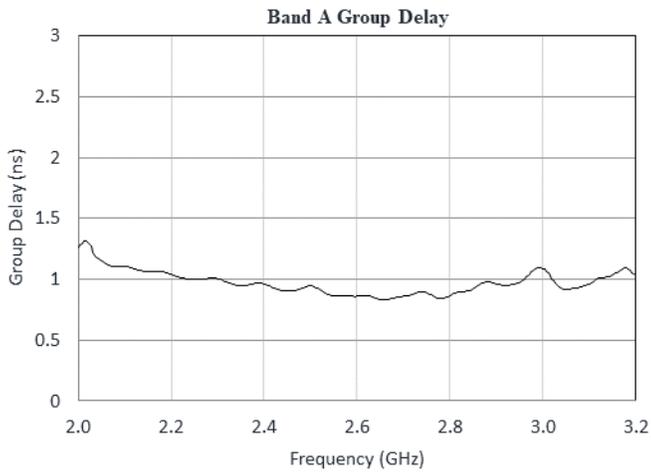

TYPICAL APPLICATION

Independent Low Pass and High Pass Control

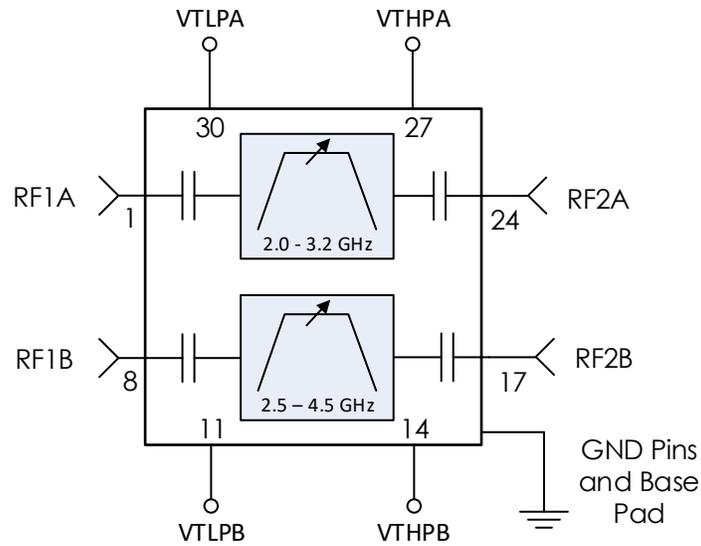


Notes:

1. RC filtering on the control lines is recommended to prevent digital noise from coupling to the RF path.
 - a. Select control line RC filter values based on desired logic source decoupling and switching speed.

TYPICAL APPLICATION

Single Control Voltage


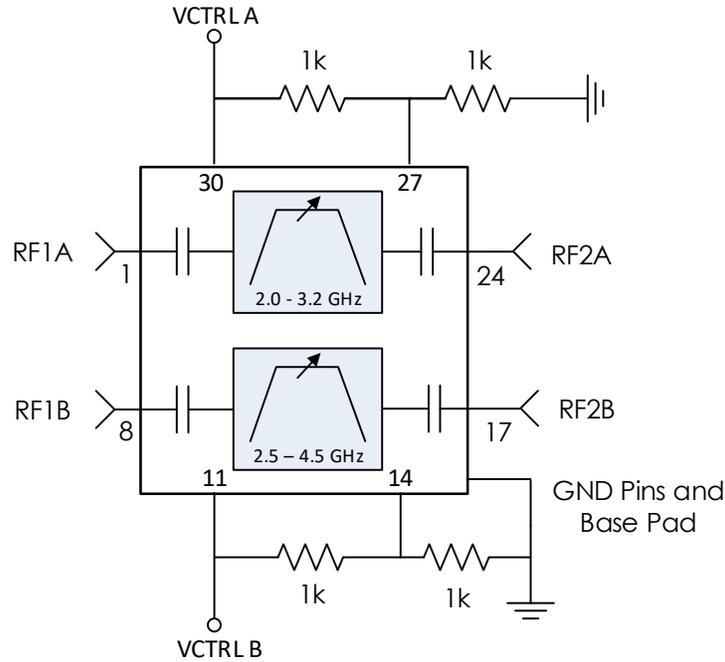


Notes:


1. RC filtering on the control lines is recommended to prevent digital noise from coupling to the RF path.
 - a. Select control line RC filter values based on desired logic source decoupling and switching speed.
2. The resistive dividers between pins 11 and 14 and 27 and 30 exist to normalize percentage bandwidth over the full 1-10 V range. Tying both pins to the same control voltage without the divider is possible, but the bandwidth will be narrower with higher insertion loss over the tuning range.

2.0 to 3.2 GHz Single Control Voltage:

2.5 to 4.5 GHz Single Control Voltage:

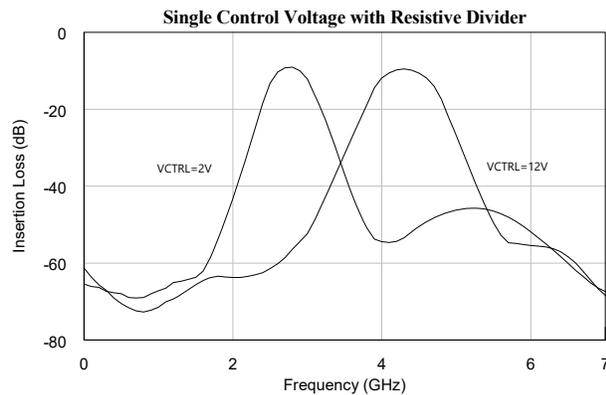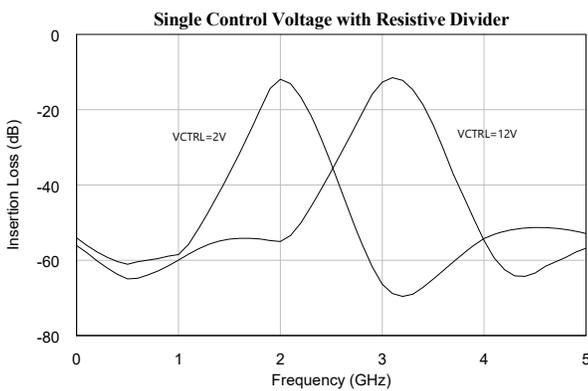

EVALUATION PC BOARD

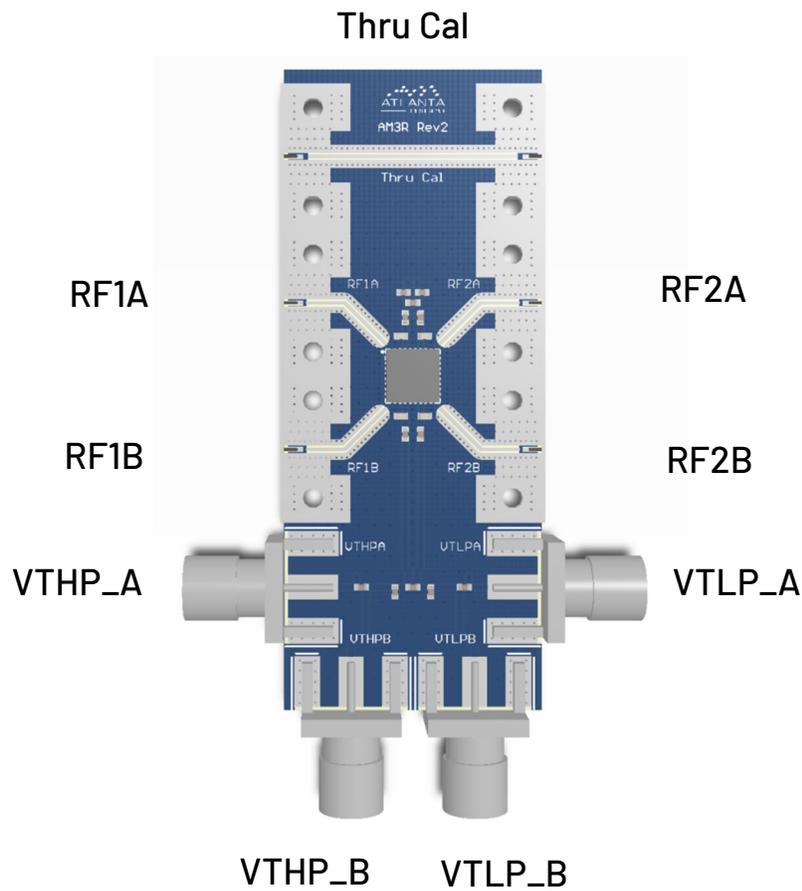

RELATED PARTS

Part Number	Description	
AM3063	6 GHz to 18 GHz	Digitally Tunable Bandpass Filter Bank
AM3064	1 GHz to 6.5 GHz	Digitally Tunable Bandpass Filter Bank
AM3066	12 GHz to 26.5 GHz	Digitally Tunable Bandpass Filter Bank
AM3135	3.5 GHz to 9 GHz	Analog Tunable Bandpass Filter Bank
AM3136	8 GHz to 19 GHz	Analog Tunable Bandpass Filter Bank
AM3089	2 GHz to 18 GHz	Analog Tunable Bandpass Filter Bank
AM3137	700 MHz to 2.0 GHz	Analog Tunable Notch Filter Bank
AM3138	1.3 GHz to 3.25 GHz	Analog Tunable Notch Filter Bank
AM3139	2.5 GHz to 6.0 GHz	Analog Tunable Notch Filter Bank

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

