

RESX07-4U21F

21" Deep, Front I/O Rugged Rack Server

Low-latency,
high-throughput
rugged rack server

- Dual Intel® 3rd generation Xeon® Scalable processors up to 32 cores
- Designed, tested and manufactured in the U.S.
- Configurable - up to 13 expansion slots that support 10 full-size GPUs
- NVMe storage – up to 8 E1.L SSDs



TECHNICAL SPECIFICATIONS

Dual Intel 3rd generation Xeon Scalable processors

3 UPI links up to 11.2 GT/s

32 DIMM slots, up to 4,096 GB DDR4-3200 MHz

Intel Trusted Execution Technology (TXT) with integrated TPM 2.0

Management and Operating System

Windows, Linux OS

OpenBMC

IPMI 2.0 management

Expansion and Modular Maintainability

Up to 13 expansions slots:

- Slot 1: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO
- Slot 2: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO
- Slot 3: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO
- Slot 4: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO
- Slot 5: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO
- Slot 6: PCIe gen 4.0 single-width x16 FHFL, up to 12" w/ FIO
- Slot 7: PCIe gen 4.0 single-width x16 FHFL, up to 12" w/ FIO (Dual-width if slot 6 is empty)
- Slot 8: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO (Single-width on RESX07-4U21FB)
- Slot 9: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO (Single-width on RESX07-4U21FA, not available on FB)
- Slot 10: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO (Not available on RESX07-4U21FA and FB)
- Slot 11: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ FIO (Not available on RESX07-4U21FA and FB)
- Slot 12: PCIe gen 4.0 single-width x16 FHFL, up to 12" w/ FIO (Not available on RESX07-4U21FA and FB)
- Slot 13: OCP 3.0 PCIe gen 4.0 x16 w/ FIO


Up to 8, 2.5" SATA/SAS drives (U.2 option available) or 8 E1.L NVMe storage drives

Up to 2 NVMe M.2 slots

Power Supply Options

Dual-redundant (2+2) AC power option:
2000 W per PSU 120V AC/240 VAC,
4000 W total with redundancy
(240 VAC only)

Partnering with



Environmental*

[Rugged Level 1 Standards](#)

(EXCEPTION: CE-102 not supported)

Additional Options

Shock pins

Slide rails

Mechanical

Height: 4U or 7" (177.8 mm)

Width: 17.26" (438.4 mm)


Depth: 20.73" (526.5 mm) from front to back, 20" (508 mm) from ear to back

Weight (Typical)*: 48 lb

19" rackmountable

* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Product Naming Chart

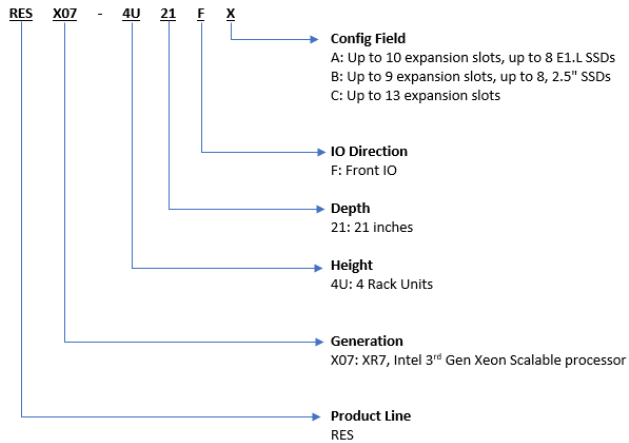

Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International
 Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 51 00 tel

Learn more

Visit: mrcy.com/servers

Contact: servers@mrcy.com



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, and BuiltSECURE. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

