


AM3041 – Tunable Filter

Digitally Tunable 6 GHz to 10 GHz Highpass




AM3041 is a miniature digitally tunable highpass filter covering the 6 to 10 GHz frequency range. The filter provides 16 selectable highpass cutoff states with four digital control bits. The tunable highpass filter can be combined with one of Mercury’s tunable lowpass filters to provide a flexible tunable bandpass filter solution. AM3041 is packaged in a 4mm QFN package and operates over the -40C to +100C temperature range.



FEATURES

- Discrete high pass cutoff steps
- 4-bit control, 3V or 5V logic
- No calibration required
- 5V DC supply
- 4mm QFN package
- -40C to +100C operation

FUNCTIONAL DIAGRAM

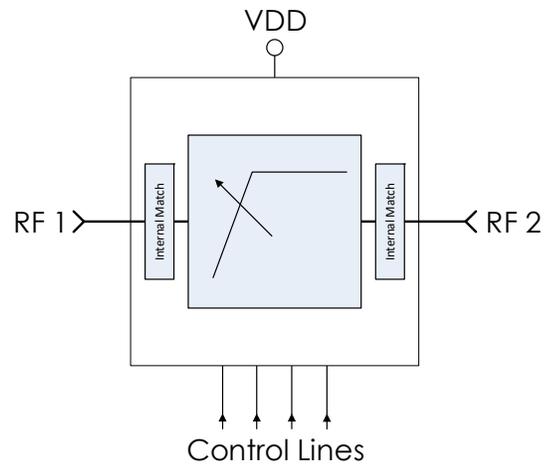

CHARACTERISTIC PERFORMANCE

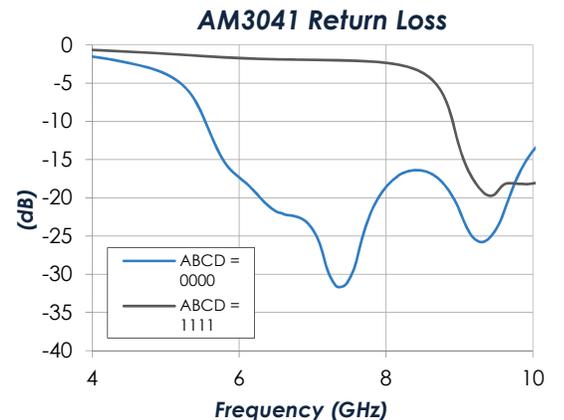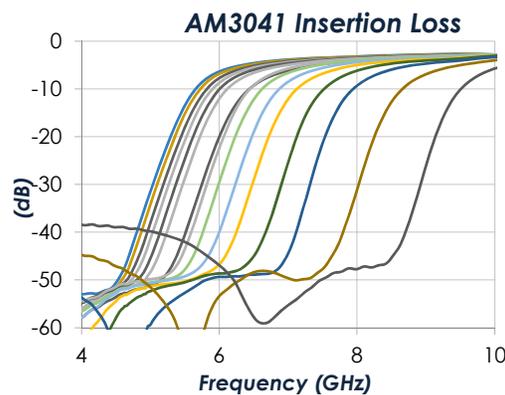

CONTENTS

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 7

TYPICAL APPLICATION..... 8

EVALUATION PC BOARD.....10


RELATED PARTS10

COMPONENT COMPLIANCE INFORMATION 11

REVISION HISTORY

| Date | Revision | Notes |
|-------------------|----------|---|
| May 16, 2016 | 1 | Initial Release. |
| May 16, 2016 | 2 | Updated NC pin recommendation, updated VDD supply range, corrected state table. |
| May 20, 2016 | 3 | Updated recommended components, added wideband plot, increased max RF input level. |
| January 20, 2017 | 4 | Updated business address. |
| February 16, 2017 | 5 | Added recommended footprint. |
| June 7, 2021 | 6 | Extended operating temperature to +100C, added group delay plots, moved package information to separate document, updated datasheet format. |
| June 20, 2024 | 7 | Changed to Mercury branding. No content changes. |

PIN LAYOUT AND DEFINITIONS

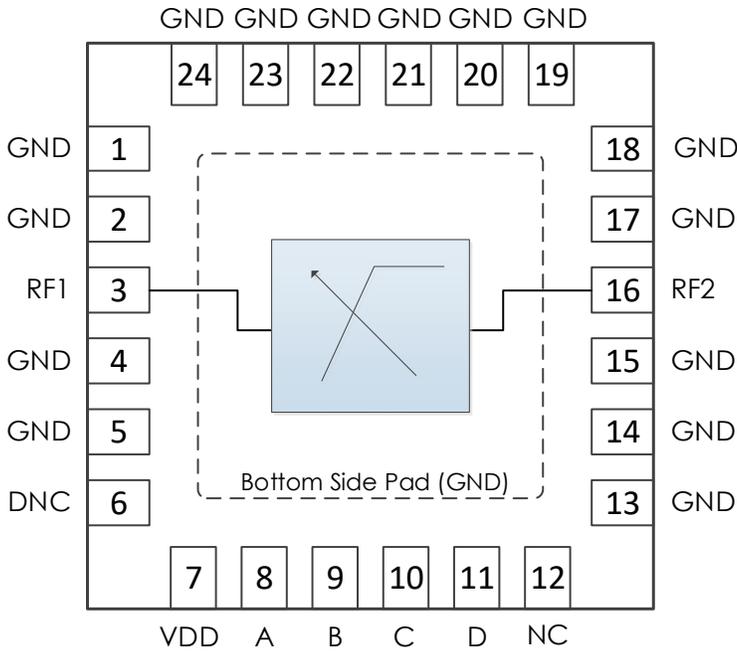

| Pin | Name | Function |
|----------|------|---|
| 1 - 2 | GND | Ground - Common |
| 3 | RF 1 | RF Port 1 - 50 ohms, DC coupled. External AC coupling capacitor required. |
| 4 - 5 | GND | Ground - Common |
| 6 | DNC | Do Not Connect |
| 7 | VDD | +5.0V DC Power Input |
| 8 | A | Filter Control Bit A |
| 9 | B | Filter Control Bit B |
| 10 | C | Filter Control Bit C |
| 11 | D | Filter Control Bit D |
| 12 | NC | Not Connected. Pin may be grounded or left floating. |
| 13 - 15 | GND | Ground - Common |
| 16 | RF 2 | RF Port 2 - 50 ohms, DC coupled. External AC coupling capacitor required. |
| 17 - 24 | GND | Ground - Common |
| Base Pad | GND | Ground - Common |

SPECIFICATIONS

Absolute Maximum Ratings

| | Minimum | Maximum |
|--------------------------------|---------|---------|
| Supply Voltage | -0.3 V | +6.0 V |
| RF Input Power | | +27 dBm |
| Operating Junction Temperature | -40 C | +150 C |
| Storage Temperature Range | -55 C | +150 C |

Recommended Operating Conditions

| | Minimum | Typical | Maximum |
|--------------------------------|---------|---------|---------|
| Supply Voltage | | +5.0 V | |
| Operating Case Temperature | -40 C | | +100 C |
| Operating Junction Temperature | -40 C | | +125 C |

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

| | Minimum | Maximum |
|---|---------|---------|
| Storage Temperature Range (Recommended) | -50 C | +125 C |
| Moisture Sensitivity Level | MSL 1 | |



Mercury products are electrostatic sensitive. Follow safe handling practices to avoid damage.

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

| Param | Testing Conditions | Min | Typical | Max |
|-------------------|--------------------|--------|---------|--------|
| DC Supply Voltage | | +4.7 V | +5.0 V | +5.2 V |
| DC Supply Current | VDD = +5.0 V | | 1 mA | |
| Power Dissipated | VDD = +5.0 V | | 5 mW | |
| Logic Level Low | | -0.1 V | | +0.5 V |
| Logic Level High | | +2.0 V | | +5.0 V |

RF Performance

(T = 25 °C unless otherwise specified)

| Param | Testing Conditions | Min | Typical | Max |
|------------------------|-------------------------|-------|---------|--------|
| Cutoff Frequency Range | | 6 GHz | | 10 GHz |
| Insertion Loss | f = 6 GHz, ABCD = 0000 | | 6.4 dB | |
| | f = 8 GHz, ABCD = 0000 | | 3.2 dB | |
| | f = 10 GHz, ABCD = 0000 | | 2.8 dB | |
| Return Loss | f = 6 GHz, ABCD = 0000 | | 17 dB | |
| | f = 8 GHz, ABCD = 0000 | | 19 dB | |
| | f = 10 GHz, ABCD = 0000 | | 14 dB | |
| Input IP3 | ABCD = 1111 | | +40 dBm | |

Timing Characteristic






| | Minimum | Typical | Maximum |
|-----------------|---------|---------|---------|
| Switching Speed | | | 1 μs |

State Table

| D | C | B | A | Typical Cutoff Freq. (GHz) |
|---|---|---|---|----------------------------|
| L | L | L | L | 6.00 |
| L | L | L | H | 6.07 |
| L | L | H | L | 6.19 |
| L | L | H | H | 6.30 |
| L | H | L | L | 6.41 |
| L | H | L | H | 6.55 |
| L | H | H | L | 6.76 |
| L | H | H | H | 6.85 |
| H | L | L | L | 6.95 |
| H | L | L | H | 7.05 |
| H | L | H | L | 7.31 |
| H | L | H | H | 7.58 |
| H | H | L | L | 7.96 |
| H | H | L | H | 8.40 |
| H | H | H | L | 9.10 |
| H | H | H | H | 9.87 |


TYPICAL PERFORMANCE

(T = 25 °C unless otherwise specified. Only some states shown for simplicity. Refer to s-parameters available for download on the Mercury website for more information.)

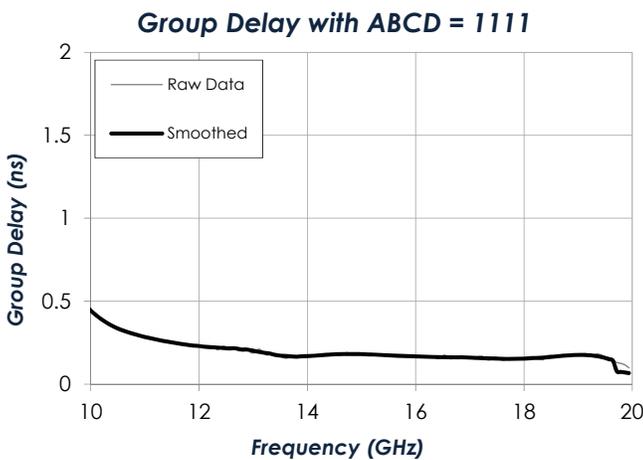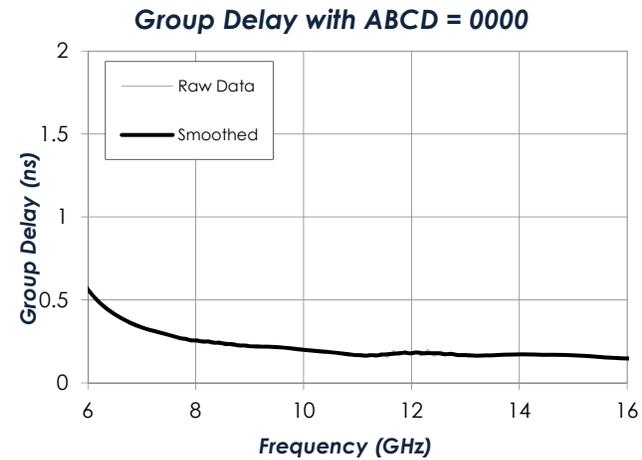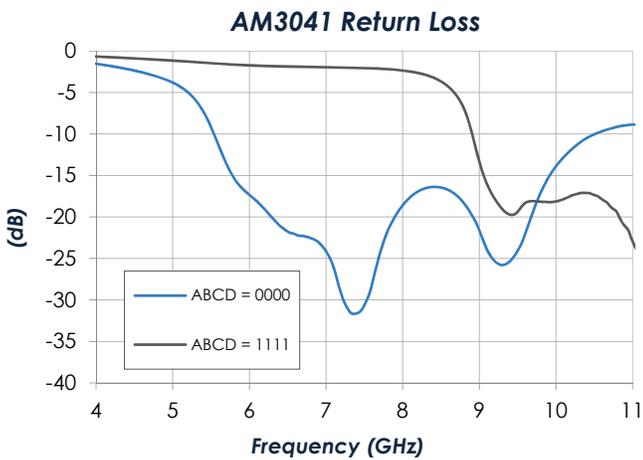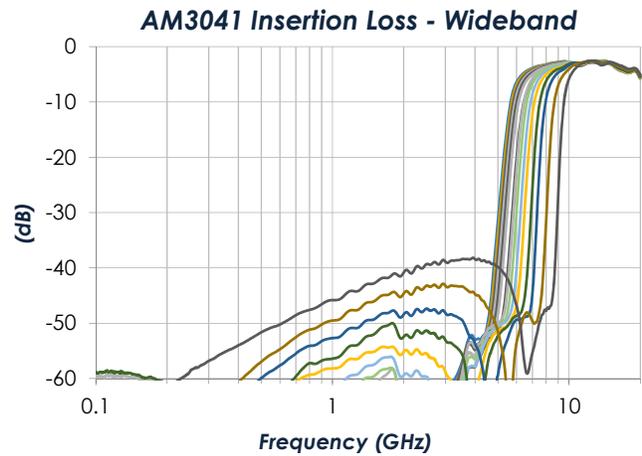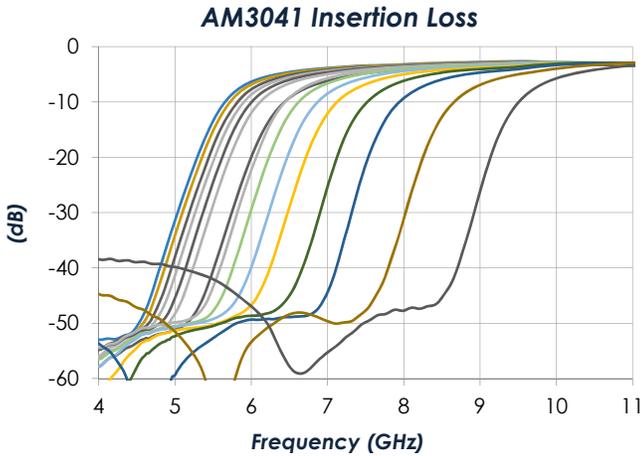

TYPICAL APPLICATION

Multiple Passives

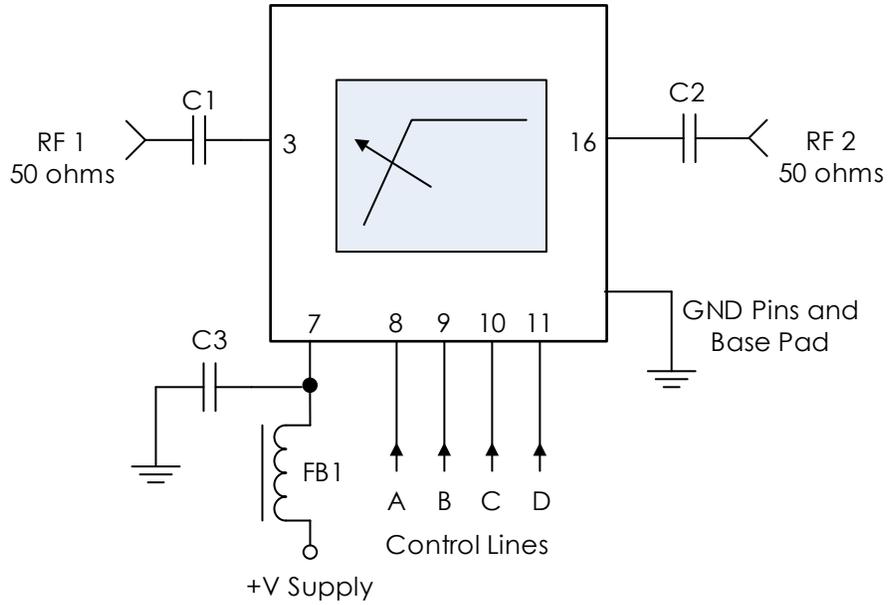


Recommended Component List (or Equivalent)

| Part | Value | Part Number | Manufacturer |
|--------|--------|---------------------|---------------|
| C1, C2 | 0.1 uF | 0402BB104KW160 | Passives Plus |
| C3 | 0.1 uF | C1005X7R1H104K050BB | TDK |
| FB1 | - | MMZ1005A222E | TDK |

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. RC filtering on the control lines is recommended to prevent digital noise from coupling to the RF path.
 - a. Select control line RC filter values based on desired logic source decoupling and switching speed.

Smallest Footprint

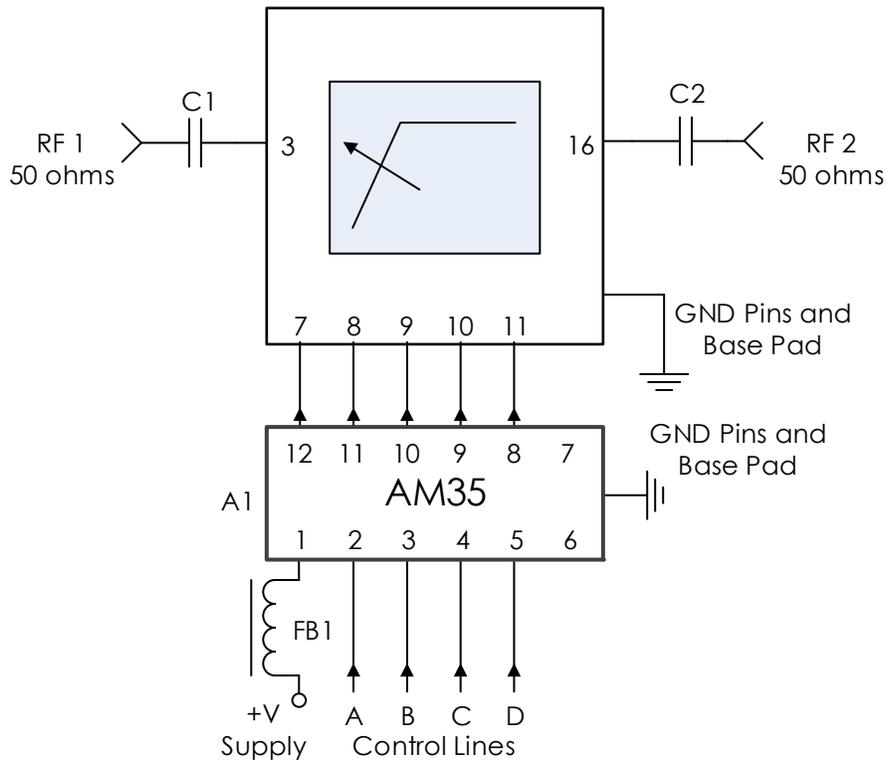


Recommended Component List (or Equivalent)

| Part | Value | Part Number | Manufacturer |
|--------|--------|----------------|---------------|
| C1, C2 | 0.1 uF | 0402BB104KW160 | Passives Plus |
| FB1 | - | MMZ1005A222E | TDK |
| A1 | - | AM35 | Mercury |

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. AM35 provides power and control line filtering with high frequency isolation to 40+ GHz.
 - a. AM35 is a 1.5mm x 3mm (0.5mm pitch) EMI filter bank providing a small total footprint for applications with tight space requirements.
 - b. Ferrite bead in series with power line provides better low frequency isolation.
 - c. See AM35 datasheet for performance details.

EVALUATION PC BOARD

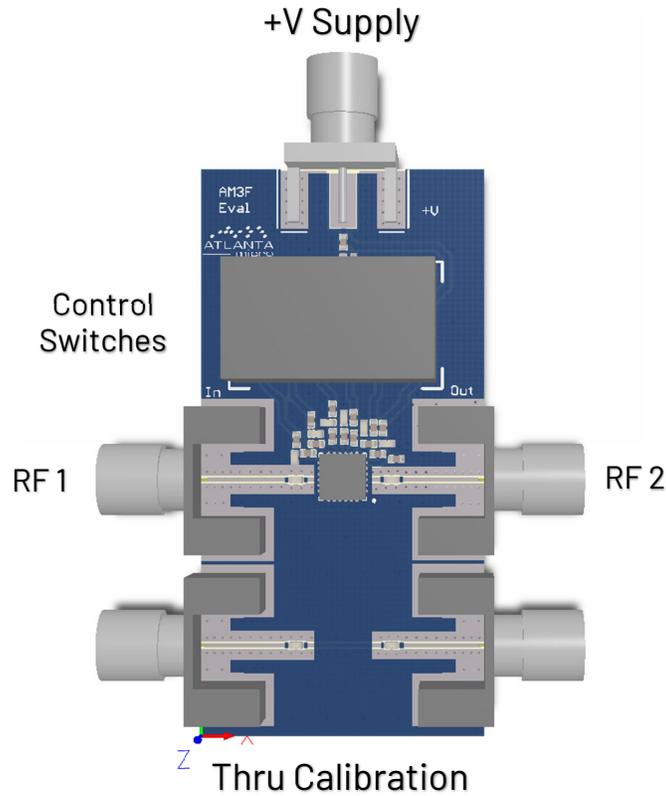

RELATED PARTS

| Part Number | | Description |
|-------------|--------------------|----------------------------|
| AM35 | 100 MHz to 40 GHz | Stopband, EMI filter bank |
| AM3150 | 30 MHz to 550 MHz | Digitally Tunable Lowpass |
| AM3034 | 150 MHz to 450 MHz | Digitally Tunable Lowpass |
| AM3029 | 1.5 GHz to 3 GHz | Digitally Tunable Lowpass |
| AM3107 | 6 GHz to 12 GHz | Digitally Tunable Lowpass |
| | | Digitally Tunable Lowpass |
| AM3151 | 20 MHz to 320 MHz | |
| AM3033 | 100 MHz to 225 MHz | Digitally Tunable Highpass |
| AM3036 | 330 MHz to 700 MHz | Digitally Tunable Highpass |
| AM3031 | 1.0 GHz to 1.8 GHz | Digitally Tunable Highpass |
| AM3032 | 2.5 GHz to 4.5 GHz | Digitally Tunable Highpass |
| AM3039 | 9 GHz to 18 GHz | Digitally Tunable Highpass |

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

| Substance List | Allowable Maximum Concentration |
|---------------------------------------|---------------------------------|
| Lead (Pb) | <1000 PPM (0.1% by weight) |
| Mercury (Hg) | <1000 PPM (0.1% by weight) |
| Cadmium (Cd) | <75 PPM (0.0075% by weight) |
| Hexavalent Chromium (CrVI) | <1000 PPM (0.1% by weight) |
| Polybrominated Biphenyls (PBB) | <1000 PPM (0.1% by weight) |
| Polybrominated Diphenyl ethers (PBDE) | <1000 PPM (0.1% by weight) |
| Decabromodiphenyl Deca BDE | <1000 PPM (0.1% by weight) |
| Bis (2-ethylhexyl) Phthalate (DEHP) | <1000 PPM (0.1% by weight) |
| Butyl Benzyl Phthalate (BBP) | <1000 PPM (0.1% by weight) |
| Dibutyl Phthalate (DBP) | <1000 PPM (0.1% by weight) |
| Diisobutyl Phthalate (DIBP) | <1000 PPM (0.1% by weight) |

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury’s supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International
 Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury’s internal processes and methods. The information contained in this document is subject to change at any time without notice.

