

# RESX07-3U22R

## 22" Deep, Rear I/O Rugged Rack Server

Low-latency,  
high-throughput  
rugged rack server

- Dual Intel® 3rd generation Xeon® Scalable processors up to 32 cores
- Designed, tested and manufactured in the U.S.
- Configurable - up to 7 expansion slots that support 4 full-size GPUs
- Storage – up to 16, 2.5" SSDs



### TECHNICAL SPECIFICATIONS

Dual Intel 3rd generation Xeon Scalable processors

3 UPI links up to 11.2 GT/s

16 DIMM slots, up to 2,048 GB DDR4-3200 MHz

Intel Trusted Execution Technology (TXT) with integrated TPM 2.0

### Management and Operating System

Windows, Linux OS

OpenBMC

IPMI 2.0 management

### Expansion and Modular Maintainability

Up to 7 expansions slots:

- Slot 1: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 2: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 3: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 4: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 5: PCIe gen 4.0 single-width x16 FHFL, up to 7.5" w/ RIO
- Slot 6: PCIe gen 4.0 single-width x16 FHFL, up to 7.5" w/ RIO

- Slot 7: PCIe gen 4.0 single-width x8 FHHL, up to 7.5" w/ RIO

Up to 16, 2.5" SATA/SAS drives (U.2 option available)

Up to 2 NVMe M.2 slots

### Power Supply Options

Triple-redundant (2+1) AC and DC options:

- 1000 W 48 VDC per PSU
- 800 W 28 VDC per PSU
- 1200 W 120 VAC per PSU
- 1600 W 240 VAC per PSU
- 240 VAC per PSU
- MIL-461 options: 3x MIL-STD 750 W 120 VAC, 28 VDC 500 W

### Environmental\*

#### [Rugged Level 1 Standards](#)

Tested to support full performance of Intel Gold CPUs up to 50C and dual 300W NVIDIA GPUs up to 41C without throttling

### Additional Options

Shock pins

Slide rails

Partnering with



**Mechanical**

Height: 3U or 5.25" (133.35 mm)

Width: 17.36" (440.9 mm)


Depth: 22" (558.8 mm) from front to back, 21" (533.4 mm) from ear to back

Weight (Typical)\*: 35 lb

19" rackmountable

\* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

**Product Naming Chart**

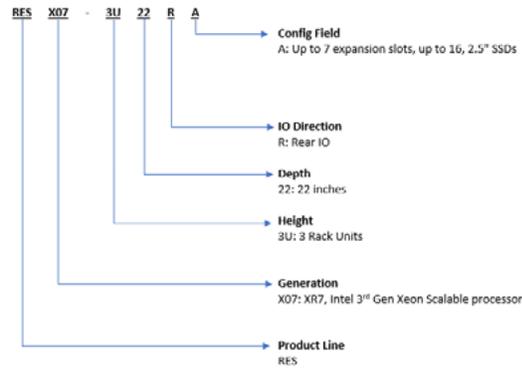

Front View



Rear View



**Corporate Headquarters**

50 Minuteman Road  
Andover, MA 01810 USA  
+1 978.967.1401 tel  
+1 866.627.6951 tel  
+1 978.256.3599 fax

**International Headquarters**

**Mercury International**

Avenue Eugène-Lance, 38  
PO Box 584  
CH-1212 Grand-Lancy 1  
Geneva, Switzerland  
+41 22 884 51 00 tel

**Learn more**

Visit: [mrcy.com/servers](http://mrcy.com/servers)

Contact: [servers@mrcy.com](mailto:servers@mrcy.com)



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

