

FDISK-8510

3U OpenVPX Storage Module

Capture critical mission, flight and machine learning (ML) data in the air

- Up to 16 TB NVMe storage
- 450+ MB/s read and 1400+ MB/s write speeds
- FIPS-140 encryption option
- Built-in error correction algorithm and low UBER rate
- Rugged and aircraft ready



TECHNICAL SPECIFICATIONS

Storage

Up to 16 TB storage (8 or 16 TB options)

Secure latch to lock drive in place

2D MLC NAND flash technology

Error correction algorithm:
BCH 120 bits/2 kbytes

Uncorrectable bit error rate (UBER)
of 10^{-18}

Discrete pin for secure erase and zeroization

Encryption options: AES-256 bit or FIPS-140

Fabric Interface

PCIe 2.0 x 4 host protocol*

Sequential read: 450+ MB/s

Sequential write: 1400+ MB/s

* throughput was measured at a 25°C temperature setting

Mechanical

3U OpenVPX, 1.0" slot pitch, VITA 65

Rugged and Low Power

Temperature: -40°C to 85°C card edge

Power fail support

Static and dynamic wear-leveling support

Conduction cooled


Low power consumption

8 TB: ~10 W

16 TB: ~13 W

[Advanced rugged packaging options](#)

FDISK-8510 Block Diagram

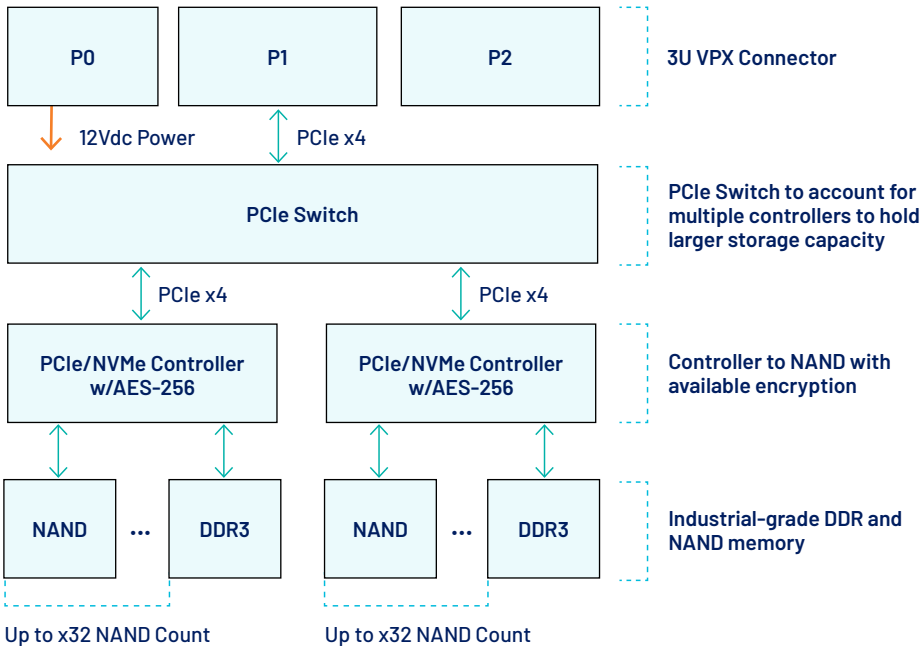

Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+41 22 884 51 00 tel

Learn more

Visit: mrcy.com/contact-us



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, and BuiltSECURE. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

