

RESX07-1U21R

21" Deep, Rear I/O Rugged Rack Server

Low-latency,
high-throughput
rugged rack server

- Dual Intel® 3rd generation Xeon® Scalable processors up to 32 cores
- Configurable - up to 4 expansion slots
- Designed, tested and manufactured in the U.S.
- Storage - up to 8, 2.5" SSDs



TECHNICAL SPECIFICATIONS

Dual Intel 3rd generation Xeon Scalable processors
3 UPI links up to 11.2 GT/s
16 DIMM slots, up to 2,048 GB DDR4-3200 MHz
Intel Trusted Execution Technology (TXT) with integrated TPM 2.0

Management and Operating System

Windows, Linux OS
OpenBMC
IPMI 2.0 management

Expansion and Modular Maintainability

Up to 4 expansions slots:

- Slot 1: PCIe gen 4.0 single-width x16 FH, up to 6.8" length w/ RIO
- Slot 2: PCIe gen 4.0 single-width x16 FH, up to 6.8" length w/ RIO
- Slot 3: OCP 3.0 gen 4.0 x16 w/ RIO
- Slot 4: OCP 3.0 gen 4.0 x16 w/ RIO

Up to 8, 2.5" SATA/SAS drives (U.2 option available)
1 NVMe M.2 slots

Power Supply Options

Single or Redundant 100/240 V VAC (47/63 Hz, 400 Hz)
Single or Redundant 10-36 VDC, 32 Amps
Single or Redundant 36-72 VDC, 18 Amps
MIL-STD 461

Environmental* [Rugged Level 1 Standards](#)

Additional Options

Shock pins
Slide rails

Mechanical


Height: 1U or 1.75" (44.45 mm)
Width: 17.06" (433.32 mm)
Depth: 20.73" (526.5 mm) from front to back, 20" (508 mm) from ear to back
Weight (Typical)*: 23 lb
19" rackmountable

* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Partnering with



Product Naming Chart

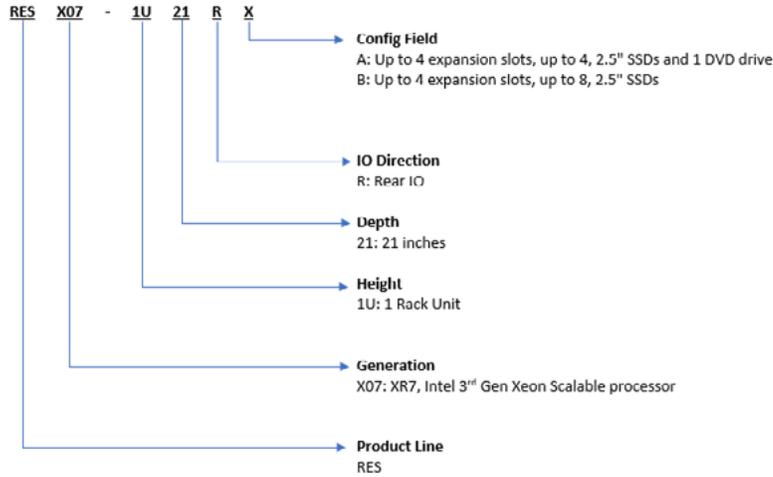

RESX07-1U21RA



Front View



Rear View



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 51 00 tel

Learn more

Visit: mercy.com/servers

Contact: servers@mercy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

