


AM1172-D - Amplifier 18 to 50 GHz Driver Amplifier

AM1172-D is a wideband, cascadable amplifier servicing the 18 to 50 GHz frequency range. The device exhibits moderate gain and great linearity making it an excellent choice for a medium power driver amplifier for high frequency applications. Available as bare die in a 2.10mm x 1.34mm footprint with internal 50Ω matching and DC blocking capacitors, the AM1172-D is a small form-factor solution that can enable low SWaP applications.


FEATURES


- 17.5 dB Gain
- +29.5 dBm 0IP3
- +18.5 dBm P1dB
- 3.4 dB Noise Figure
- +5V/163 mA Operation
- 2.10mm x 1.34mm Bare Die
- -40C to +85C Operation

FUNCTIONAL DIAGRAM

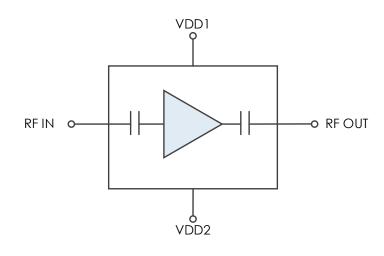


CHARACTERISTIC PERFORMANCE





TECHNICAL DATA SHEET





CONTENTS


ATURES	′
NCTIONAL DIAGRAM	1
IARACTERISTIC PERFORMANCE	
VISION HISTORY	2
N LAYOUT AND DEFINITIONS	3
ECIFICATIONS	
PICAL PERFORMANCE	5
PICAL APPLICATION	6
E DIMENSIONS	7
RT ORDERING DETAILS	7
COMMENDED WIRE BONDS	8
LATED PARTS	8
MPONENT COMPLIANCE INFORMATION	6

REVISION HISTORY

Date	Revision	Notes
August 2, 2024	1	Initial Release



PIN LAYOUT AND DEFINITIONS

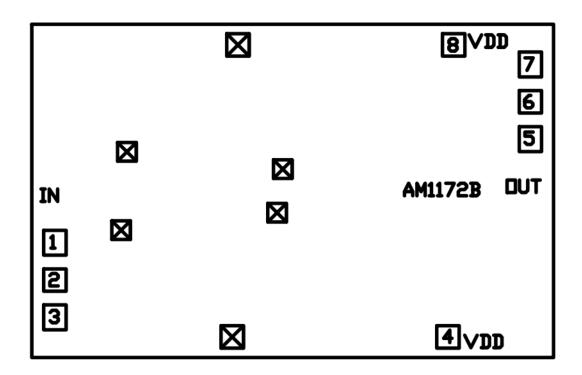

Pin	Name	Function
1	GND	Ground - Common
2	RF In	RF Input - 50 Ohms - AC Coupled
3	GND	Ground - Common
4	VDD	DC Power Input
5	GND	Ground - Common
6	RF Out	RF Output - 50 Ohms - AC Coupled
7	GND	Ground - Common
8	VDD	DC Power Input



SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+5.5 V
RF Input Power		15 dBm
Storage Temperature Range	-55 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
ESD Sensitivity – Human Body Model (HBM)	Class 0A	



Mercury products are electrostatic sensitive. Follow safe handling practices to avoid damage.

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage		+5 V	
Operating Case Temperature	-40 C		+85 C

Thermal Information

Thermal Resistance (channel to backside ground)	84 C/W
Nominal Junction Temperature at +85C Ambient	153 C
Channel Temperature to Maintain 1 Million Hour MTTF	175 C

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Supply Voltage			+5 V	
DC Supply Current	VDD = +5 V	145 mA	163mA	181 mA
Power Dissipated	VDD = +5 V		815 mW	

RF Performance

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
Frequency Range		18 GHz		50 GHz
Gain	f = 18 GHz		15.8 dB	
	f = 34 GHz		17.5 dB	
	f = 50 GHz		15.8 dB	
Return Loss	f = 18 GHz		-9 dB	
	f = 34 GHz		-18 dB	
	f = 50 GHz		-14 dB	
Output IP3	f = 34 GHz		29.5 dBm	
Output P1dB	f = 34 GHz		18.5 dBm	
Noise Figure	f = 34 GHz		3.4 dB	


Notes:


 OIP3 measured with -15dBm input power tones at 10MHz spacing



TYPICAL PERFORMANCE

(VDD = +5V, T = 25 $^{\circ}$ C unless otherwise specified)






Power Saturation at 25C 25 20 10 10 10 10 18 22 26 30 34 38 42 46 50 Frequency (GHz)



TYPICAL APPLICATION

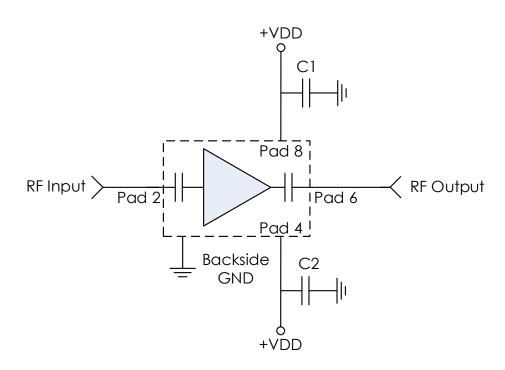

RECOMMENDED COMPONENT LIST (OR EQUIVALENT)

Part	Value	Part Number	Manufacturer
C1, C2	100 pF	SKT01A101Z10A6	Tecdia


Notes:

1. AM1172-D is AC coupled. No external DC blocking capacitors are required.



7

DIE DIMENSIONS

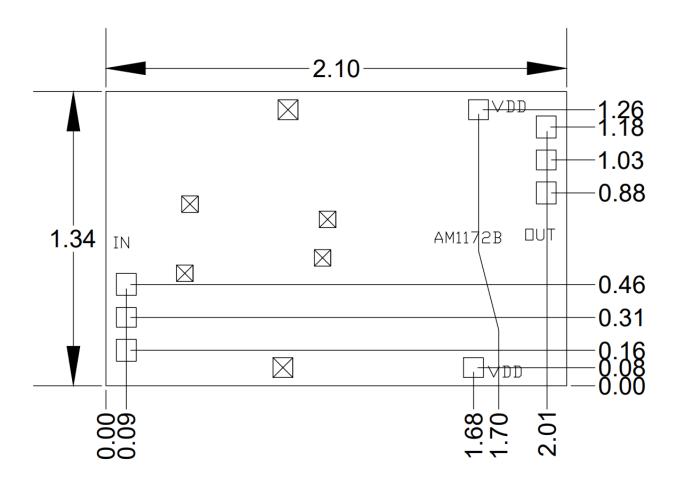


PART ORDERING DETAILS

Description	Part Number
2.10mm x 1.34mm Bare Die	AM1172-D



RECOMMENDED WIRE BONDS

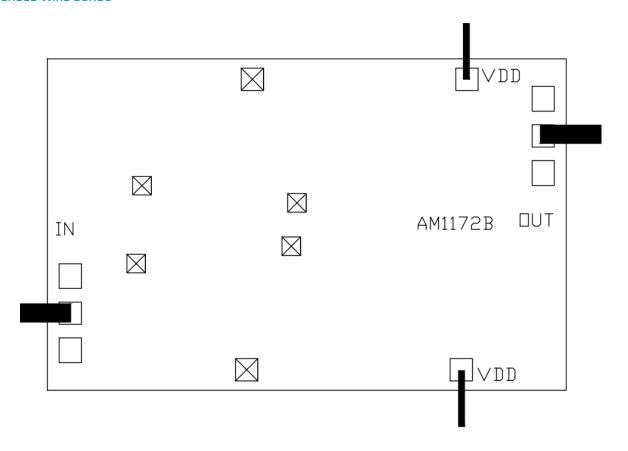

Notes:

- 1. RF input and output pads should use minimum length 3.0 x 0.5 mil ribbon bonds for optimum performance.
- 2. DC bonds should be 1 mil, gold.

RELATED PARTS

Part Number		Manufacturer
AM1144	17 GHz to 40 GHz	Driver Amplifier
AM1162-D	24 GHz to 40 GHz	Low Noise Amplifier
AM1168-D	15 GHz to 40 GHz	Driver Amplifier



COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylheyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.

mercury

Corporate Headquarters

50 Minuteman Road Andover, MA 01810 USA

- +1978.967.1401 tel
- +1866.627.6951 tel
- +1978.256.3599 fax

International Headquarters Mercury International

Avenue Eugène-Lance, 38 PO Box 584

CH-1212 Grand-Lancy 1 Geneva, Switzerland

+41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com For technical details, contact: MMICsupport@mrcy.com









The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.



© 2024 Mercury Systems, Inc. 1-0-2025-10-07-DS-AM1172-D