

AM5007 – Mixer

6 GHz to 27 GHz Double Balanced Mixer


AM5007 is a wideband, double balanced mixer servicing the 6 to 27 GHz frequency range. Suitable for both downconvert and upconvert applications, the device exhibits high IIP3 and low conversion loss. Packaged in a compact 3mm QFN, the AM5007 is perfect for low SWAP applications.

FEATURES

- 6 to 27 GHz RF
- 7 dB Conversion Loss
- DC to 8 GHz IF
- +20 dBm IIP3
- 40 dB Typical LO to RF Isolation
- +13 dBm to +20 dBm LO drive
- 3mm SMT QFN Package
- -40C to +85C Operation




FUNCTIONAL DIAGRAM

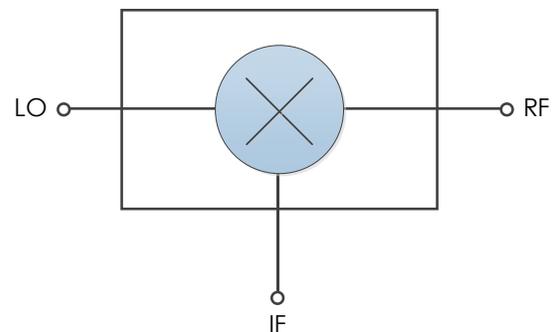


CHARACTERISTIC PERFORMANCE

Typical Conversion Loss

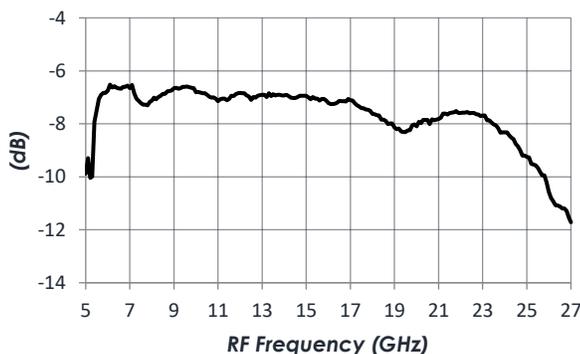

Typical IIP3

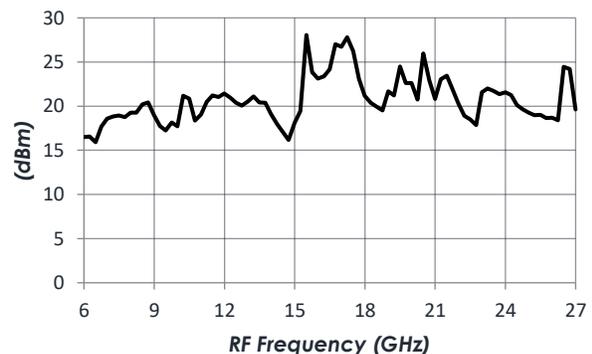

CONTENTS

FEATURES 1

FUNCTIONAL DIAGRAM 1

CHARACTERISTIC PERFORMANCE 1

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS 4

TYPICAL PERFORMANCE 5

TYPICAL APPLICATION 8

RECOMMENDED COMPONENT LIST (OR EQUIVALENT) 8

EVALUATION PC BOARD 9

RELATED PARTS 9


COMPONENT COMPLIANCE INFORMATION 10

REVISION HISTORY

| Date | Revision | Notes |
|-----------|----------|------------------|
| 7/22/2025 | 1 | Initial Release |
| 2/12/2026 | 1.1 | Minor formatting |

PIN LAYOUT AND DEFINITIONS

Note: All Un-Labeled Pins are NC or Ground

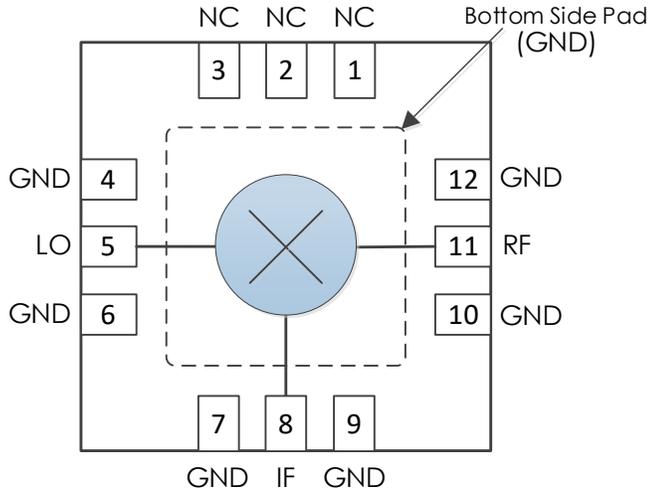

| Pin | Name | Function |
|------|------|--|
| 1-3 | NC | Not Connected |
| 4 | GND | Ground - Common |
| 5 | LO | LO Input - 50 Ohms - AC Coupled |
| 6-7 | GND | Ground - Common |
| 8 | IF | IF Output / Input - 50 Ohms - DC coupled to diodes. External DC blocking capacitor recommended |
| 9-10 | GND | Ground - Common |
| 11 | RF | RF Input / Output - 50 Ohms - AC Coupled |
| 12 | GND | Ground - Common |

Note: Pin 8 does not need a DC blocking capacitor if no voltage is present on the pin.

SPECIFICATIONS

Absolute Maximum Ratings

| | Minimum | Maximum |
|---------------------------|---------|---------|
| RF Input Power | | +24 dBm |
| LO Input Power | | +24 dBm |
| Storage Temperature Range | -55 C | +150 C |

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

| | Minimum | Maximum |
|----------------------------|---------|---------|
| Moisture Sensitivity Level | MSL 3 | |



Mercury products are electrostatic sensitive. Follow safe handling practices to avoid damage.

Recommended Operating Conditions

| | Minimum | Typical | Maximum |
|----------------------------|---------|---------|---------|
| LO Input Power | +13 dBm | | +20 dBm |
| Operating Case Temperature | -40 C | | +85 C |

RF Performance

(T = 25 °C unless otherwise specified)

| Param | Testing Conditions | Min | Typical | Max |
|--------------------|-----------------------------------|--------|---------|--------|
| RF Frequency Range | | 6 GHz | | 27 GHz |
| LO Frequency Range | | 6 GHz | | 27 GHz |
| IF Frequency Range | | DC | | 8 GHz |
| Conversion Loss | IF = 100 MHz | | 7 dB | 12 dB |
| Input IP3 | IF = 2.5 GHz, 10 MHz Tone Spacing | 12 dBm | 20 dBm | |
| LO to RF Isolation | IF 50 Ohm terminated | | 40 dB | |
| LO to IF Isolation | RF 50 Ohm terminated | | 30 dB | |
| RF to IF Isolation | LO 50 Ohm terminated | | 30 dB | |
| Input P1dB | IF = 100 MHz | | +10 dBm | |

Typical MxN Spur Suppression


(IF=100 MHz, -10 dBm RF input, T = 25 °C)

| RF | LO | LO = +13 dBm | LO = +15 dBm | LO = +19 dBm |
|----|----|--------------|--------------|--------------|
| 1 | 1 | -19 dBm | -18 dBm | -17 dBm |
| 1 | 2 | -30 dBc | -31 dBc | -31 dBc |
| 2 | 1 | -44 dBc | -46 dBc | -53 dBc |
| 2 | 2 | -54 dBc | -58 dBc | -67 dBc |
| 2 | 3 | -42 dBc | -45 dBc | -54 dBc |
| 3 | 2 | -66 dBc | -69 dBc | -76 dBc |
| 3 | 3 | -48 dBc | -50 dBc | -58 dBc |
| 1 | 3 | -19 dBc | -18 dBc | -18 dBc |


TYPICAL PERFORMANCE

(T = 25°C, IF = 100 MHz, RF=10 GHz unless otherwise specified)


Conversion Loss vs LO Power

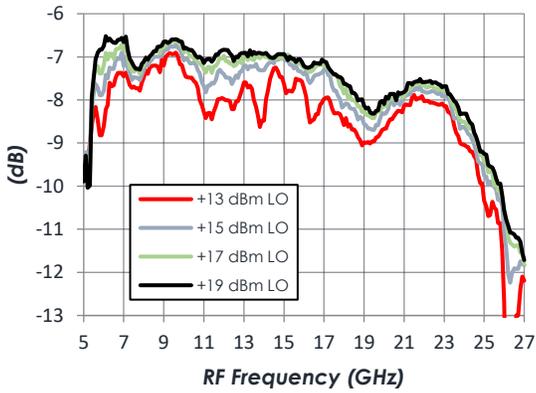


Conversion Loss vs LO Power

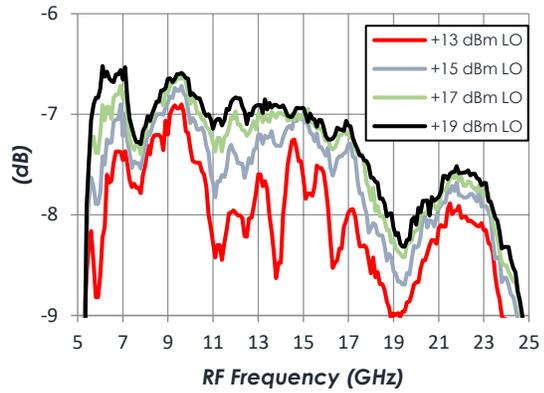


Relative IF Response

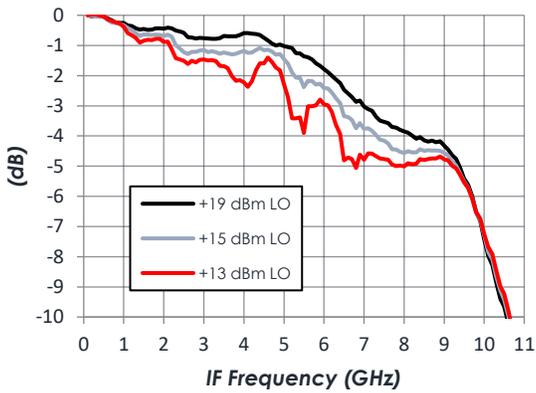


LO to RF Isolation

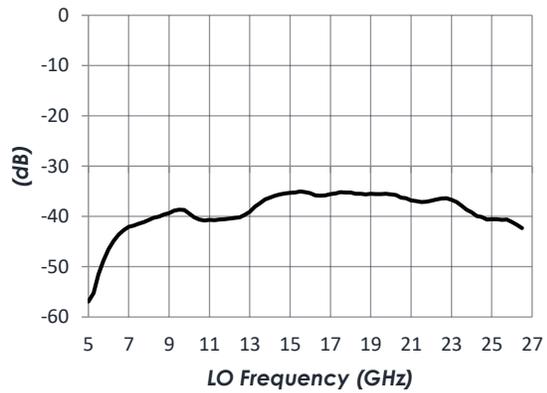

LO to IF Isolation






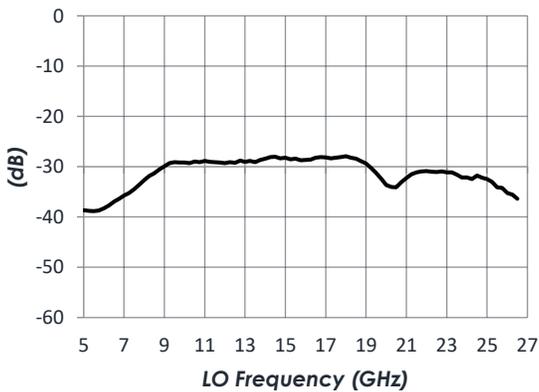


RF to IF Isolation

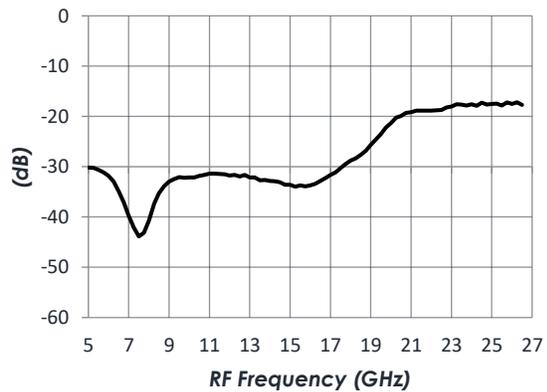

TYPICAL PERFORMANCE (CONTINUED)

(T = 25°C, IF=100 MHz, RF=10 GHz unless otherwise specified)

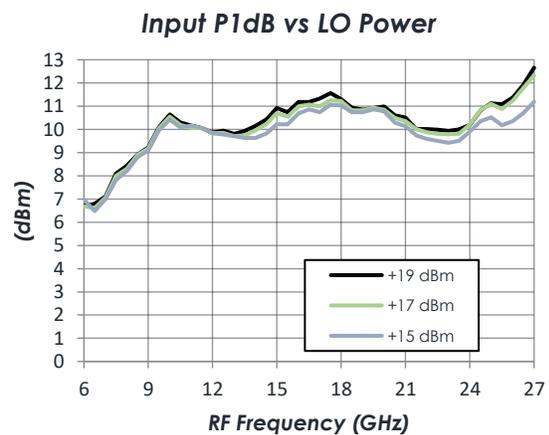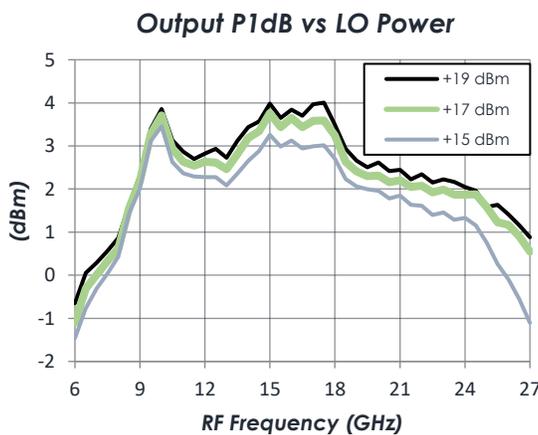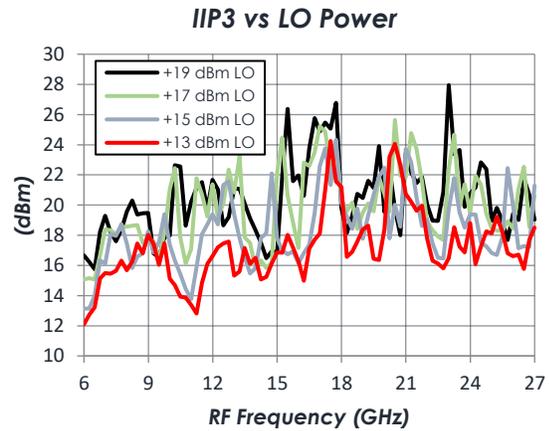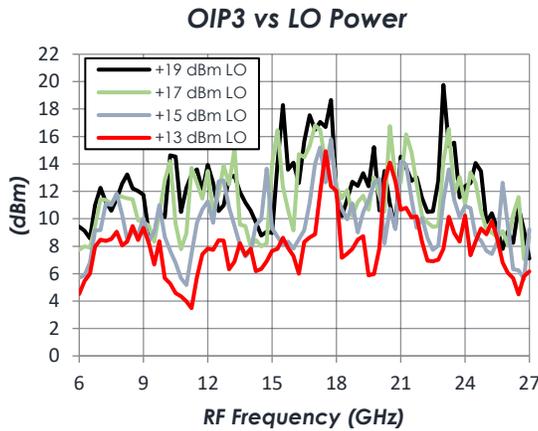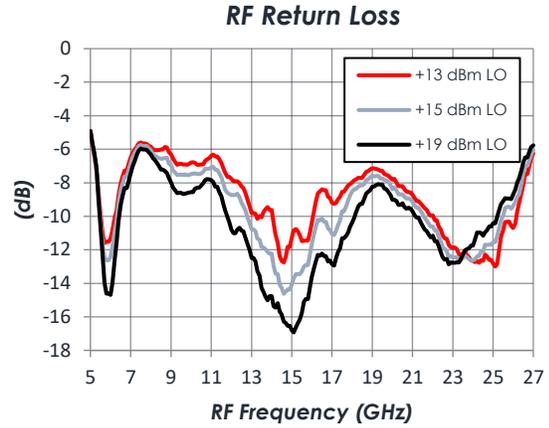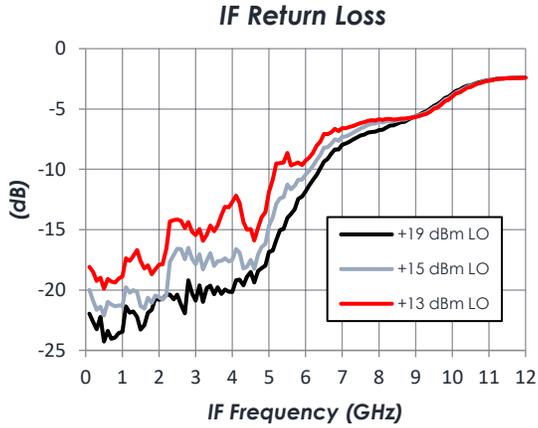


NOTE: IP3 is measured with two input tones spaced 10 MHz apart at IF=2.5 GHz.


TYPICAL PERFORMANCE (CONTINUED)

(T = 25°C, IF=100 MHz, RF=10 GHz unless otherwise specified)


LO Second Harmonic IF Isolation

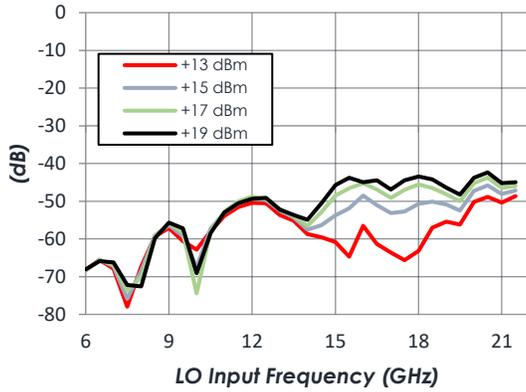


LO Third Harmonic IF Isolation

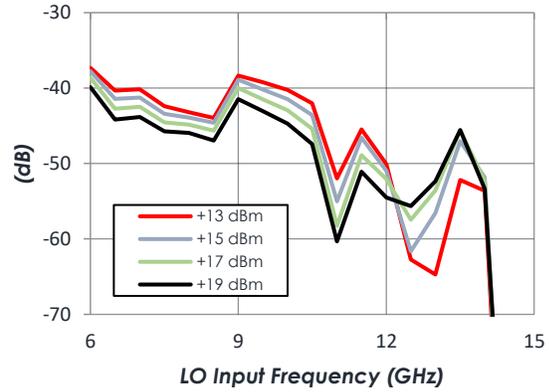


LO Fourth Harmonic IF Isolation

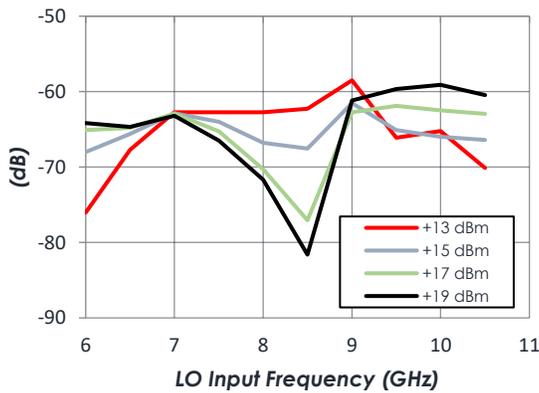

2RF x 2LO Spurious Suppression at IF

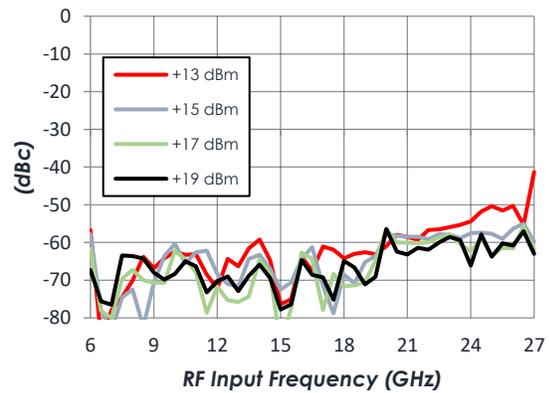


2IF x LO Spurious Suppression at RF

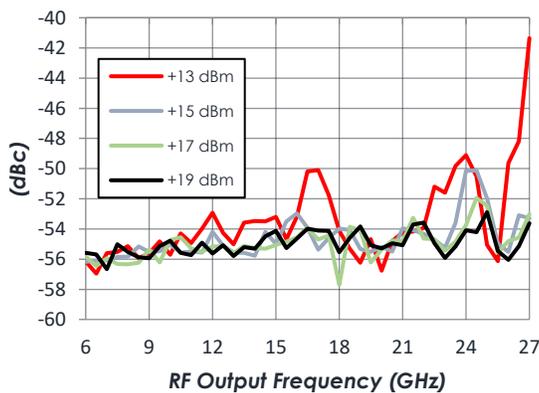

NOTE: Suppression is measured relative to the fundamental IF/RF. Isolation is measured relative to the fundamental LO.

TYPICAL APPLICATION

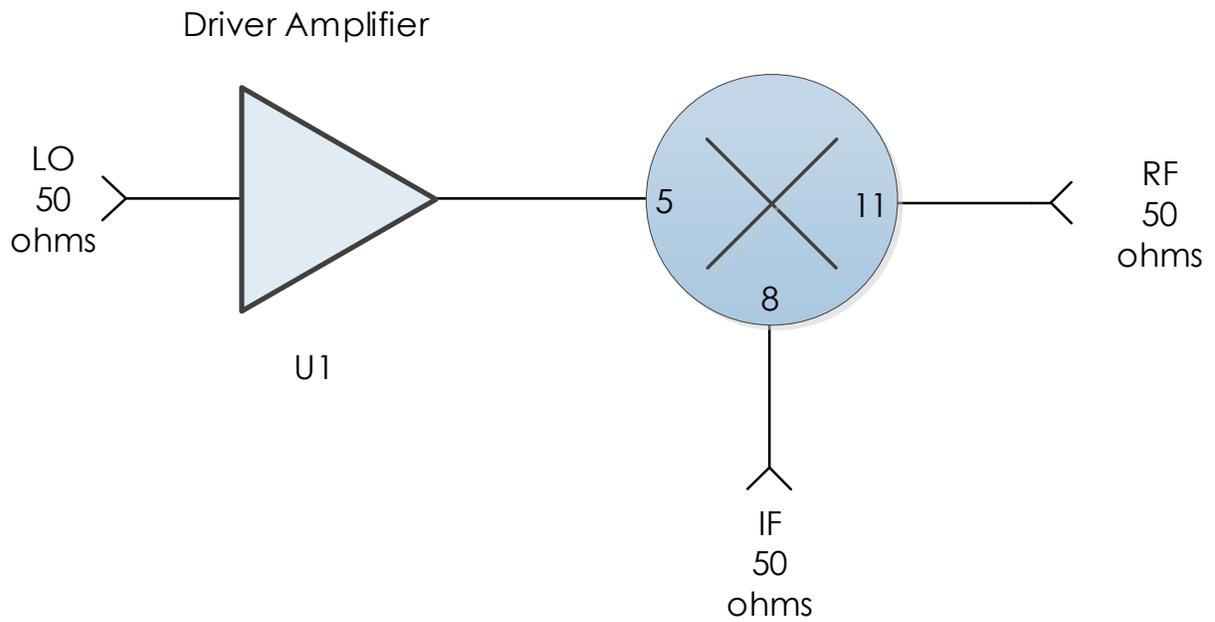


RECOMMENDED COMPONENT LIST (OR EQUIVALENT)

| Part | Value | Part Number | Manufacturer |
|------|-------|-------------|-----------------|
| U1 | Amp | AM1157 | Mercury Systems |

Note:

1. Pin 8 must have an external DC blocking capacitor if an external voltage is present at the pin.

EVALUATION PC BOARD

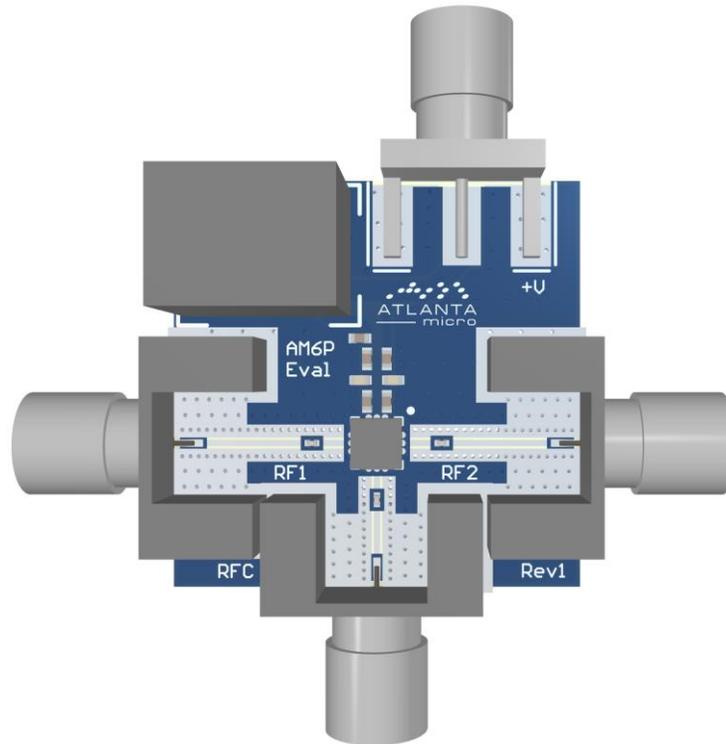

Note: Board will not have all components in drawing installed.

RELATED PARTS

| Part Number | | Description | |
|-------------|-----------------|---------------------------|--|
| AM5008 | 2 GHz to 24 GHz | Double Balanced Mixer | |
| AM1157 | 6 GHz to 27 GHz | Wideband Driver Amplifier | |

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

| Substance List | Allowable Maximum Concentration |
|---------------------------------------|---------------------------------|
| Lead (Pb) | <1000 PPM (0.1% by weight) |
| Mercury (Hg) | <1000 PPM (0.1% by weight) |
| Cadmium (Cd) | <75 PPM (0.0075% by weight) |
| Hexavalent Chromium (CrVI) | <1000 PPM (0.1% by weight) |
| Polybrominated Biphenyls (PBB) | <1000 PPM (0.1% by weight) |
| Polybrominated Diphenyl ethers (PBDE) | <1000 PPM (0.1% by weight) |
| Decabromodiphenyl Deca BDE | <1000 PPM (0.1% by weight) |
| Bis (2-ethylhexyl) Phthalate (DEHP) | <1000 PPM (0.1% by weight) |
| Butyl Benzyl Phthalate (BBP) | <1000 PPM (0.1% by weight) |
| Dibutyl Phthalate (DBP) | <1000 PPM (0.1% by weight) |
| Diisobutyl Phthalate (DIBP) | <1000 PPM (0.1% by weight) |

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury’s supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International
 Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury’s internal processes and methods. The information contained in this document is subject to change at any time without notice.

