


AM6042 – Switch

DC to 20 GHz, SP4T, Absorptive




AM6042 is an absorptive Single-Pole Four-Throw (SP4T) switch covering the DC to 20 GHz frequency range suited for a wide range of wireless applications. The AM6042 provides low insertion loss, flat frequency response, high isolation and linearity, and fast switching speed making this switch ideal for high frequency, low power transmit/receive applications. The AM6042 requires only a single positive supply and two positive control voltages. With internal 50Ω matching, internal decoder circuitry, and low current draw all packaged in a 4mm QFN, the AM6042 represents a compact total PCB footprint with minimal size, weight, and power (low SWaP).

FEATURES


- § 1.8 dB Insertion Loss
- § +38 dBm Input IP3
- § +3.3V to +5.0V Supply
- § +3.3V to +5.0V Control
- § >40 dB Isolation
- § 4mm QFN
- § -40°C to +85°C Operation

FUNCTIONAL DIAGRAM

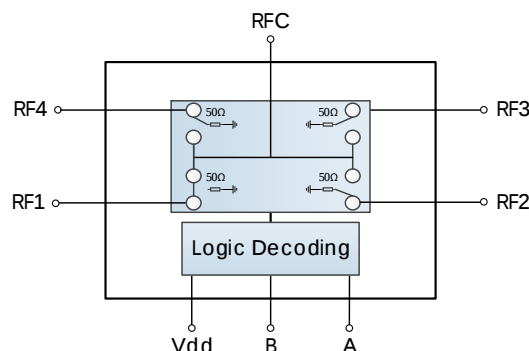


CHARACTERISTIC PERFORMANCE

Frequency Response at +25°C

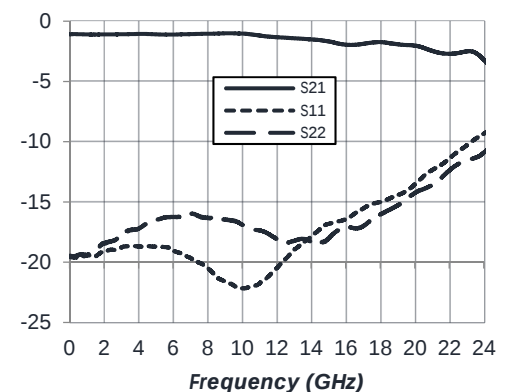

Isolation at +25°C

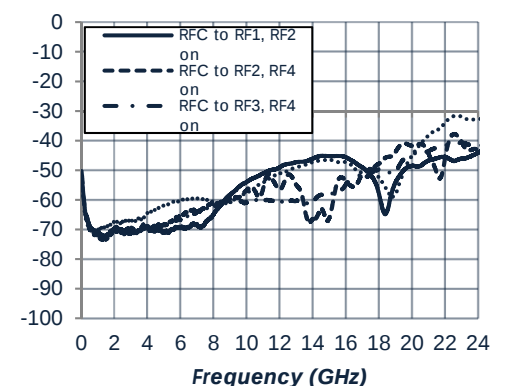



CONTENTS

REVISION HISTORY 2

SPECIFICATIONS..... 4

TYPICAL APPLICATION..... 8

RECOMMENDED COMPONENT LIST (OR EQUIVALENT) 9

EVALUATION PC BOARD.....10


RELATED PARTS.....10

COMPONENT COMPLIANCE INFORMATION..... 11

REVISION HISTORY

January 26, 2022	1	Initial Release.
May 18, 2022	2	Added Switching Speed and Corrected Initial Release Date.
August 16, 2022	3	Fixed Logic Table.
July 19, 2024	4	Changed to Mercury branding. No content changes.

PIN LAYOUT AND DEFINITIONS

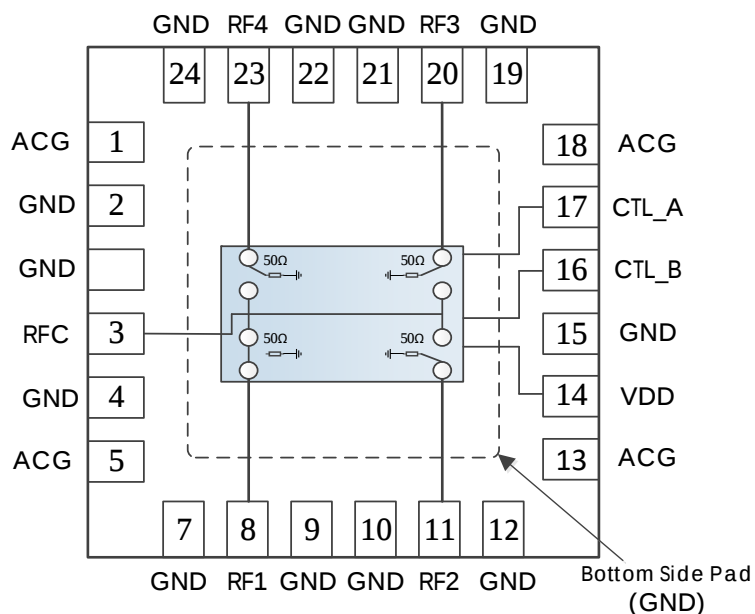

Pin	Name	Function
1	ACG	Optional AC Ground **
2,3	GND	Ground – Common
4	RFC	RF Input – 50 Ohms – DC Coupled. External DC blocking capacitor required*
5	GND	Ground - Common
6	ACG	Optional AC Ground **
7	GND	Ground – Common
8	RF1	RF Output – 50 Ohms – DC Coupled. External DC blocking capacitor required*
9, 10	GND	Ground - Common
11	RF2	RF Output – 50 Ohms – DC Coupled. External DC blocking capacitor required*
12	GND	Ground - Common
13	ACG	Optional AC Ground **
14	VDD	DC Power Input
15	GND	Ground - Common
16	CTL_B	Switch Control B
17	CTL_A	Switch Control A
18	ACG	Optional AC Ground **
19	GND	Ground - Common
20	RF3	RF Output – 50 Ohms – DC Coupled. External DC blocking capacitor required*
21, 22	GND	Ground - Common
23	RF4	RF Output – 50 Ohms – DC Coupled. External DC blocking capacitor required*
24	GND	Ground - Common

Notes:

* DC Blocking caps not required if in series with other Mercury parts of the same reference voltage

** AC Ground caps optional. Installing AC ground capacitors offer optimum absorptive performance below 400 MHz See Typical Performance section for more details

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+6.0 V
RF Input Power		+27 dBm
Storage Temperature Range	-55 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
Moisture Sensitivity Level	MSL 3	



Mercury products are electrostatic sensitive.
Follow safe handling practices to avoid damage.

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+2.5 V	+5.0 V	
Operating Case Temperature	-40 C		+85 C

Timing Characteristics

Parameter	Minimum	Typical	Maximum
Switching Speed (Path Enabled to Disabled)		15 ns	
Switching Speed (Path Disabled to Enabled)		15 ns	

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max.
DC Supply Voltage		+2.7 V	+5.0 V	
DC Supply Current	VDD = +3.3 V		5 mA	
	VDD = +5.0 V		5 mA	
Power Dissipated	VDD = +3.3 V		16.5 mW	
	VDD = +5.0 V		25 mW	
Logic Level Low		0.0 V		+0.5 V
Logic Level High		+2.0 V		+VDD

State Table

CTL A	CTL B	State
Low	Low	RFC to RF1
Low	High	RFC to RF3
High	Low	RFC to RF2
High	High	RFC to RF4

RF Performance


(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max.
Frequency Range		DC		20 GHz
Insertion Loss	f = 0.01 GHz		1 dB	
	f = 10 GHz		15 dB	
	f = 20 GHz		2.5 dB	
Return Loss	f = 0.01 GHz		20 dB	
	f = 10 GHz		20 dB	
	f = 20 GHz		17 dB	
Input IP3	VDD = +5.0 V		+38 dBm	
Isolation	VDD = +5.0 V		+45 dBm	


TYPICAL PERFORMANCE

(VDD = +5.0 V, T = 25 °C. Data measured via probes outside IC package on 10 mil Rogers RO4350B™)


Insertion Loss at +25C

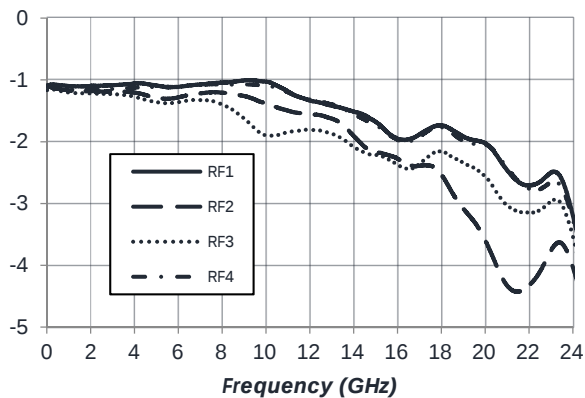


P1dB at +25C

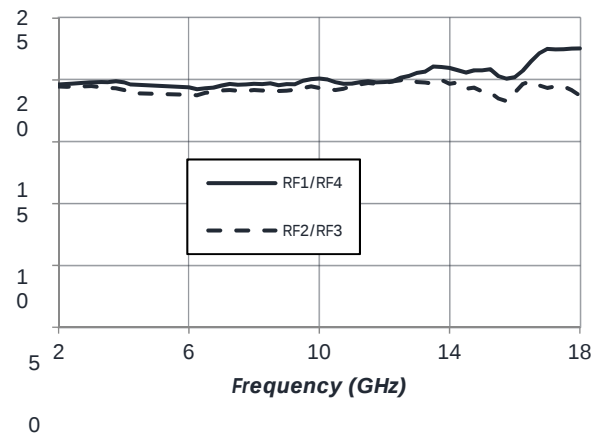


IIP3 at +25C

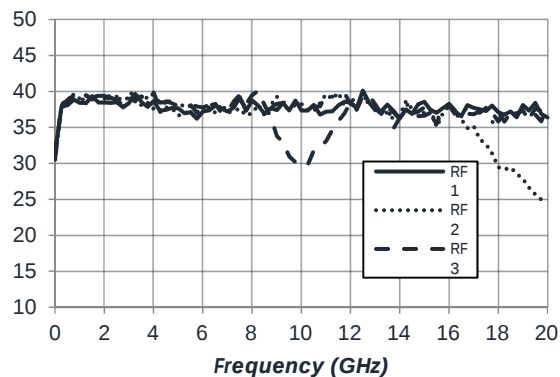


RF1 Insertion Loss vs Temperature

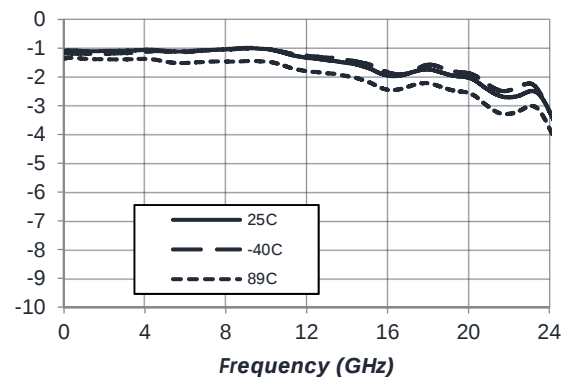

RF3 Insertion Loss vs Temperature

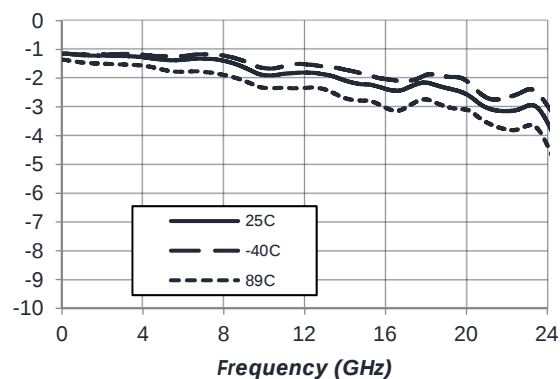


RF1 Return Loss

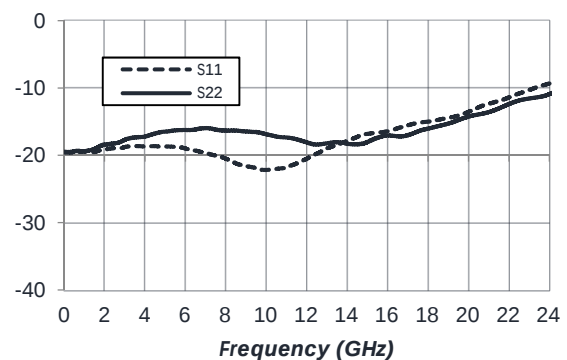


TYPICAL PERFORMANCE (continued)

(VDD = +5.0 V, T = 25 °C. Data measured via probes outside IC package on 10 mil Rogers RO4350B™)


RF1 Isolation at +25C

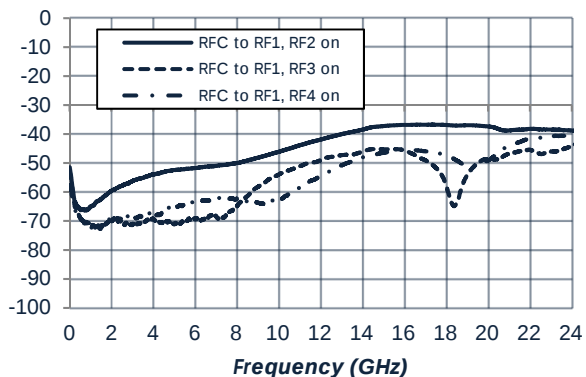


RF2 Isolation at +25C

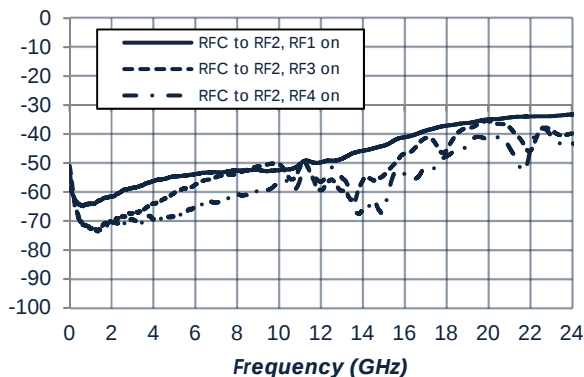


RF3 Isolation at +25C

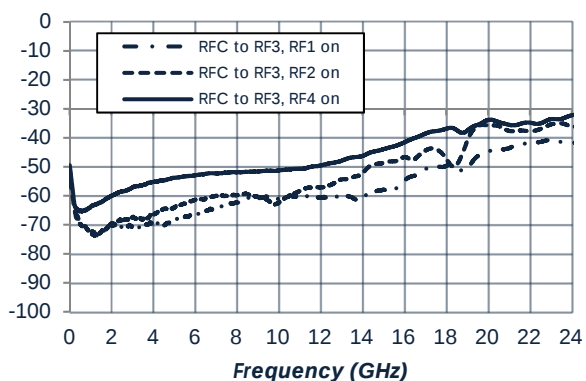


RF4 Isolation at +25C

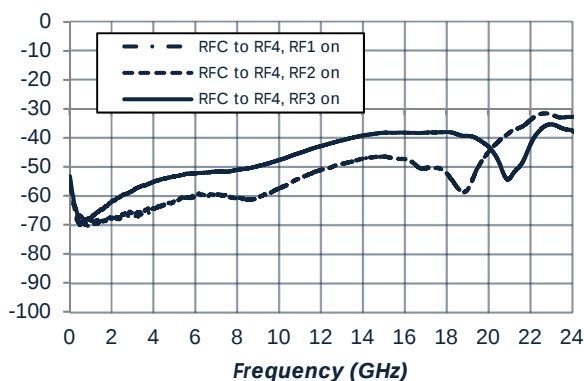

Switching Speed - Rising Edge



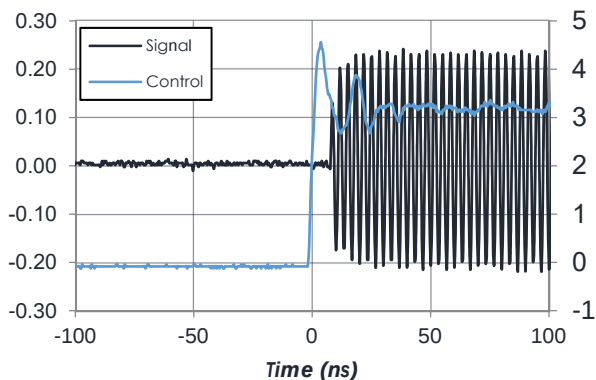


Switching Speed - Falling Edge

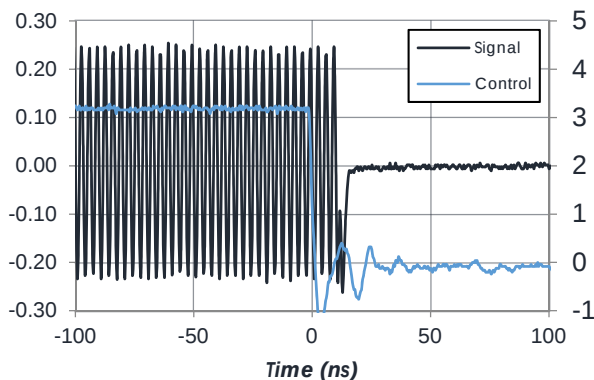


TYPICAL PERFORMANCE (CONTINUED)

(VDD = +5.0 V, T = 25 °C. Data measured via probes outside IC package on 10 mil Rogers RO4350B™)

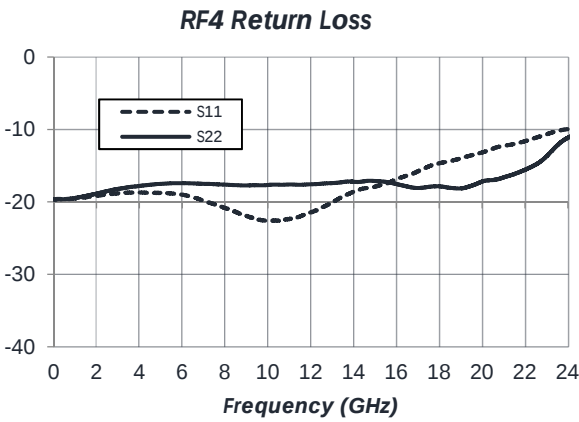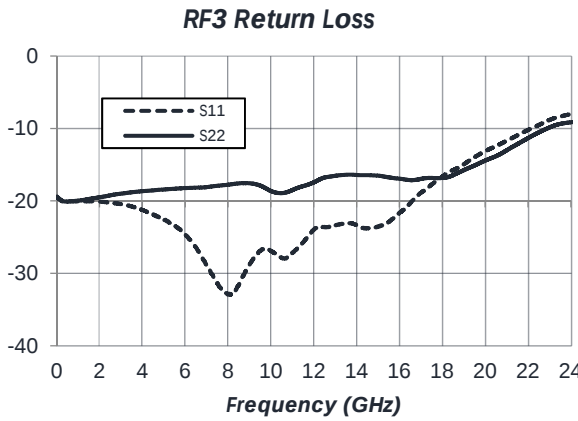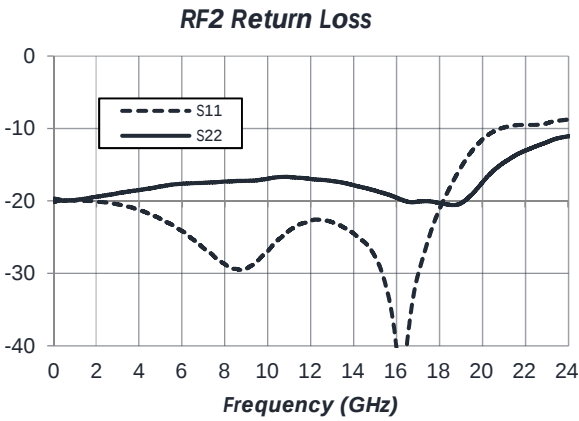

TYPICAL APPLICATION

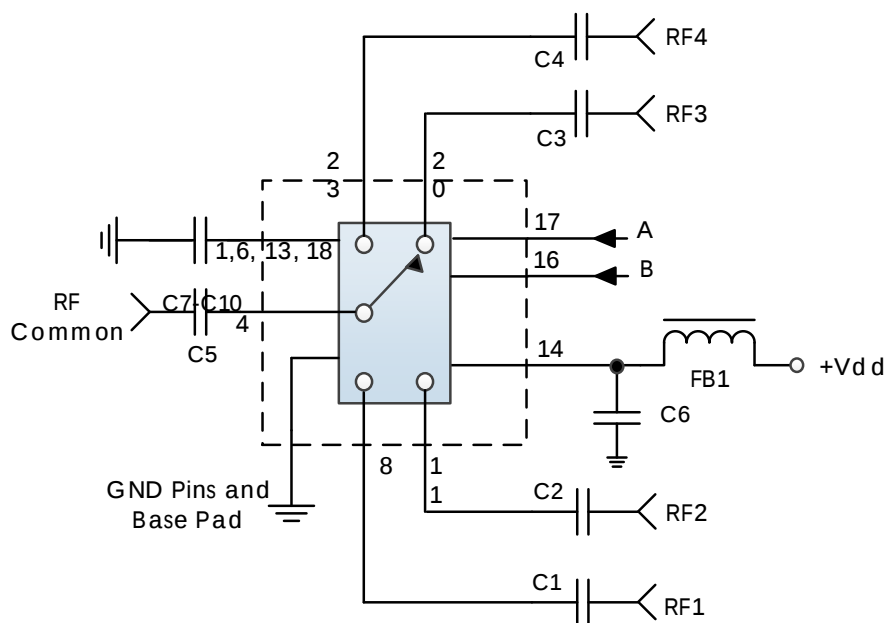


RECOMMENDED COMPONENT LIST (OR EQUIVALENT)

Part	Value	Part Number	Manufacturer
C1-C5	0.1 μ F	0201BB104KW160	Passives Plus
C6-C10	0.1 μ F	C1005X7R1H104K050BB	TDK
FB1	-	MMZ1005A222E	TDK

Notes:

- DC blocking capacitors should be high performance, low-loss, broadband capacitors for optimal performance.
- RC Filtering on the control line is recommended to prevent digital noise from coupling to the RF path.
 - Select control line RC filter values based on desired logic source decoupling and switching speed.
- Installing capacitors C7-C10 is recommended for absorptive performance below 400 MHz.

EVALUATION PC BOARD

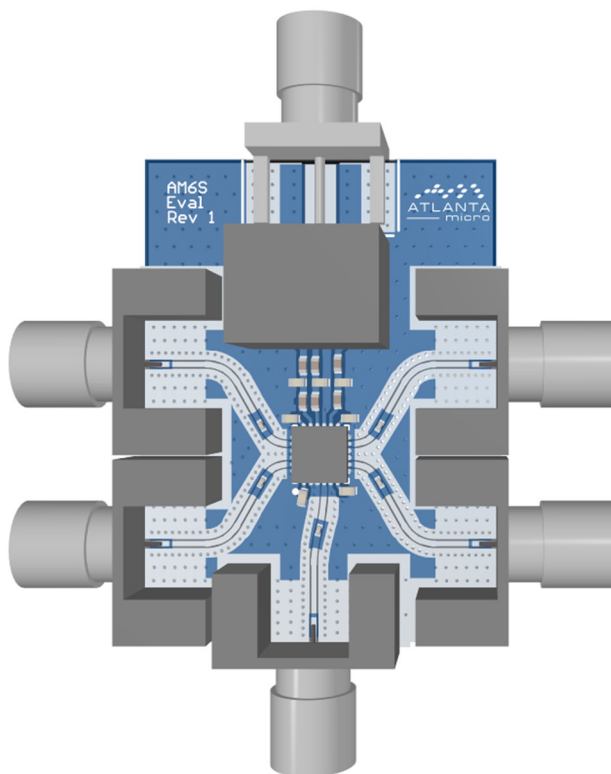

RELATED PARTS

Part Number		Description
AM6012	DC to 18 GHz	SPDT, Reflective
AM6013	DC to 18 GHz	SP4T, Reflective
AM6015	DC to 18 GHz	SP6T, Reflective
AM6016	DC to 26.5 GHz	SPDT, Reflective
AM6017	DC to 26.5 GHz	SP4T, Reflective
AM6029	DC to 18 GHz	SP4T, Reflective
AM6031	DC to 20 GHz	SPDT, Absorptive

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH). Conflict Materials: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1978.967.1401tel
+1866.627.6951tel
+1978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+4122 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

