


AM1018A – Amplifier

20 MHz to 6 GHz Gain Block

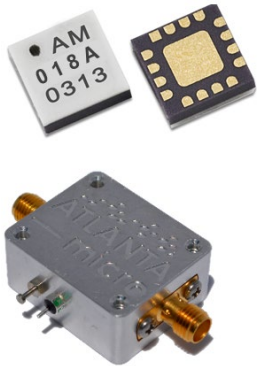


AM1018A is a high dynamic range cascadable gain block covering the 20 MHz to 6 GHz frequency range. It operates from a +3.3 VDC supply and exhibits a flat frequency response and high third order intercept performance while also providing excellent gain stability over the operating temperature range. With internal 50Ω matching and packaged in a 3mm QFN or a shielded module, the AM1018A represents a compact total PCB footprint.



FEATURES

- 13 dB Gain
- 3.0 dB Noise Figure
- +35 dBm OIP3
- +19 dBm P1dB
- +3.3V, 85 mA
- 3mm QFN Package
- -40C to +85C Operation
- Unconditionally Stable

FUNCTIONAL DIAGRAM

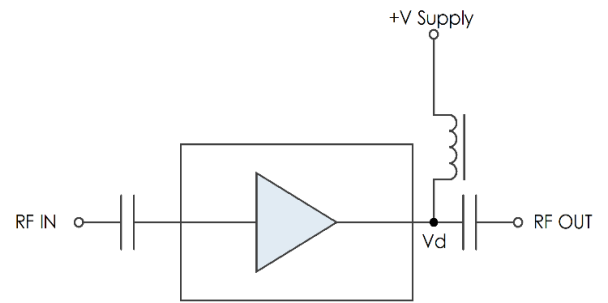

CHARACTERISTIC PERFORMANCE

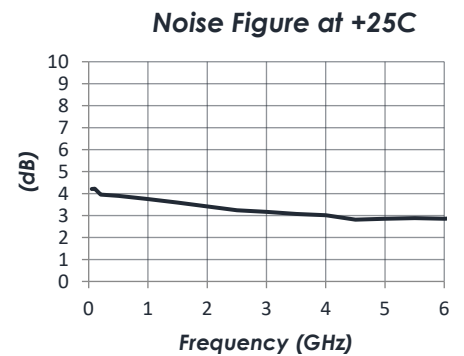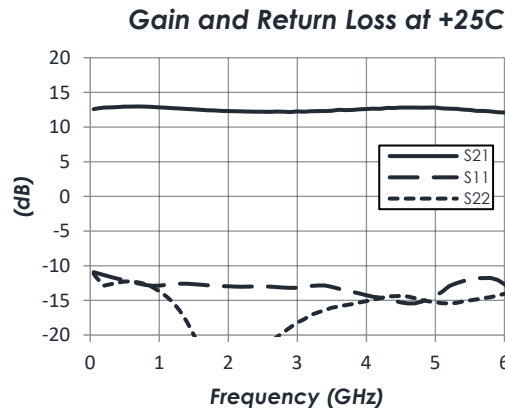

CONTENTS

FEATURES 1

FUNCTIONAL DIAGRAM 1

CHARACTERISTIC PERFORMANCE 1

REVISION HISTORY 2

PIN LAYOUT AND DEFINITIONS 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE 6

TYPICAL APPLICATION..... 8

EVALUATION PC BOARD..... 9

PART ORDERING DETAILS 9

RELATED PARTS..... 9


COMPONENT COMPLIANCE INFORMATION 10

REVISION HISTORY

| Date | Revision | Notes |
|-------------------|----------|---|
| April 14, 2017 | A | Initial Release |
| May 15, 2017 | A1 | Pinout Updated. Various Notes Added. |
| June 8, 2017 | A2 | Specifications Updated. |
| December 12, 2018 | A3 | Input Power Spec Updated. |
| August 2, 2019 | 4 | Updated to Latest Datasheet Format. Min/Typ/Max Current Values Changed. RF-Shielded Module Information Added. |
| November 26, 2019 | 4A | Updated Description to include shielded module packaging |
| May 15, 2020 | 5 | Package and module information moved to main product page |
| November 7, 2024 | 6 | Changed to Mercury branding. No content changes. |

PIN LAYOUT AND DEFINITIONS

NOTE: All Non-Named Pins Are NC or GND

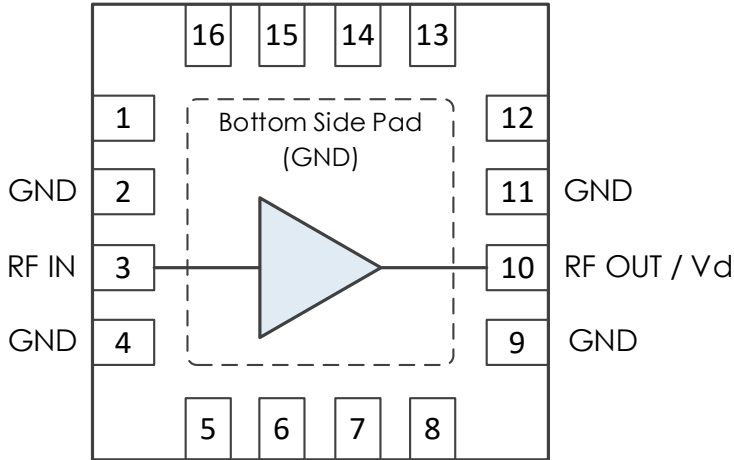

| Pin | Name | Function |
|------------|-----------|---|
| 1 | NC | Not Connected * |
| 2 | GND | Ground - Common |
| 3 | RF IN | RF Input - 50 ohms - DC Coupled, External DC Block Required |
| 4 | GND | Ground - Common |
| 5-8 | NC | Not Connected * |
| 9 | GND | Ground - Common |
| 10 | RF OUT/Vd | RF Output and DC Power Input - 50 ohms - DC Coupled, External DC Block Required |
| 11 | GND | Ground - Common |
| 12-16 | NC | Not Connected * |
| Bottom Pad | GND | Ground - Common |

* NC pins may be grounded or left open.

SPECIFICATIONS

Absolute Maximum Ratings

| | Minimum | Maximum |
|--------------------------------|---------|---------|
| Device Voltage | 0.0 V | +4.0 V |
| RF Input Power | | +20 dBm |
| Operating Junction Temperature | -40 C | +150 C |
| Storage Temperature Range | -50C | +150 C |

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

| | Minimum | Maximum |
|---|---------|---------|
| Storage Temperature Range (Recommended) | -50 C | +125 C |
| Moisture Sensitivity Level | MSL 3 | |



Mercury products are electrostatic sensitive. Follow safe handling practices to avoid damage.

Recommended Operating Conditions

| | Minimum | Typical | Maximum |
|--------------------------------|---------|---------|---------|
| Supply Voltage | +3.0 V | +3.3 V | +3.8 V |
| Device Voltage, Vd | +2.7 V | +3.0 V | +3.8 V |
| Operating Case Temperature | -40 C | +25 C | +85 C |
| Operating Junction Temperature | -40 C | | +125 C |

Thermal Information

| Thermal Resistance (°C / W) | |
|---|-------|
| Junction to Case Thermal Resistance (θ_{JC}) | 76.33 |

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

| Param | Testing Conditions | Min | Typical | Max |
|--------------------|--------------------|--------|---------|--------|
| Device Voltage, Vd | Vsupply = +3.3 V | +2.7 V | +3.0 V | +3.5 V |
| DC Supply Current | Vsupply = +3.3 V | 77 mA | 85 mA | 100 mA |
| Power Dissipated | Vsupply = +3.3 V | 0.25 W | 0.28 W | 0.33 W |

RF Performance


(T = 25 °C unless otherwise specified)

| Param | Testing Conditions | Min | Typical | Max |
|-----------------|--------------------|--------|---------|-------|
| Frequency Range | | 20 MHz | | 6 GHz |
| Gain | f = 3 GHz | | 13 dB | |
| Output IP3 | f = 3 GHz | | +35 dBm | |
| Output P1dB | f = 3 GHz | | +19 dBm | |
| Noise Figure | f = 3 GHz | | 3.0 dB | |


TYPICAL PERFORMANCE

(VD = +3.0 V, ID = 85 mA)


Gain vs Temperature

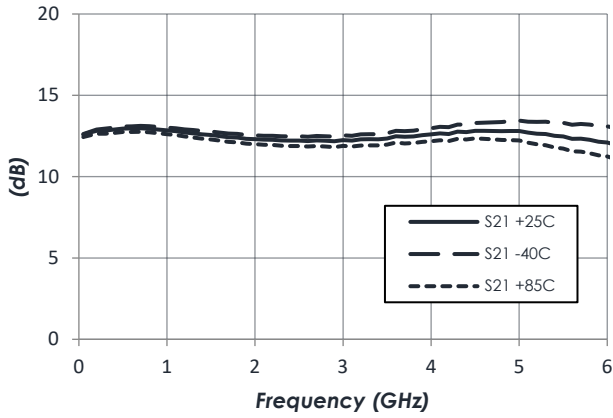


Noise Figure vs Temperature

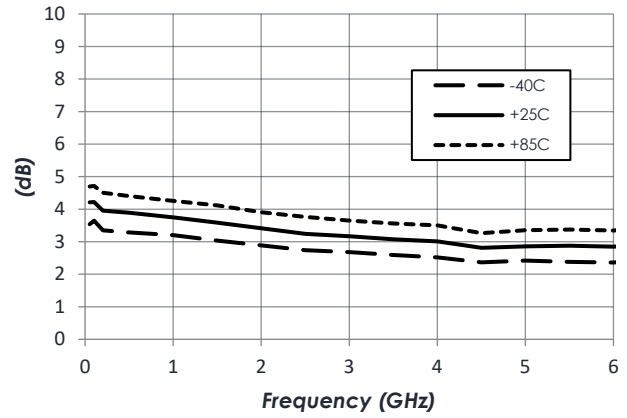


Output IP3 vs Temperature

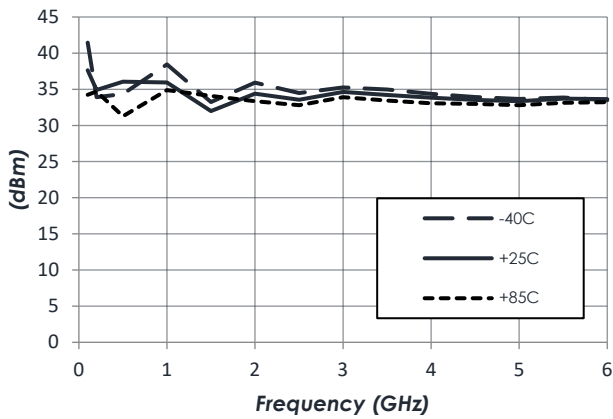

P1dB vs Temperature

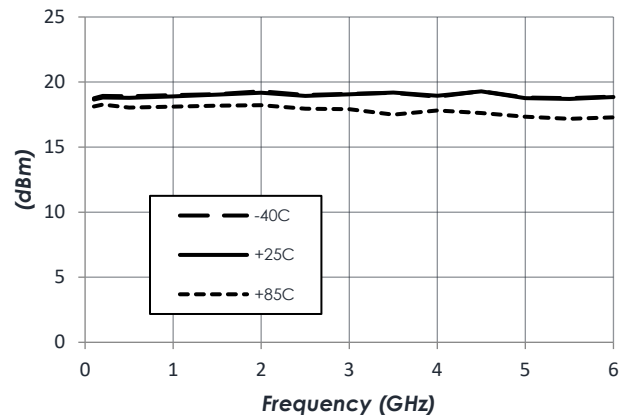


Reverse Isolation vs Temperature

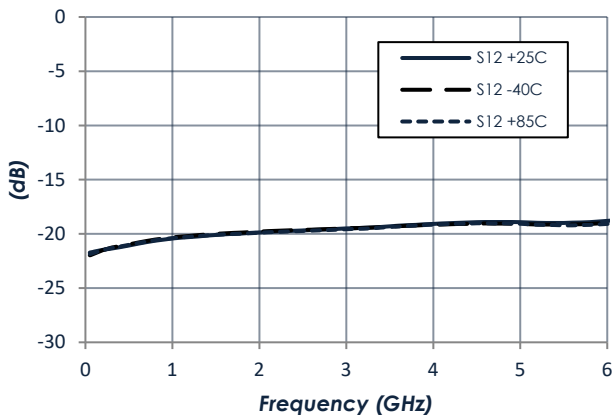


TYPICAL PERFORMANCE (CONTINUED)

(VD = +3.3 V, ID = 85 mA)


Power Saturation at +25C

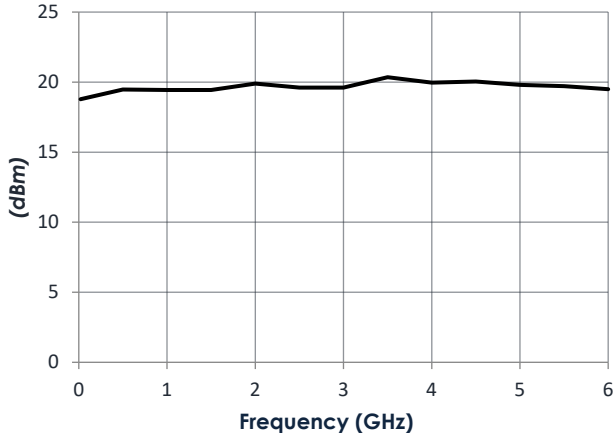


Pin vs. Pout at +25C

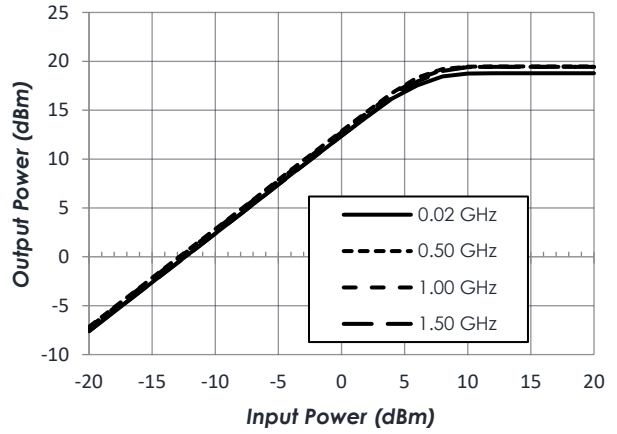


Pin vs. Pout at +25C

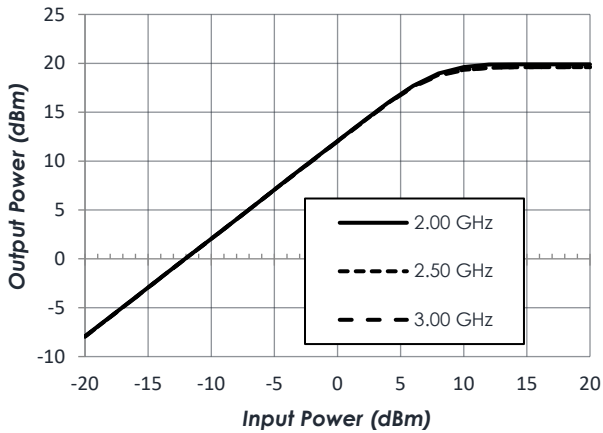


Pin vs. Pout at +25C

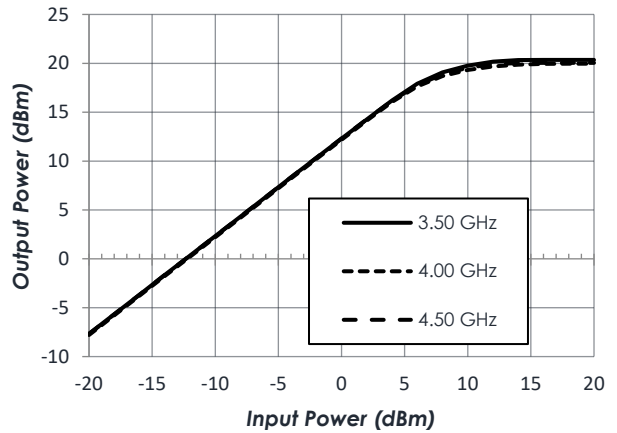

Pin vs. Pout at +25C

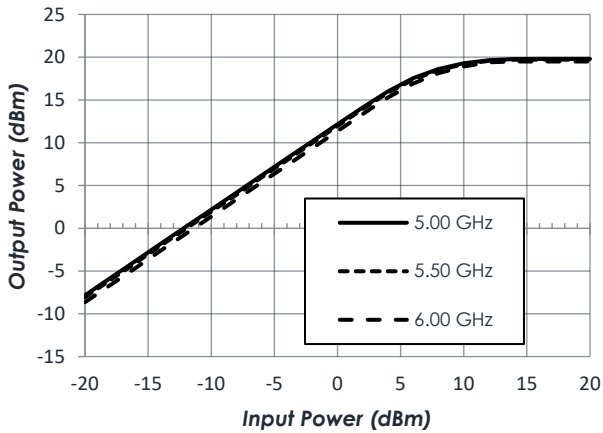

TYPICAL APPLICATION

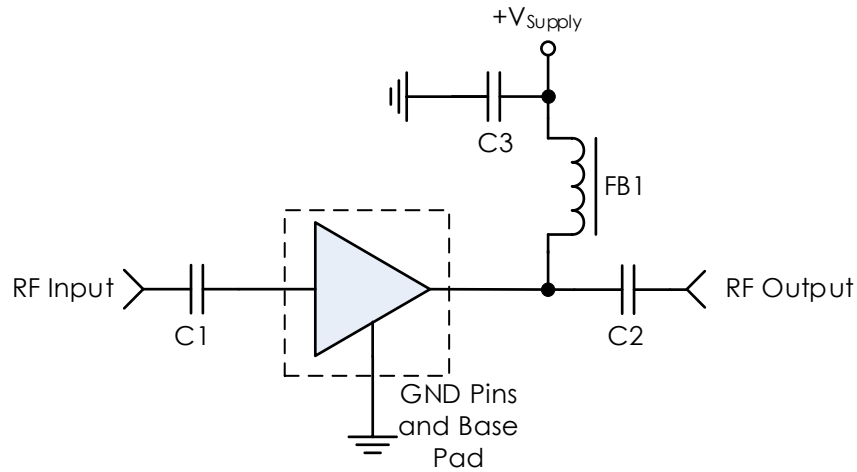


Recommended Component List (or Equivalent)

| Part | Value | Part Number | Manufacturer |
|-----------|-------------|-------------------|---------------|
| C1, C2 | 0.1 μ F | 0402BB104KW160 | Passives Plus |
| C3 - C5 | 0.1 μ F | GRM155R71C104KA88 | Murata |
| FB1 - FB3 | - | MMZ1005A222E | TDK |

Notes:

1. NC pins may be grounded or left open.
2. DC blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.

EVALUATION PC BOARD

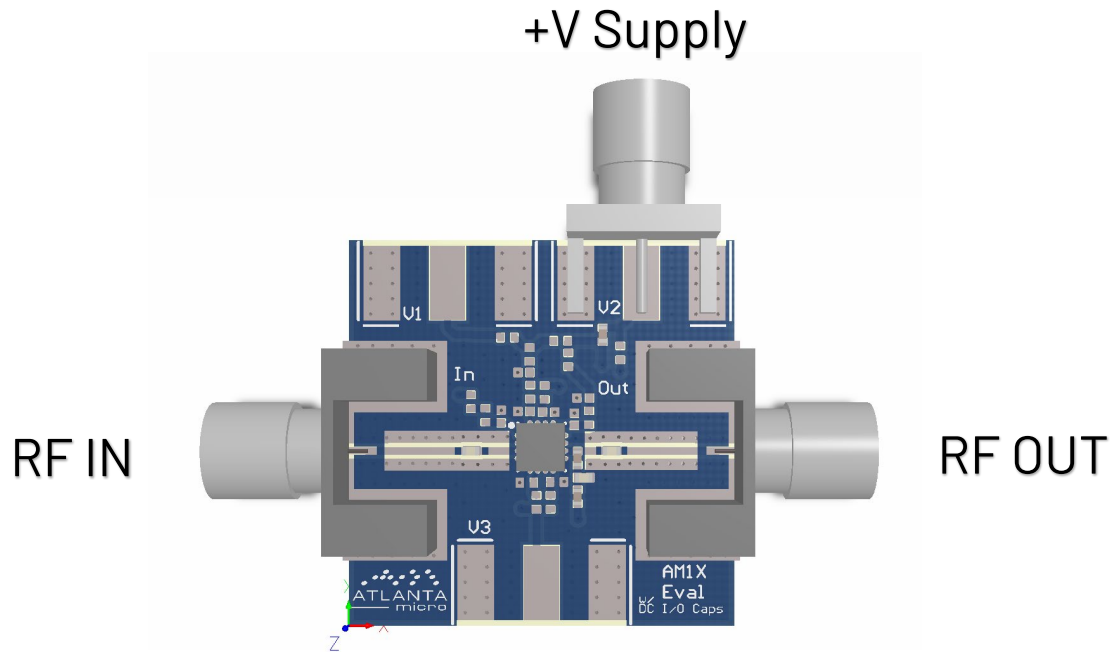

PART ORDERING DETAILS

| Part Number | Description |
|--------------|--|
| AM1018A | 3mm 16 Lead QFN |
| AM1018A Eval | AM1018A Evaluation Board |
| AM1018A-M | AM1018A in 0.95" x 1.13" x 0.6" RF-Shielded Module with Integrated Bias Tee and Field Replaceable SMA Connectors |

RELATED PARTS

| Part Number | Description | |
|-------------|-----------------|------------------------------|
| AM1016B | 20 MHz to 6 GHz | +3.3V Gain Block |
| AM1018B | 20 MHz to 6 GHz | +5.0V Gain Block |
| AM1018C | 20 MHz to 6 GHz | +5.0V Gain Block |
| AM1025B | 20 MHz to 3 GHz | +8.0V Gain Block (High P1dB) |
| AM1031C | 20 MHz to 8 GHz | +3.3V Gain Block |
| AM1063-1 | DC to 10 GHz | Gain Block |
| AM1064-1 | DC to 8 GHz | Gain Block |
| AM1085 | DC to 6 GHz | +5.0V Gain Block |
| AM1090 | DC to 6 GHz | +5.0V or +8.0V Gain Block |

COMPONENT COMPLIANCE INFORMATION

RoHS: Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

| Substance List | Allowable Maximum Concentration |
|---------------------------------------|---------------------------------|
| Lead (Pb) | <1000 PPM (0.1% by weight) |
| Mercury (Hg) | <1000 PPM (0.1% by weight) |
| Cadmium (Cd) | <75 PPM (0.0075% by weight) |
| Hexavalent Chromium (CrVI) | <1000 PPM (0.1% by weight) |
| Polybrominated Biphenyls (PBB) | <1000 PPM (0.1% by weight) |
| Polybrominated Diphenyl ethers (PBDE) | <1000 PPM (0.1% by weight) |
| Decabromodiphenyl Deca BDE | <1000 PPM (0.1% by weight) |
| Bis (2-ethylhexyl) Phthalate (DEHP) | <1000 PPM (0.1% by weight) |
| Butyl Benzyl Phthalate (BBP) | <1000 PPM (0.1% by weight) |
| Dibutyl Phthalate (DBP) | <1000 PPM (0.1% by weight) |
| Diisobutyl Phthalate (DIBP) | <1000 PPM (0.1% by weight) |

REACH: Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

CONFLICT MATERIALS: Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury’s supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
 +1 978.967.1401 tel
 +1 866.627.6951 tel
 +1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
 +41 22 884 5100 tel

Learn more

Visit: mrcy.com

For pricing details, contact: MMICsales@mrcy.com

For technical details, contact: MMICsupport@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury’s internal processes and methods. The information contained in this document is subject to change at any time without notice.

