

Talon RTR 2757

100 Gigabit Ethernet rugged rackmount recorder

Captures data from
Quartz® RFSoc products'
100 Gigabit Ethernet ports

- Real-time record rates up to 25 GB/s (200 Gigabits/s)
- Front-panel removable solid state storage up to 244 TB
- Records up to 8 A/D channels; optional playback capability available
- SystemFlow software GUI with Signal Viewer analysis tool



The Talon RTR 2757 is a turnkey system for recording 100 Gigabit Ethernet UDP streams from Mercury's Direct RF and Quartz® RFSoc products. Mercury's Quartz products provide 100 Gigabit Ethernet interfaces to stream data from up to eight high-speed A/D converters. The 2757 is designed to capture digitized data from up to eight of these streams in real time at the full 100 Gigabit per second rate. With up to 244 TB of removable solid state storage, the 2757 provides hours of multi-channel wideband signal recording.

Mercury's Quartz RFSoc products provide two 100 Gigabit Ethernet interfaces via MPO optical connections. The Quartz FPGA IP routes four A/D channels to each optical interface. The RTR 2757 provides up to two 100 Gigabit Ethernet interfaces, allowing the user to capture digitized signals from up to eight RFSoc A/Ds.

The RTR 2757 provides an interface that matches the Quartz Ethernet UDP protocol and, can accept up to eight independent UDP data streams. This allows users to stream eight A/D channels independently over 100 Gigabit Ethernet and capture them as independent files on the recorder. The standard RTR 2757 captures only the payload, providing data files similar to other Talon recorders. As an option, low-level Ethernet packet capture can be provided, recording the entire Ethernet packet header along with the payload. This allows the suite of SystemFlow software tools to be used for signal analysis prior to, during, and after a recording session.

The RTR 2757 also offers optional playback of recorded Ethernet data. The recording's timing can be coarsely reproduced at playback, where the timestamps of the recording buffers are stored and used to gate the Ethernet playback timing. This capability can prove useful when streaming data to a D/A that has sufficient buffering, to reproduce digitized signals recorded to disk. The recorder includes a Windows NTP client to allow the system time to lock to an NTP server.

Optional AES-256 bit encryption is provided via the RAID's controller-based encryption and Self-Encrypting Drives (SEDs). The SEDs encrypt data through disk-based encryption with a Media Encryption Key (MEK). The MEK is known only to the SEDs and cannot be recovered through forensic analysis. The RAID controller is responsible for managing and delivering the credentials required by the SEDs for enabling the disk-based encryption. The RAID's NVME drives are compliant to the Opal 2.0 industry standard.

FEATURES

- Designed for data capture from Mercury [Direct RF](#) and [Quartz® RFSoc](#) products' 100 Gigabit Ethernet ports
- Single QSFP28 port with MPO transceiver
- Real-time record rates up to 25 GB/s (200 Gigabits/s)
- Front-panel removable solid state storage up to 244 TB
- Intel Xeon® processors with up to 4 TB of DDR4 SDRAM
- 4U 19-inch industrial grade server chassis
- Supports up to eight independent UDP streams
- SystemFlow software GUI with Signal Viewer analysis tool
- C-callable API for integration
- Optional playback capability available
- Optional AES-256 bit encryption (Opal 2.0)

RUGGED AND FLEXIBLE ARCHITECTURE


The RTR 2757 comes in an industrial-grade 19-inch 4U rack-mountable chassis. It uses high-performance NVME U.2 drives in a RAID 0 configuration to provide extremely high-speed real-time recording. Drives are front-panel removable via eight individual drive trays. The independent operating system drive is also removable via the front panel. Multiple 2757 systems can be combined to provide a scalable high-channel-count system. SystemFlow software provides the ability to control multiple systems from a single user interface. This architecture provides scalable storage as channel counts increase.

The RTR 2757 includes options for 40 or 100 Gigabit Ethernet. The system is built using an Intel Xeon server-class motherboard, includes Xeon processors, and includes up to 4 TB of DDR4 RAM. The standard configuration includes USB 3.0 ports, Gigabit Ethernet for network communication, and a video port for display (such as HDMI, DisplayPort, or DVI).

The RTR 2757 can receive up to eight UDP streams (eight independent UDP socket IDs). The standard RTR 2757 can receive four UDP streams, but with product option -002, the RTR 2757 can receive eight streams via two 100 Gigabit Ethernet ports. Each stream is sent to disk via a dedicated DMA channel. Each UDP stream is written to its own file in the standard Mercury data format on the NTFS file system.


The RTR 2757 provides channelized file recording of the UDP payload. The payload can include VITA49 packet headers if they are enabled on the Mercury Direct RF or Quartz RFSoc product.

2757 BLOCK DIAGRAM

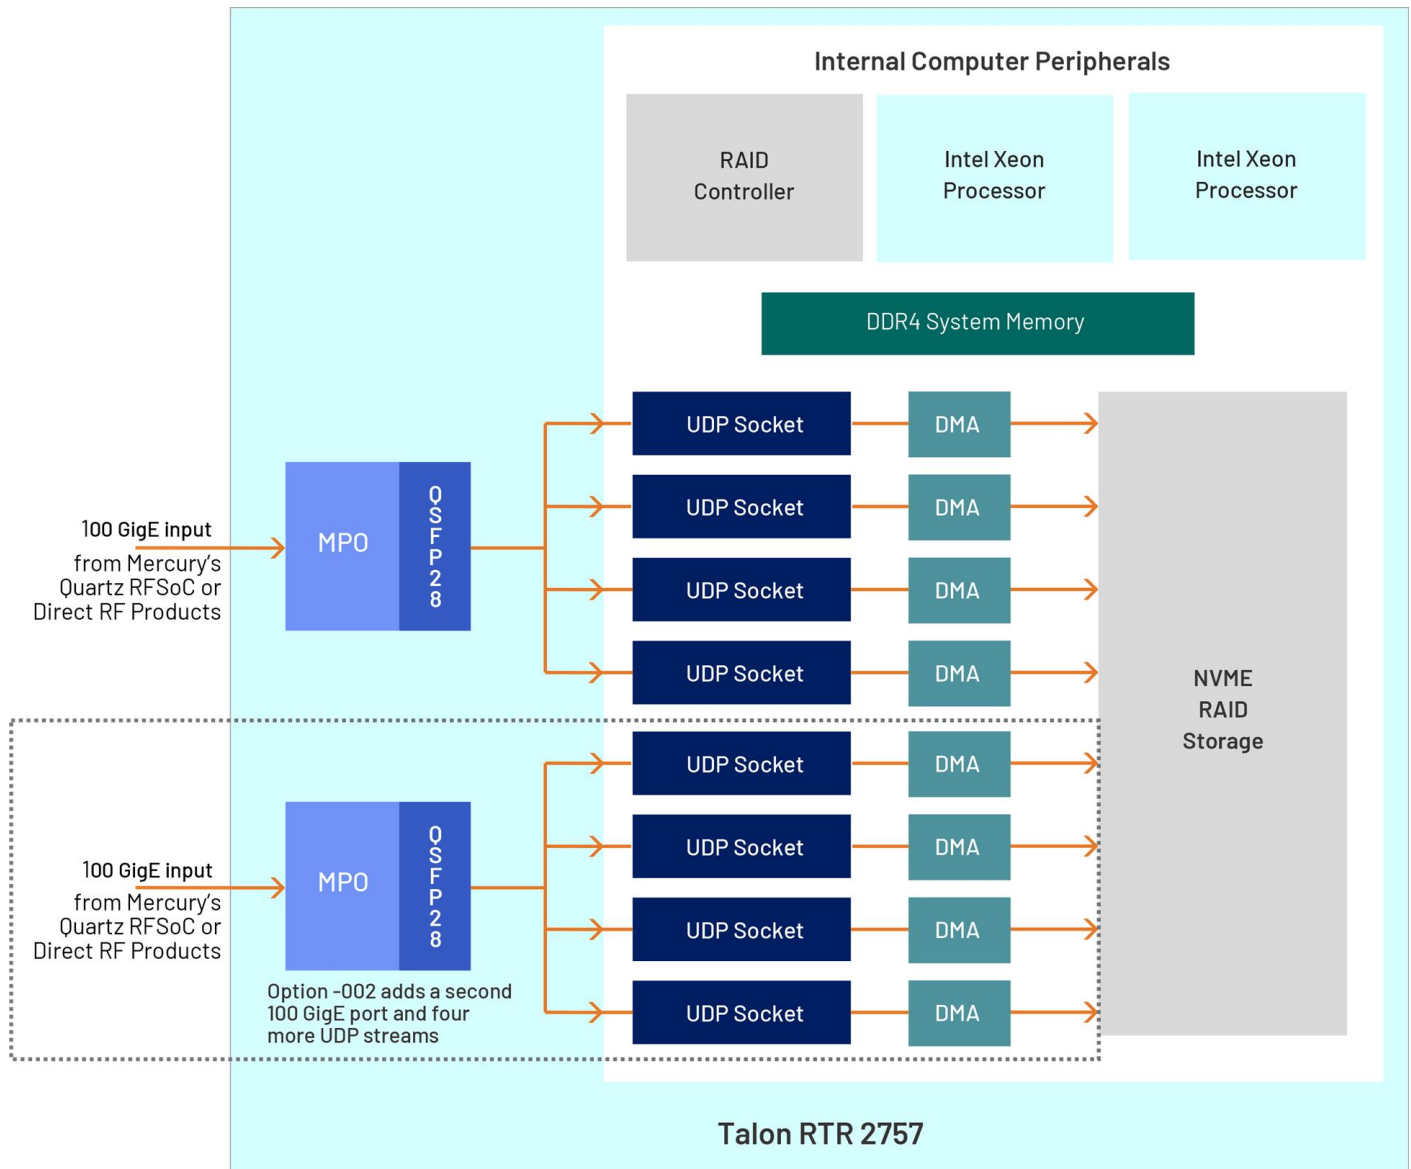


CAPTURING DATA FROM MERCURY'S DIRECT RF AND QUARTZ (RFSOC) PRODUCTS

The R2757 works with any 100 GigE-enabled Direct RF or Quartz product. Each example below shows a complete recording solution using the Quartz Model 6350 Small Form Factor rugged version and Talon RTR 2757 recorders.

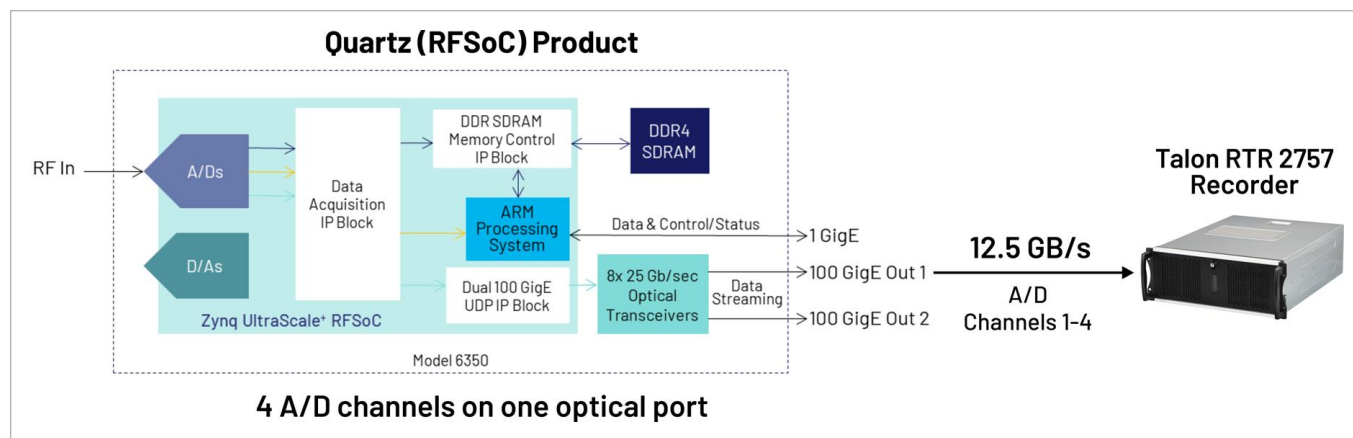

- One 100 Gigabit Ethernet port has a maximum 12.5 GB/s streaming rate.
- One standard 2757 recorder can capture real-time UDP streams at 12.5 GB/s using one QSFP28 optical port. Option -002 doubles this capacity as shown in the block diagram on the previous page.

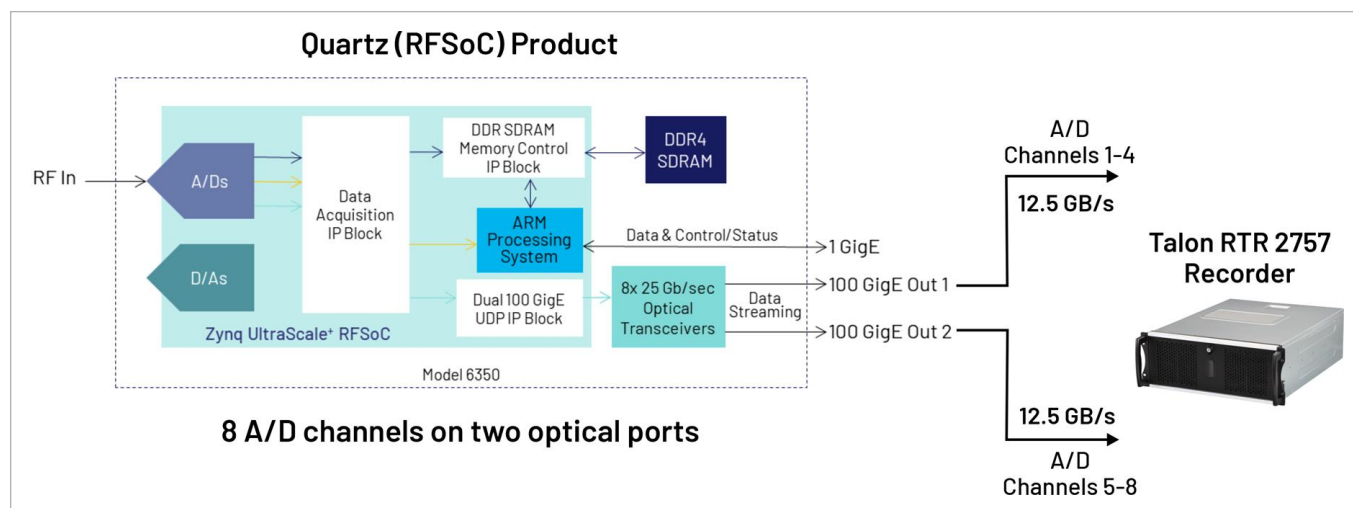

- Two 100 Gigabit Ethernet ports have a maximum 25 GB/s streaming rate.
- Two standard 2757 recorders can capture real-time UDP streams at 25 GB/s using two QSFP28 optical ports. Option -002 doubles this capacity as shown in the block diagram on the previous page.

SYSTEMFLOW SOFTWARE

All Talon recorders include the Mercury SystemFlow[®] recording software. SystemFlow software enables users to configure and control a Talon recorder:

- The SystemFlow GUI provides a point-and-click user interface. It includes Configure, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to configure parameters, control and monitor a recording, and play back a recorded stream.
- SystemFlow API provides a set of C-callable libraries that allow engineers to develop their own user interface to configure and control their Talon recorder. Additional high-level libraries, like Python, are available upon request.

The SystemFlow GUI and API can be run from a remote connection over Gigabit Ethernet. Recorders can be set up to run autonomously by implementing scripts using the API interface.

Talon systems record all data to the native NTFS file system, allowing for quick and easy access to the data from any computer. A simple header that holds the recording parameters is added to the beginning of each file. An optional GPS receiver allows the user to precisely timestamp files and optionally track the recorder's position throughout a mission.

SYSTEMFLOW SIMULATOR

To learn more about SystemFlow software, contact Mercury at techsales@mercy.com. The SystemFlow Simulator allows you to learn how to use a Talon recorder's SystemFlow software interface before you acquire a recorder or while you are waiting for delivery of a recorder.

The Simulator can simulate the operating environment of all the different Talon recorder models. The Simulator also demonstrates the SystemFlow Signal Viewer by playing recorded signals to simulate the appearance of live signals being digitized and recorded by a Talon analog signal recorder.

Features

- Provides real-time recording system simulation
- Allows engineers to write and test their application (built using the SystemFlow API) before receiving the recorder hardware
- Demonstrates SystemFlow signal and file viewer tool
- Capable of simulating all Talon analog and digital recording systems
- Full Talon SystemFlow GUI
- Simulator can be used to develop Talon system profiles for use in the final system

SYSTEMFLOW API

SystemFlow includes a complete API (Application Programming Interface) supporting control and status queries of all operations of the Talon recorder from a custom application.

High-level C-language function calls and the supporting device drivers allow users to incorporate the RTR 2757 as a high-performance server front end to a larger system. This is

supported using a socket interface through the Ethernet port, either to a local host or through an internet link for remote, standalone acquisition. Recorded NTFS files can be easily retrieved through the same connection. In addition to C, support is also provided for high level languages such as Python and C#. Below is an example of controlling recording via the SystemFlow API.

```


728     }
729     //transfer until end of disk
730     else if (transferType == TRANSFER_END_OF_DISK)
731     {
732         recordParams->transferTime    = 0;           // must set to 0
733         recordParams->transferLength  = 0;           // must set to 0
734     }
735
736     /////////////////////////////////////////////////// Start the record ///////////////////////////////////
737     SetConsoleTextAttribute (hConsole, FOREGROUND_GREEN | FOREGROUND_INTENSITY );
738     printf("\nCase 6: RTS_Record\n");
739     SetConsoleTextAttribute (hConsole, wOldColorAttrs);
740
741     //trigger immediately
742     if(recordParams->trigger == RTS_TRIGGER_IMMEDIATELY)
743     {
744         //send record command
745         if ((error = RTS_Record(++msgNum,
746                                serverInfo,
747                                recordParams,
748                                recordChanId,
749                                fileName[0])) != RTS_SUCCESS)
750         {
751             printf("Record Error # 0x%lx.\n", error);
752             exitHandler(error);
753             goto freeMem;
754         }
755
756         Sleep(500);
757     }
758
759     //wait for SW trigger
760     else if(recordParams->trigger == RTS_WAIT_FOR_SW_TRIGGER)
761     {
762         //send record command which set up record and start DMA
763         if ((error = RTS_Record(++msgNum,
764                                serverInfo,
765                                recordParams,
766                                recordChanId,
767                                fileName[0])) != RTS_SUCCESS)

```


SIGNAL VIEWER

The SystemFlow Signal Viewer includes a spectrogram, virtual oscilloscope, and spectrum analyzer for signal monitoring in both the time and frequency domains. It is extremely useful for previewing live inputs prior to recording, and for monitoring signals as they are being recorded to help ensure successful recording sessions. The viewer can also be used to inspect and analyze the recorded files after the recording is complete.

Advanced signal analysis capabilities include automatic calculators for signal amplitude and frequency, second and third harmonic components, THD (total harmonic distortion), and SINAD (signal to noise and distortion). With time and frequency zoom, panning modes, and dual, annotated cursors to mark and measure points of interest, the SystemFlow Signal Viewer can often eliminate the need for a separate oscilloscope or spectrum analyzer in the field.

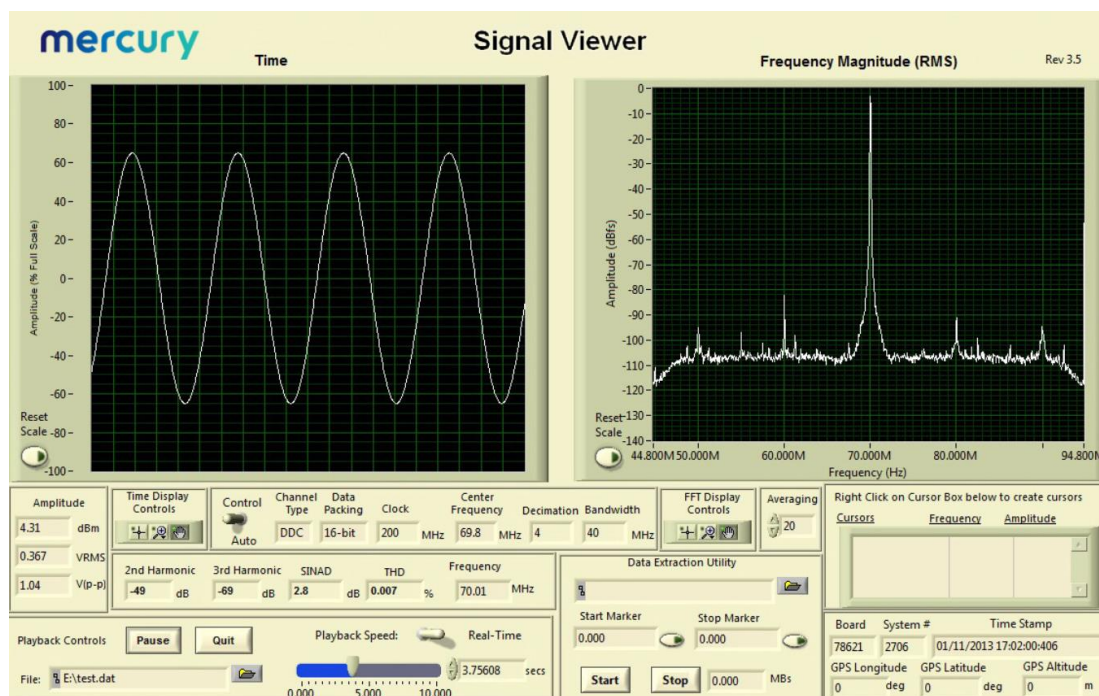

SPECIFICATIONS

PC Workstation

Operating System: Windows®

Processor: Intel Xeon processor

SDRAM: Up to 4 TB DDR4 SDRAM (64 GB DDR standard)

RAID

- Drive Type: Front-panel removable NVMe U.2 solid-state drives (SSDs)
- Storage: 15.3 to 244 TB
- Supported RAID Levels: (standard) 0
 - Option -285: RAID 5

Ethernet Interface

Quantity: 1 port (standard); 2 ports (option -002)

Connector Type: QSFP28 port with MPO transceiver

Physical and Environmental

Dimensions: 16.93" W x 22.19" D x 6.93" H; (430 x 563.7 x 176 mm)

Weight: 51 lb. approx.

Operating Temp: 0° to +50° C

Storage Temp: -40° to +85° C

Relative Humidity: 5 to 95%, non-condensing

Operating Shock: 15 g max. (11 msec, half sine wave)

Operating Vibration: 10 to 20 Hz: 0.02 inch peak, 20 to 500 Hz: 1.4 g peak acceleration

Power Requirements: 100 to 240 VAC, 50 to 60 Hz, 500 W max.

ORDERING INFORMATION

General Options

Option -002	Two optical ports
Option -010	Low-level ethernet packet capture
Option -011	Record buffer-level time stamping
Option -220	Playback capability
Option -221	Coarse playback timing reproduction
Option -268	40 GbE offload
Option -269	100 GbE offload
Option -301	Controller-based AES-256 bit encryption
Option -320	Multicast support

RAID Configurations

Standard	RAID 0 configuration
Option -285	RAID 5 configuration

Storage Options

Option -430	30.7 TB SSD RAID
Option -460	61.4 TB SSD RAID
Option -485	122.8 TB SSD RAID
Option -490	243.3 TB SSD RAID

Contact Mercury for compatible option combinations. Storage and general options may change, so contact Mercury for the latest information.

QUARTZ RFSOC PRODUCTS

Model RTR 2757 supports Mercury's Quartz RFSoc products.

Quartz Options	
VPX 3U	
Model 5550	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Processor - SOSA Aligned 3U VPX
Model 5553	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Gen 3 Processor - SOSA Aligned 3U VPX
Model 5950	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Processor - 3U VPX
Model 5953	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Gen 3 Processor - 3U VPX
Small Form Factor	
Model 6350	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Processor - SFF
Model 6350S	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Processor - SFF Subsystem
Model 6353	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Gen 3 Processor - SFF
Model 6353S	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Gen 3 Processor - SFF Subsystem
PCIe	
Model 7050	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Processor - PCIe
Model 7053	8-Channel A/D and D/A Zynq UltraScale+ RFSoc Gen 3 Processor - PCIe

DIRECT RF PRODUCTS

Model 2757 supports Mercury's Direct RF products.



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA

+1 978.967.1401 tel

+1 866.627.6951 tel

+1 978.256.3599 fax

International Headquarters

Mercury International

Avenue Eugène-Lance, 38
PO Box 584

CH-1212 Grand-Lancy 1

Geneva, Switzerland

+41 22 884 5100 tel

Learn more

Visit: mercy.com/go/MP2757

For technical details, contact:

mercy.com/go/CF2757



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

