


# AM3107 – Filter Bank

## Digitally Tunable 6.0 to 12.0 GHz Lowpass Filter




The AM3107 is a miniature digitally tunable lowpass filter covering the 6.0 to 12.0 GHz frequency range. The filter provides 16 selectable lowpass cutoff states with 4 digital control bits. The tunable lowpass filter can be combined with one of Mercury's tunable highpass filters to provide a flexible tunable bandpass filter solution. AM3107 has internal 50Ω matching, is packaged in a 4mm QFN package, and operates over the -40C to +85C temperature range.



### FEATURES

- Discrete Low Pass Cutoff Steps
- 4-bit Control, 3V or 5V Logic
- +3.3V to +5V DC Supply
- 2.0 dB AVG Insertion Loss
- +43 dBm Input IP3
- 4mm QFN Package
- -40C to +85C Operation
- No Calibration Required

### CHARACTERISTIC PERFORMANCE

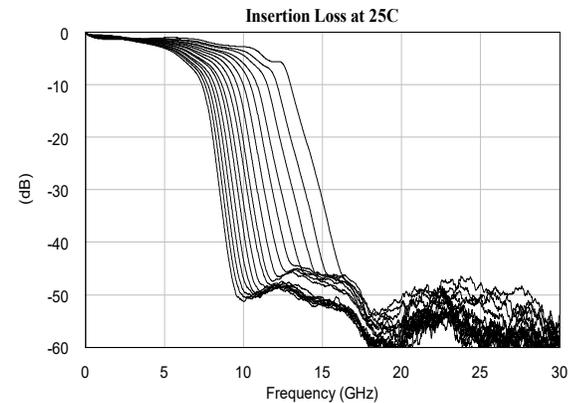

### FUNCTIONAL DIAGRAM

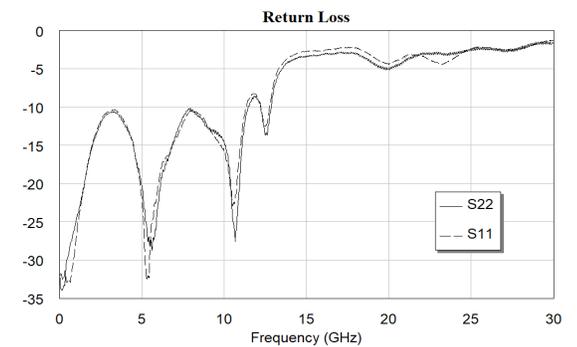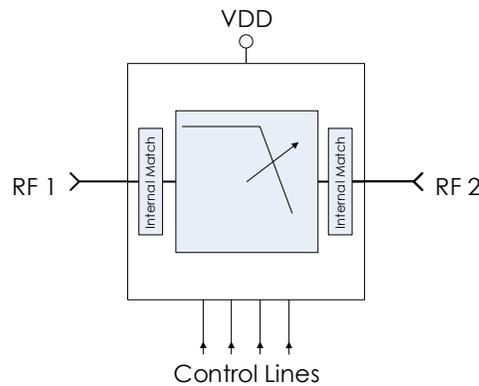

CONTENTS

FEATURES ..... 1

FUNCTIONAL DIAGRAM ..... 1

CHARACTERISTIC PERFORMANCE ..... 1

REVISION HISTORY..... 2

PIN LAYOUT AND DEFINITIONS ..... 3

SPECIFICATIONS..... 4

TYPICAL PERFORMANCE ..... 7

TYPICAL APPLICATION - MULTIPLE PASSIVES..... 8

TYPICAL APPLICATION - SMALLEST FOOTPRINT ..... 9

EVALUATION PC BOARD..... 10


RELATED PARTS..... 10

COMPONENT COMPLIANCE INFORMATION ..... 11

REVISION HISTORY

Date	Revision	Notes
August 24, 2018	1	Initial Release.
January 15, 2019	2	Added Additional Application Page.
July 3, 2024	3	Changed to Mercury branding. No content changes.
September 30, 2025	3.1	Fixed error on title page, removed old package drawing

PIN LAYOUT AND DEFINITIONS

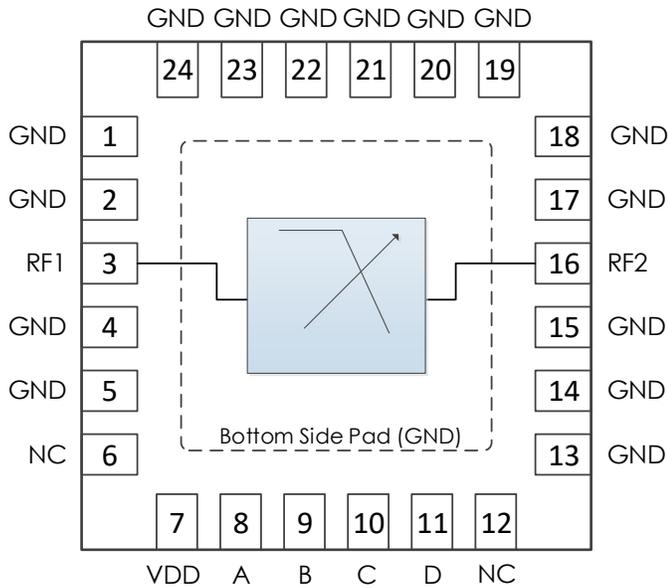

Pin	Name	Function
1, 2	GND	Ground – Common
3	RF1	RF Port 1 – 50 ohms – DC coupled. External DC blocking capacitor required*
4, 5	GND	Ground – Common
6	NC	Do Not Connect
7	VDD	DC Power Input
8	A	Control Bit A
9	B	Control Bit B
10	C	Control Bit C
11	D	Control Bit D
12	NC	Do Not Connect
13-15	GND	Ground – Common
16	RF2	RF Port 2 – 50 ohms – DC coupled. External DC blocking capacitor required*
17-24	GND	Ground – Common
Case GND	GND	Ground – Common

**\*NOTE:** DC blocking caps not required if in series with other Mercury parts of the same reference voltage.

SPECIFICATIONS

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+6.0 V
RF Input Power		+27 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-50C	+150 C

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage	+2.7 V	+5.0 V	
Operating Case Temperature	-40 C		+85 C
Operating Junction Temperature	-40 C		+125 C

**Note:** Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Devices subjected to conditions outside of what is recommended for extended periods may affect device reliability.

Handling Information

	Minimum	Maximum
Storage Temperature Range (Recommended)	-50 C	+125 C
Moisture Sensitivity Level	MSL 1	



Mercury products are electrostatic sensitive.  
Follow safe handling practices to avoid damage.

**DC Electrical Characteristics**

(T = 25 °C unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
DC Supply Voltage		+2.7 V	+5.0 V	
DC Supply Current	V Supply = +3.3 V	1 mA		2 mA
	V Supply = +5.0 V	1 mA		2 mA
Power Dissipated	V Supply = +3.3 V	3.3mW		6.6 mW
	V Supply = +5.0 V	5 mW		10 mW
Logic Level Low		-0.1 V		+0.5 V
Logic Level High		+2.0 V		Vdd

**Timing Characteristics**

Parameter	Minimum	Typical	Maximum
Switching Speed		1 μs	

**RF Performance**



(T = 25 °C, VDD = +5.0 V unless otherwise specified)

Param	Testing Conditions	Min	Typical	Max
Frequency Range		6.0 GHz		12.0 GHz
Insertion Loss	f = 10 MHz, ABCD = 1111		0.1 dB	
	f = 5 GHz, ABCD = 1111		1.0 dB	
	f = 12 GHz, ABCD = 1111		5.5 dB	
Return Loss	f = 10 MHz, ABCD = 1111		32.0 dB	
	f = 5 GHz, ABCD = 1111		21.8 dB	
	f = 12 GHz, ABCD = 1111		8.6 dB	
Input IP3	ABCD = 1111		+43 dBm	


**State Table**

Control Lines				State
D	C	B	A	
L	L	L	L	5.84
L	L	L	H	6.04
L	L	H	L	6.11
L	L	H	H	6.34
L	H	L	L	6.52
L	H	L	H	6.69
L	H	H	L	6.79
L	H	H	H	7.14
H	L	L	L	7.71
H	L	L	H	8.19
H	L	H	L	8.88
H	L	H	H	9.47
H	H	L	L	9.96
H	H	L	H	10.66
H	H	H	L	11.36
H	H	H	H	12.52

TYPICAL PERFORMANCE

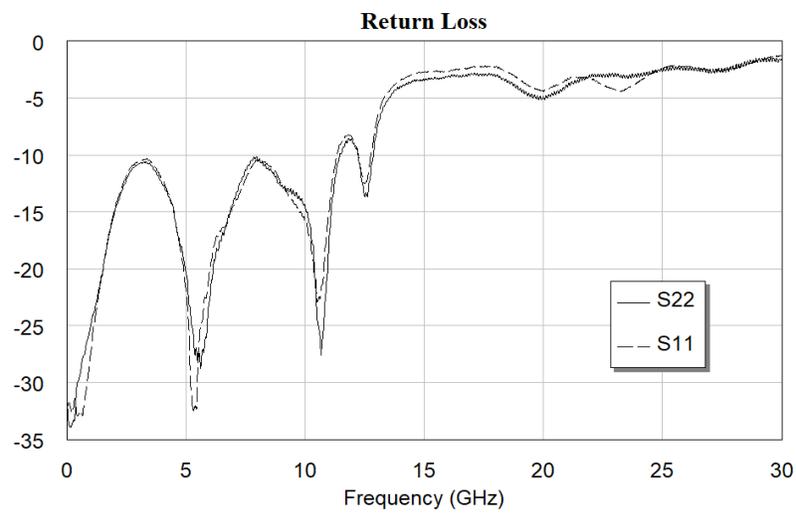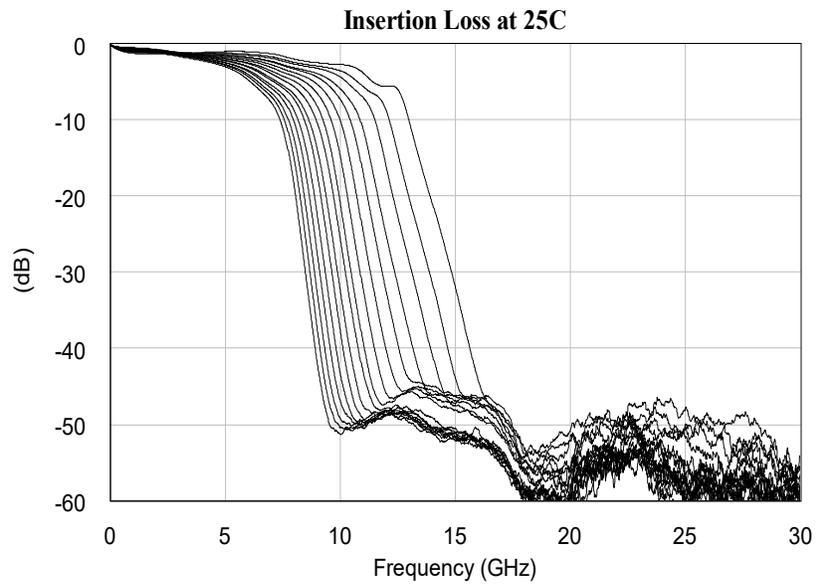

TYPICAL APPLICATION - MULTIPLE PASSIVES

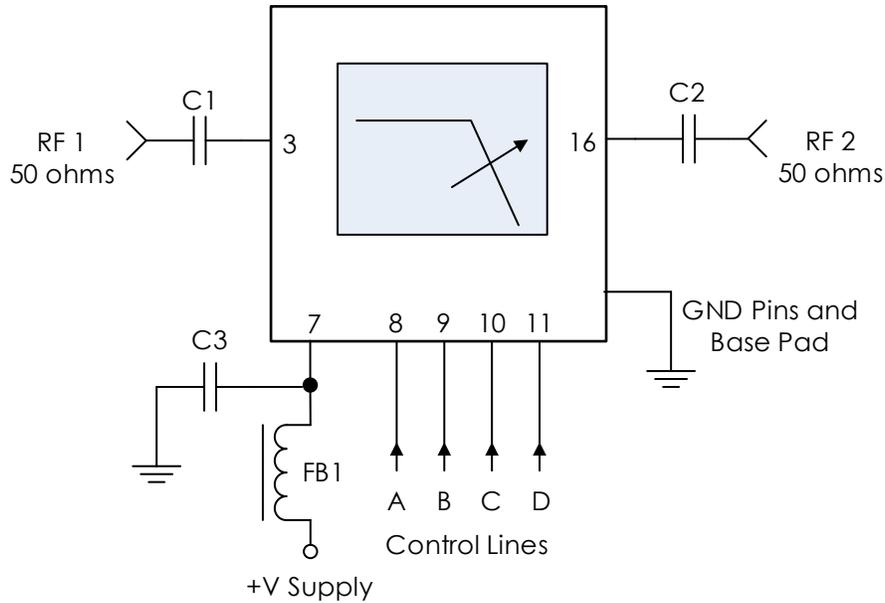


Recommended Component List (or Equivalent)

Part	Value	Part Number	Manufacturer
C1, C2	0.1 $\mu$ F	0402BB104KW160	Passives Plus
C3-C8	0.1 $\mu$ F	C1005X7R1H104K050BB	TDK
FB1	-	MMZ1005A222E	TDK

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. RC filtering on the control lines is recommended to prevent digital noise from coupling to the RF path.
  - a. Select control line RC filter values based on desired logic source decoupling and switching speed.

TYPICAL APPLICATION - SMALLEST FOOTPRINT

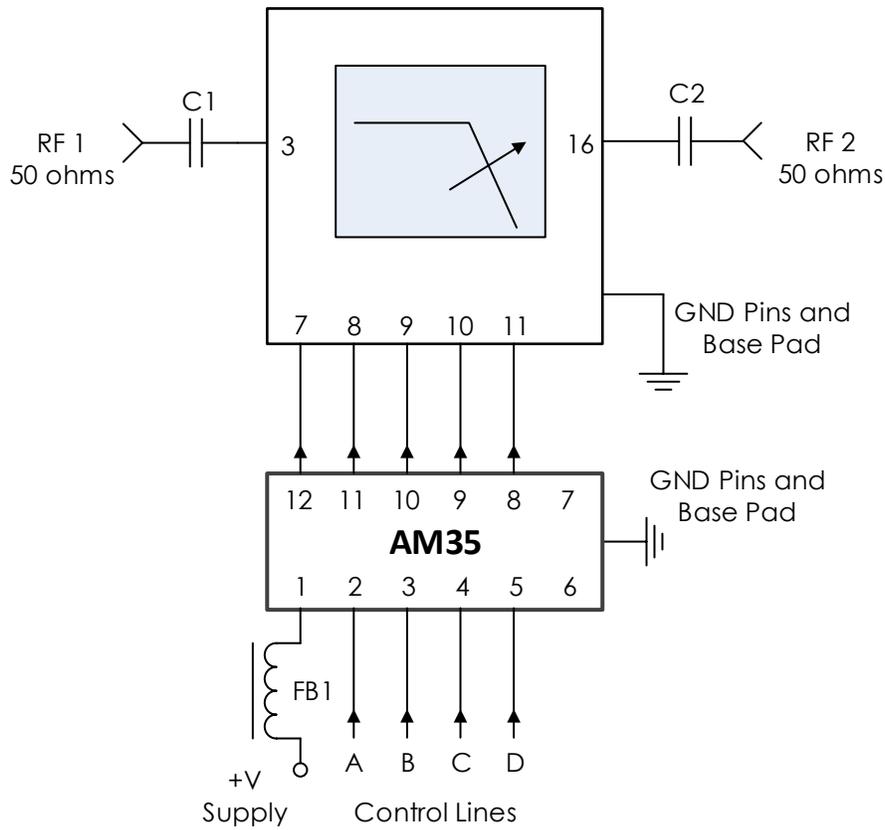


Recommended Component List (or Equivalent)

Part	Value	Part Number	Manufacturer
FB1		MMZ1005A222E	TDK

Notes:

1. RF blocking capacitors should be high performance, low-loss, broadband capacitors for optimum performance.
2. AM35 provides power and control line filtering with high frequency isolation to 50+ GHz.
  - a. See AM35 datasheet for performance details.
  - b. AM35 is 1.5mm x 3mm with 0.5mm pitch, mating perfect with this device.

EVALUATION PC BOARD

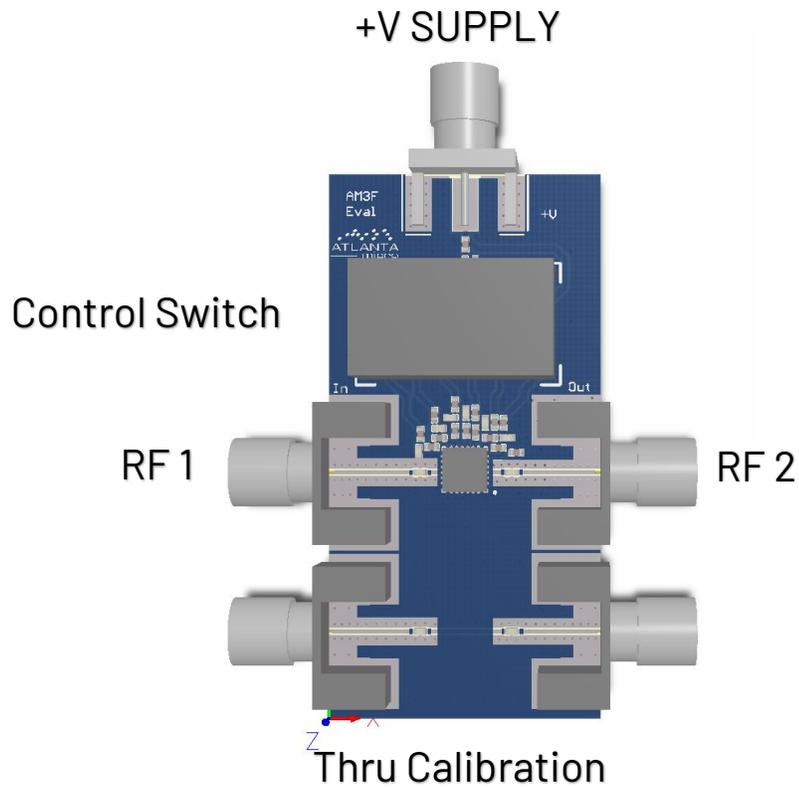

RELATED PARTS

Part Number	Description
AM3030	3.5 GHz to 6.5 GHz Digitally Tunable Lowpass
AM3039	9 GHz to 18 GHz Digitally Tunable Lowpass
AM3110	18 GHz to 26.5 GHz Digitally Tunable Lowpass
AM3032	2.5 GHz to 4.5 GHz Digitally Tunable Highpass
AM3041	6 GHz to 10 GHz Digitally Tunable Highpass
AM3108	12.0 GHz to 18.0 GHz Digitally Tunable Highpass
AM3109	18 GHz to 26.5 GHz Digitally Tunable Highpass

COMPONENT COMPLIANCE INFORMATION

**RoHS:** Mercury Systems, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Mercury shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)

**REACH:** Mercury Systems, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

**CONFLICT MATERIALS:** Mercury does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Mercury’s supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

**Mercury takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.**



**Corporate Headquarters**

50 Minuteman Road  
 Andover, MA 01810 USA  
 +1 978.967.1401 tel  
 +1 866.627.6951 tel  
 +1 978.256.3599 fax

**International Headquarters**

**Mercury International**

Avenue Eugène-Lance, 38  
 PO Box 584  
 CH-1212 Grand-Lancy 1  
 Geneva, Switzerland  
 +41 22 884 5100 tel

**Learn more**

**Visit:** [mrcy.com](http://mrcy.com)

For pricing details, contact: [MMICsales@mrcy.com](mailto:MMICsales@mrcy.com)

For technical details, contact: [MMICsupport@mrcy.com](mailto:MMICsupport@mrcy.com)



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury’s internal processes and methods. The information contained in this document is subject to change at any time without notice.

