


TGA-7000 Graphics Adapter

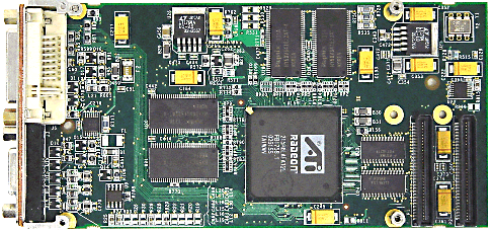

High Performance, Low Cost PMC 2-D Graphics Adapter with Dual-Display Support


Themis' TGA-7000™ graphics accelerator is a high-performance, low-cost, 2-D graphics solution. Offered in a PMC form factor, the TGA-7000 utilizes the ATI Radeon 7000 graphics chip and operates with Themis' TA64™ VMEbus single-board-computer.

The TGA-7000 provides users in Solaris™, Linux®, and Windows® -based environments high screen resolutions, up to 1920 x 1200, while displaying up to 16.7 million colors. A DVI digital connector provides support for Panellink compatible displays. In addition, a VGA port provides connection to analog CRT and analog flatpanel monitors.

HD-15 and DVI-I video connectors provide users with both digital and analog video outputs as well the ability to drive two displays at up to 1280x1024 resolution.

TGA-7000 Features

- ATI Radeon 7000 graphics engine
- Low cost graphics adaptor provides 2-D, 24-bit color graphics
- 64MB DDR SDRAM
- 32-Bit, 33-/66-MHz
- Triple 8-bit palette DAC supports pixel rates up to 350 MHz
- Dual-display and high resolution support
 - 24-bit support for up to 1280 x 1200 resolutions @ 75 Hz
- Open GL compatible
- Designed for TA64 processor card
- Operating resolutions:
 - Single display - 640x480 to 1920x1200 (24-bit)
 - Dual display - 640x480 to 1280x1024
- Solaris 9 and 10, Linux and Windows support

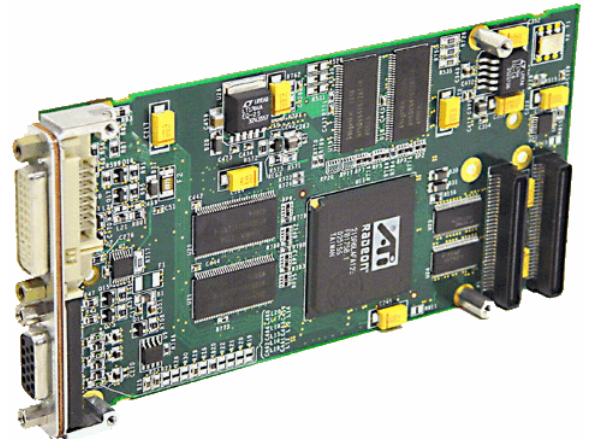

TGA-7000 Specifications

- PMC Form Factor
- PCI version 2.2 with full bus mastering and scatter/gather support
- Triple 8-bit palette DAC supports pixel rates up to 350MHz
- Two independent CRT controllers to support two asynchronous simultaneous display paths
- DDC1 and DDC2B+ for plug and play monitors
- Single channel 128-bit memory interface using SDRAM to build 64MB configurations (Operating frequency is 67MHz minimum to 183MHz maximum, SDR or DDR)
- Video Connectors: VGA Analog
 - HD15
 - DVI digital
- Shock (Operating): up to 40G @ 20 ms
- Vibration (Operating): 0.5g from 4 – 50Hz (Non-Operating) 1.0g from 4 – 50Hz
- Temperature Range (Operating): -5 - 55°C
- Temperature Range (Non-Operating): -40 - 85 °C
- Humidity: 10 – 95% non-condensing
- Power Reqts.: +5V (± 5%) @ 1.2 Amps maximum
- Power Consumption: 6Watts
- Dimensions (HxD): 2.952" (75mm) x 5.905" (150mm)
- Weight: approximately 3.5 oz.
- Operating resolutions – 640x480 to 1920x1200 (1280x1024 on DVI port)
- Solaris 9 and 10, Linux, and Windows Operating Environment support
- OpenGL

Themis Computer TGA-7000 Graphics Adapter



THEMIS

Themis

47200 Bayside Parkway
Fremont, CA 94538

Tel: 510-252-0870

Fax: 510-490-5529

Email: info@themis.com

www.themis.com

Themis Europe Sales Office

5 rue Irène Joliot-Curie

38320 Eybens, France

Tel: +33.476.14.77.86

Fax: +33.476.14.77.89

Themis, the Themis logo, TA64, and TGA-7000 are trademarks or registered trademarks of Themis Computer. Sun, Sun Microsystems, the Sun logo, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. UNIX is a registered trademark of The Open Group. Windows is a registered trademark of Microsoft Corporation. All trademarks and registered trademarks are the property of their respective owners.