

High Power SPDT Switch ES0013




Specifications are subject to change without notice

Specifications (+25°C)

Parameter	Value
RF Frequency	8 GHz to 18 GHz
Peak Power	300 Watts Max
Average Power	40 Watts Max
Duty Cycle	12 % Max
Pulse Width	10 uSec Max
Load VSWR	2.5:1 Max
VSWR	2:1 Max
Switching Speed	200 ns Max
Positive Supply	5 Vdc 350 mA
Negative Supply	-28 Vdc
Power	150 mA

Parameter	Value
RF Connector	SMA-F
Bias Connector	Solder Pins
Control Connector	SMA-F
Control	TTL
Storage Temperature	-55 to 125 °C
Operating Temperature	-20 to 68 °C
Altitude	10000 ft (Max)

Outline Drawing

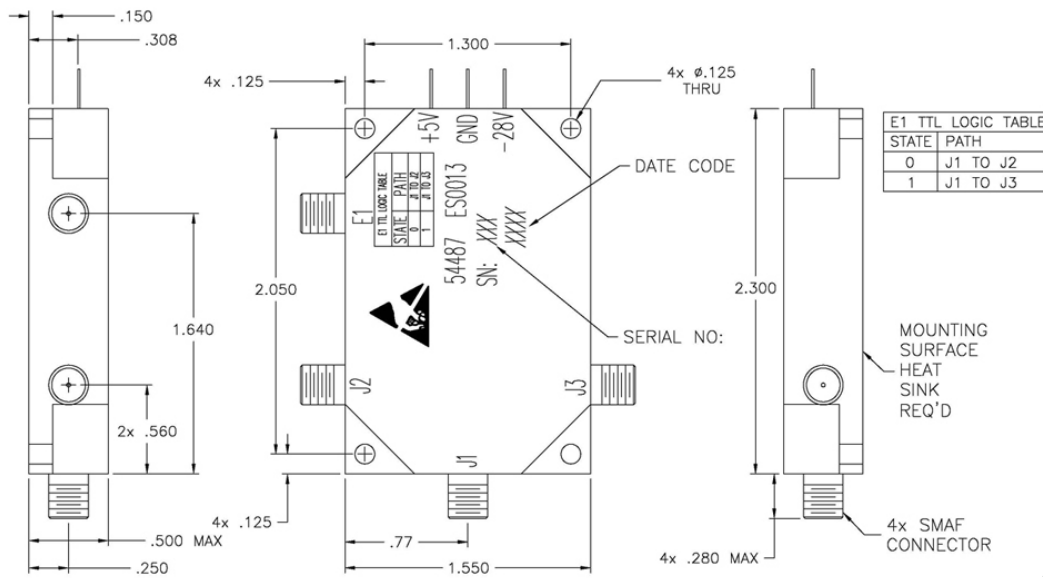

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com