

GPS Filter Amplifier L54129




Specifications are subject to change without notice

Electrical Specifications (+25°C)

Parameter	Value
Passband	1575.42 +/- 8 MHz
3 dB Bandwidth	+/- 10 MHz min
Gain	25 +/- 2dB
Gain Flatness	+/- 0.5 dB
Noise Figure	1.5 dB max, 1.0 typ
Gain Compression	+10 dBm min
VSWR (input)	1.3:1
VSWR (output)	1.5:1
Rejection	50 dB from 1315 to 1495 MHz
Rejection	50 dB from 1625 to 2000 MHz
DC Requirements	+7 to +32 VDC @ 60 mA max (via output connector)
L2 reference port	1227.6 MHz. < 1.0 dB loss > 2:1 VSWR
Connectors	SMA Female

Outline Drawing

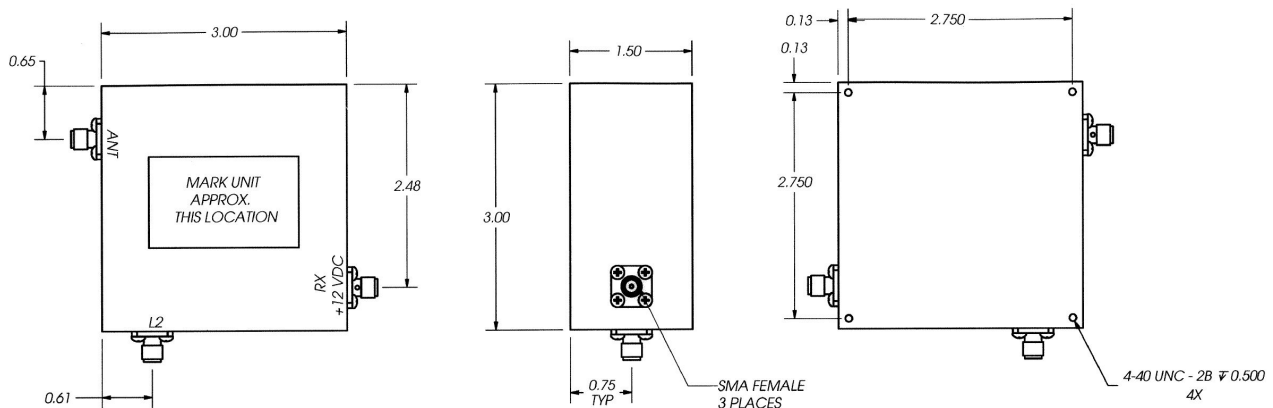

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com

6764.00E-0718-SS-L54129-filter