

GPS Filter Amplifier L54138




Specifications are subject to change without notice

Electrical Specifications (+25°C)

Parameter	Value
Passband	1575.42 +/- 10MHz
Gain	25 +/- 3 dB
Noise Figure	2.9 dB Maximum
VSWR	1.5:1 (Input) 2:1 (Output)
Rejection	40 dB @ 1540 MHz
Rejection	40 dB @ 2200 MHz
DC Power	+8 to +32 VDC @ 100 mA Max
CD Connection	M83513/03-AIIN Micro D-Sub
Connectors	SMA Female

Outline Drawing

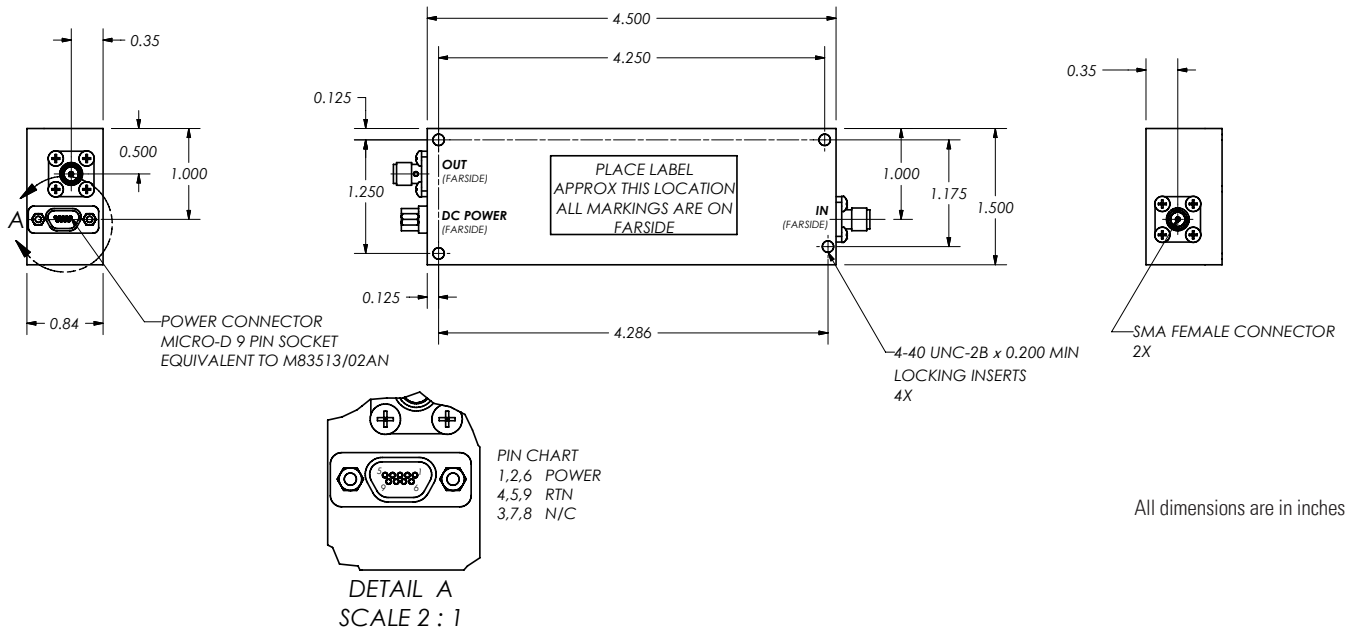

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com