

High Reliability GPS Filter/Amplifier L5475-1



Specifications are subject to change without notice

Specifications (+25°C)

| Parameter | Value |
|--------------|----------------------------|
| Passband | 1575 +/- 10 MHz |
| Gain | 25 +/- 3 dB |
| Noise Figure | 2.5 dB |
| VSWR | 1.5:1 (Input) 2:1 (Output) |
| Rejection | 40 dB @ 1540 MHz |
| Rejection | 40 dB @ 1626 MHz |
| Voltage | +7 to +35 VDC |
| Connectors | SMA Female |
| Package Size | 0.75" x 1.5" x 4.5" |




Features

- Cavity Design
- Low Loss

Applications

- Booster
- Airborne
- Missile Defense
- Targets
- Test Equipment

Outline Drawing

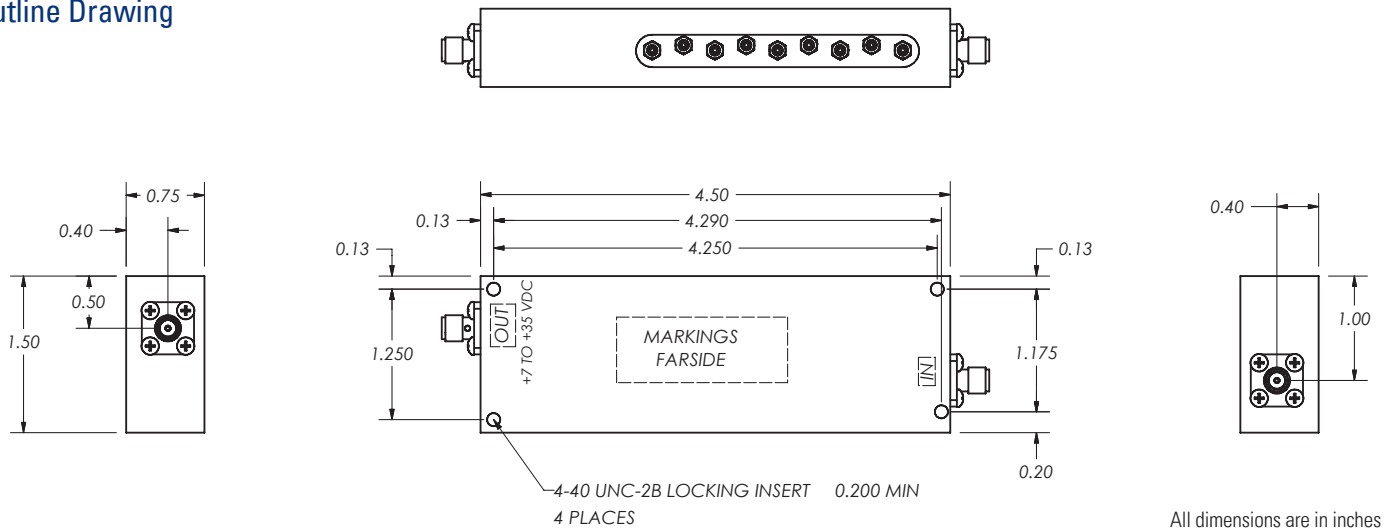

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com