

High Power Noise Source

NMA-2514-1T




Specifications are subject to change without notice

Specifications

Parameter	Value
RF Frequency	100 MHz to 6000 MHz
Noise Output	74 dB Min ENR
Noise Spectral Density (N_0)	-100 dBm/Hz Min
Noise Power (N)	-3 dBm
Flatness	4 dB P-P Max
Peak Factor	5:01
Bias Voltage	5 and 12 V
Supply Current	5.0 +/- .1 v @ 300 mA Max 11.8 - 18v @ 25 mA Max
Impedance	50 ohms
Construction	Coaxial
Package Type	T Package
Connector Type	SMA(F)
Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 95 °C

Package Outline

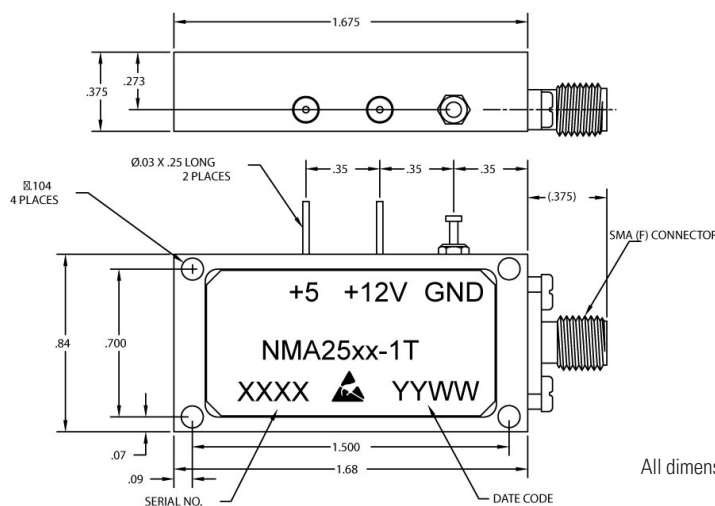

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com

7247.00E-0219-SS-NMA-2514-1T-noise