

Surface Mount Isolator SMD1900-T0204




Specifications are subject to change without notice

Specifications

Parameter	Value
RF Frequency	2.9 GHz to 3.7 GHz
Type	2-Port Isolator, SMD
Isolation	20 dB (min)
Insertion Loss	0.7 dB (max)
VSWR	1.20:1

Outline Drawing

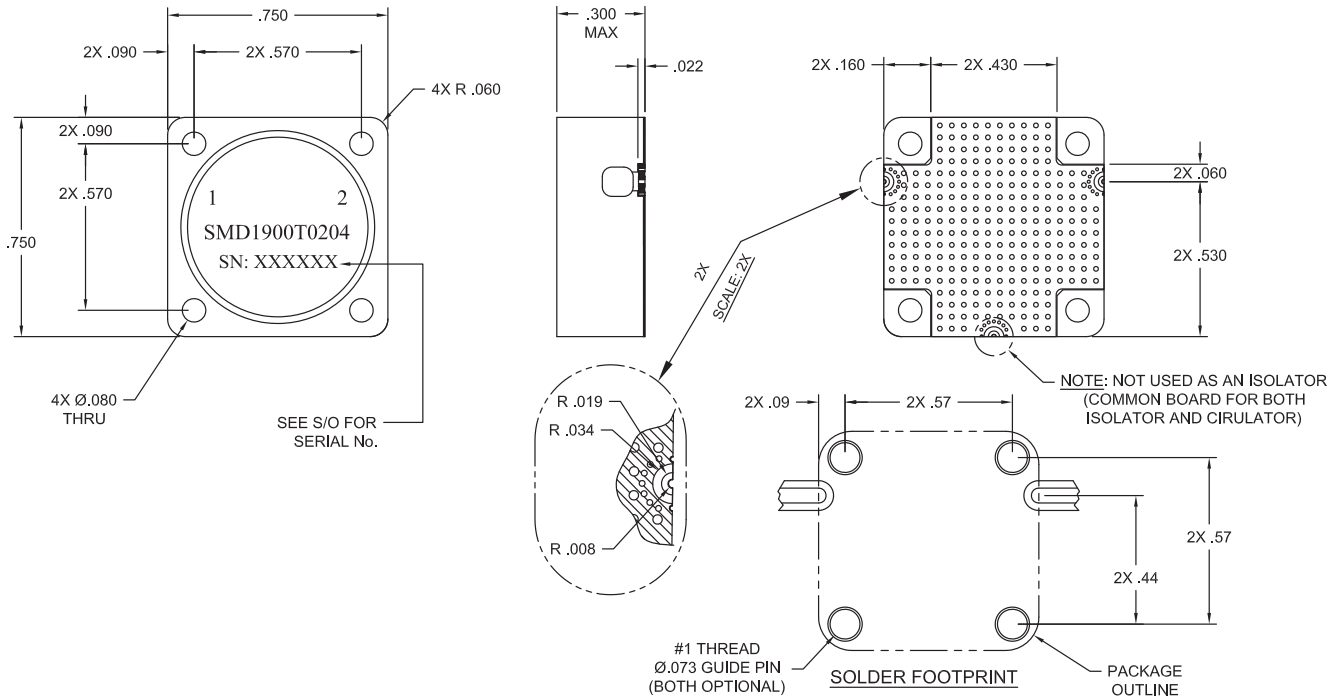

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com