

Band-Pass Filter

U1969





Specifications are subject to change without notice

Specifications (+25°C)

Parameter	Value
Passband	216 to 408 MHz
Insertion Loss	1.5 dB
VSWR	1.5:1
20 dB Bandwidth	290 MHz Maximum
40 dB Bandwidth	320 MHz Maximum
60 dB Bandwidth	360 MHz Maximum
Rejection	80 dB from 0.1 to 100 MHz
Rejection	80 dB from 550 to 4000 MHz
Rejection	40 dB @ 450 MHz
Power Handling	32 Watts CW
Passband Phase	+/- 5 degrees any 20 MHz slice
Connector	SMA Female

Outline Drawing

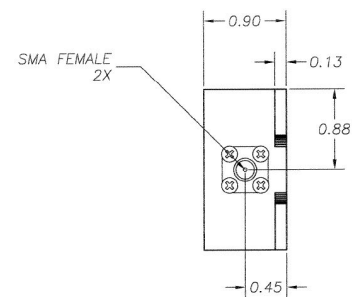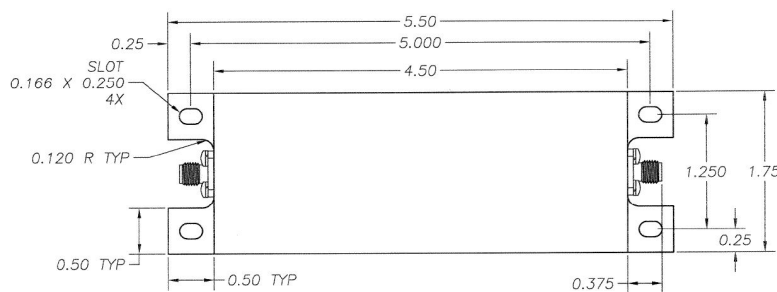

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com

6756.00E-0718-SS-U1969-filter