

Broadband Microwave Coaxial Noise Source

NST26-A




Specifications are subject to change without notice

Specifications

Parameter	Value
RF Frequency	100 MHz to 7 GHz
Noise Output	24 dB ENR
Noise Spectral Density (N_0)	-150 dBm/Hz
Peak Factor	5:01
Bias Voltage	28 V
Supply Current	25 mA Max
Impedance	50 ohms
Construction	Coaxial
Connector Type	SMA(F)
Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

Outline Drawing

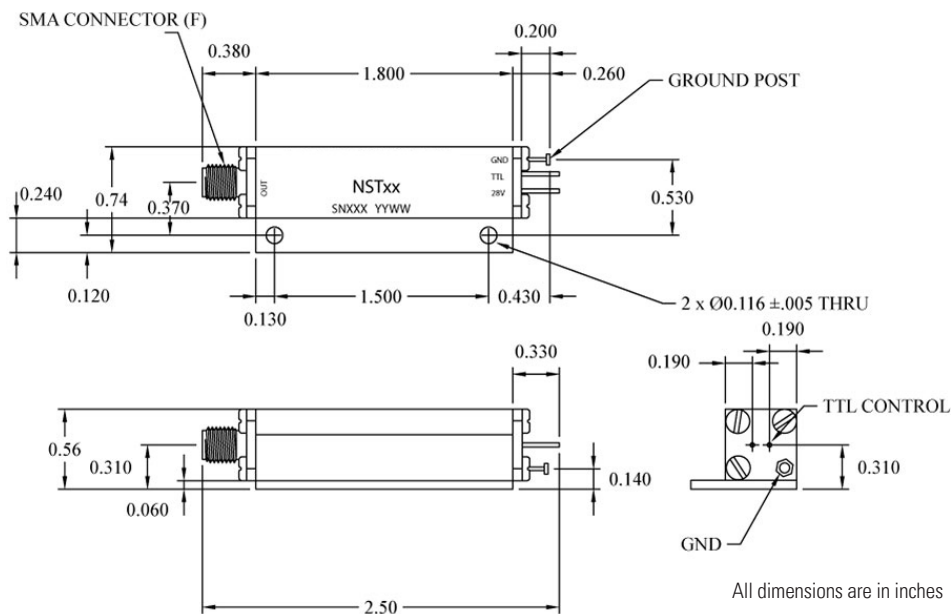

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com

6873.00E-0718-SS-NST26-A-Noise