

Low Noise Amplifier

DM-LNX-45-101



Specifications are subject to change without notice

Electrical Specifications (+25°C)

Parameter	Value
Frequency	9.5 to 10.5 GHz
Small Signal Gain	45 dB min
Flatness	±1.0 dB max
Noise Figure	1.1 dB max
P1dB	+10 dBm min
IP3	+20 dBm nom
VSWR (input/output)	1.4:1 nom
DC Power	+12 to +15 VDC, 190 mA nom
Max Input Power	+13dBm CW

Features

Internal Voltage Regulator
Reverse Voltage Protection


Environmental Specifications (by design)

Parameter	Value
Operating Temperature	-40 to +85°C
Storage Temperature	-54 to +85°C
Relative Humidity	IAW MIL-STD-810F, up to 95%
Altitude	up to 30,000 ft
Shock	IAW MIL-STD-202G method 214, condition C

Mechanical Specifications

Parameter	Value
Size (L x W x H)	1.5" x 0.71" x 0.38"
Connectors (In/Out)	SMA female
Housing Material	Aluminum
Sealing	Hermetic
Cooling	External heatsink (not included)

Outline Drawing

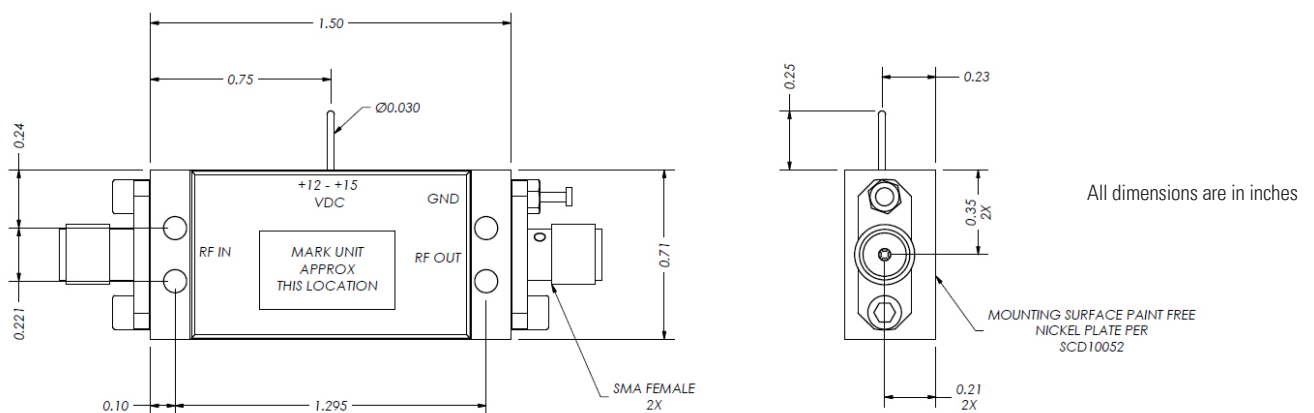

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@rcy.com or visit www.rcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.rcy.com

6963.00E-1018-SS-DM-LNX-45-101-amp