

Diplexer Ku5606



Specifications are subject to change without notice

Electrical Specifications (+25°C)

Parameter	Value	
	Channel 1	Channel 2
Passband	14400 to 14830 MHz	15150 to 15350 MHz
Insertion Loss	1.5 dB Maximum	1.5 dB Maximum
VSWR	1.5:1 Maximum	1.5:1 Maximum
Rejection	40 dB from 15150 to 15350 MHz	40 dB from 14400 to 14830 MHz
Power Handling	5 Watts	5 Watts
Connectors	SMA Female per MIL-C-39012 Optional Solder Pins	
Operating Temperature	-40° to +70° C	
Package Size	0.4" x 1.4" x 2.1"	


Features

- Compact
- Light Weight
- Optional Solder Pin Interface
- High Power
- Low Loss

Applications

- Tactical Common Data Link (TCDL)
- Test Equipment

Outline Drawing

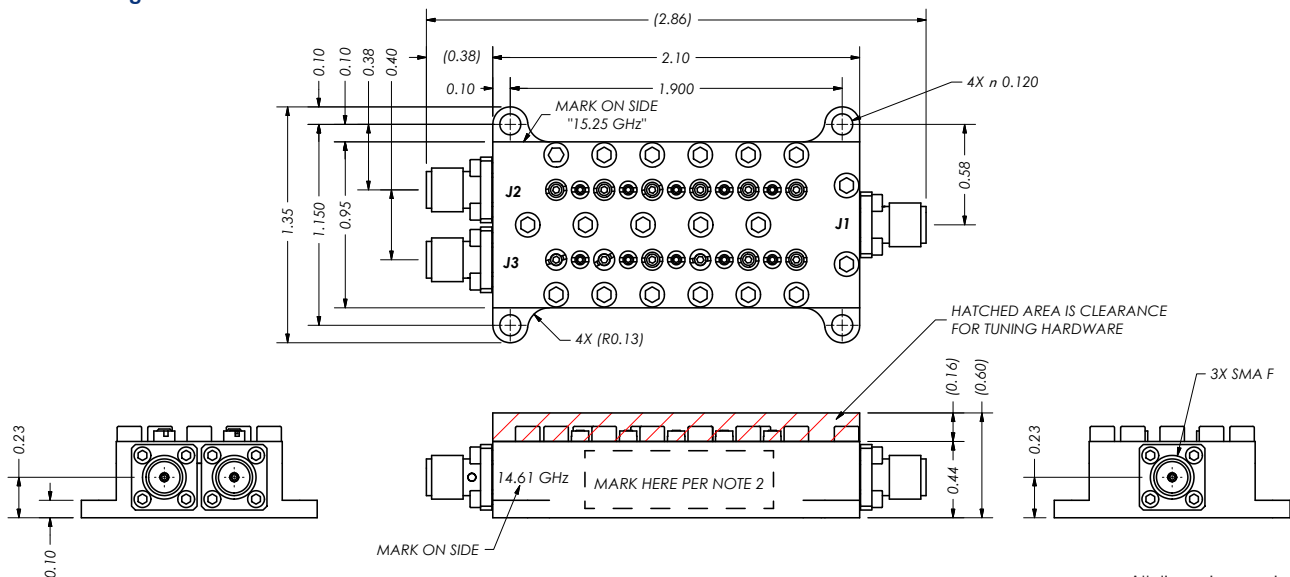

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com