

# Surface Mount Circulator SMD1300-C0401




Specifications are subject to change without notice

## Specifications

Parameter	Value
RF Frequency	4 GHz to 5 GHz
Isolation	15 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.25:1
Power Handling	10 Watts (max)

## Outline Drawing

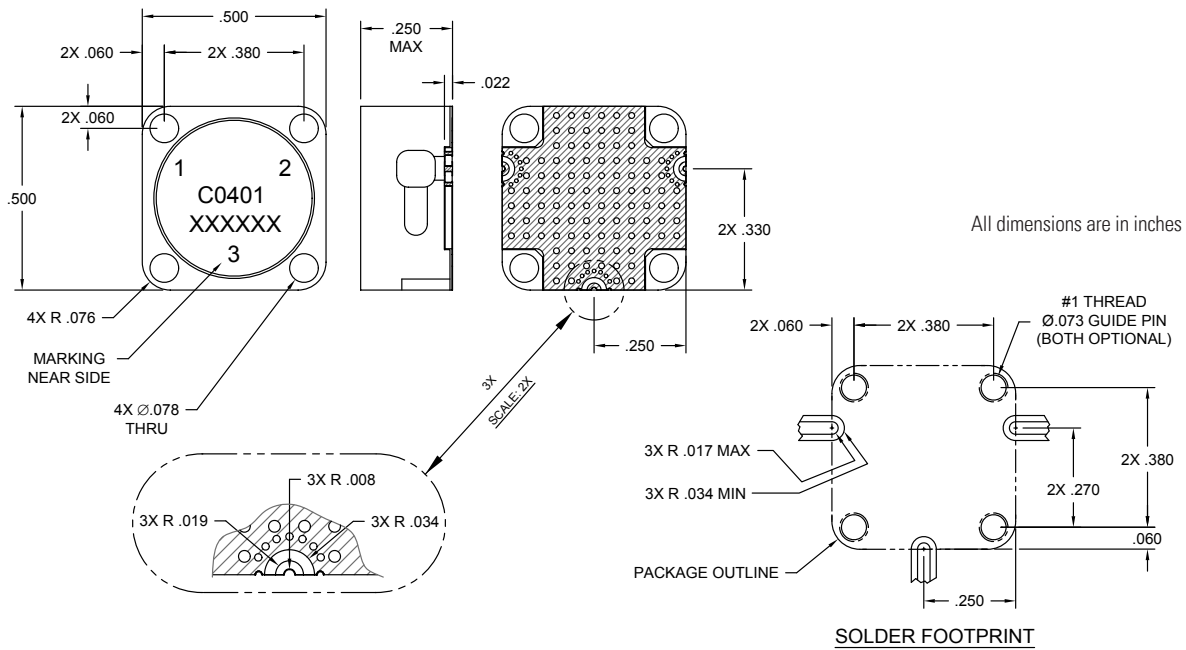

### Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at [rf.microwave@mrcy.com](mailto:rf.microwave@mrcy.com) or visit [www.mrcy.com/rf](http://www.mrcy.com/rf) for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • [www.mrcy.com](http://www.mrcy.com)