High-Speed Switch SP1T Absorptive



The Mercury Systems PIN diode SP1T switch family spans the frequency range of 0.5 – 18 GHz. It offers high performance and an integrated high speed driver controlled by TTL or CMOS signals. This switch will maintain high performance as a drop-in device for system or subsystem requirements. The Mercury Systems family of high performance switches is available in military or non military versions, hermetic and non-hermetic.

Applications

EW systems Communications systems Antenna/Filter Selectors

Features

Broadband units Environmentally sealed -55° C to +95° C operation Shock/vibration/acceleration capable

nercur systems

Specifications are subject to change without notice

SP1T Specifications

Band	Frequency GHz	Reflective			Absorptive			Switching Speed
		Insertion Loss (dB MAX)	VSWR (MAX)	Isolation (dB MIN)	Insertion Loss (dB MAX)	VSWR (MAX)	Isolation (dB MIN)	(nS MAX)
1	0.5 - 2	1.4	1.6	80	1.5	1.6	80	100
2	2 - 6	1.3	1.7	70	1.4	1.7	75	100
3	6 - 18	2.4	2.0	60	2.8	2.0	65	100
4	2 - 18	2.7	2.0	60	2.9	2.0	65	100
5	0.5 - 18	2.8	2.0	60	3.0	2.0	65	100

Power Supply Option

Code ± 5%	Α	В	С	Current (mA MAX)
+V	+5V	+5V	+12 to +15V	50
-V	-5V	-12 to -15V	-12 to -15V	50

Control Logic Option

Control Logic	Switch State			
Control Logic	Normal N	Inverting I		
TTL 0	Ins. Loss	Isolation		
TTL 1	Isolation	Ins. Loss		

Specifications


Switching Speed measured from 50% control to 10/90% RFMax. RF Power (Operational/Survival)0.5W / 1WStorage Temperature-65° to +150°CFinishGray Epoxy Paint per MIL-C-22750Weight1 oz. Max

Ordering Information





Outline Drawing

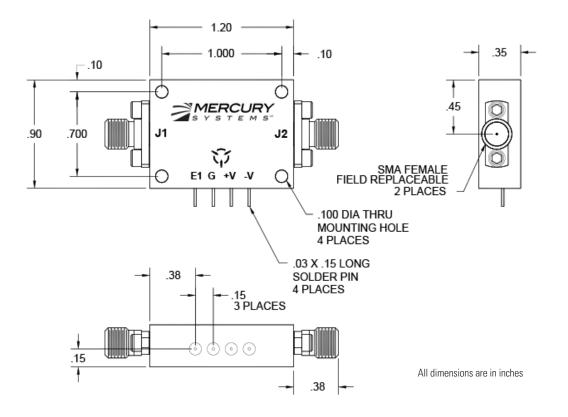

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com