

Surface Mount Noise Source

NC504SM-12




Specifications are subject to change without notice

Specifications

Parameter	Value
RF Frequency	200 kHz to 3.5 GHz
Noise Output	31 dB Min ENR
Noise Spectral Density (N_0)	-143 dBm/Hz Min
Flatness	2 dB P-P Max
Peak Factor	5:01
Bias Voltage	12 V
Supply Current	10 mA Max
Impedance	50 ohms
Construction	Axial Lead
Operating Temperature	0 to 70 °C
Storage Temperature	-65 to 125 °C

Outline Drawing

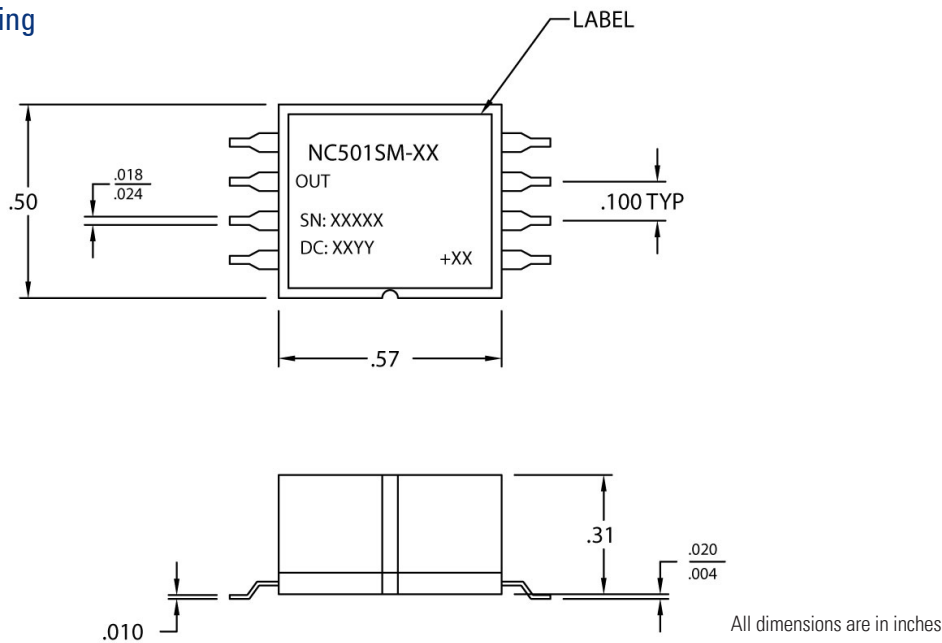

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com