

Coaxial Isolator T-000S30




Specifications are subject to change without notice

Specifications (+25°C)

Parameter	Value
RF Frequency	0.81 GHz to 0.83 GHz
Isolation	23 dB (min)
Insertion Loss	0.3 dB (max)
VSWR	1.2:1
Peak Power	1000 Watts (max)
Average Power	75 Watts (max)
Power Forward	75 Watts
Power Reverse	10 Watts
Operating Temperature	-30 to 75 °C
Package Size	1.00 x 1.00 x 0.50"

Outline Drawing

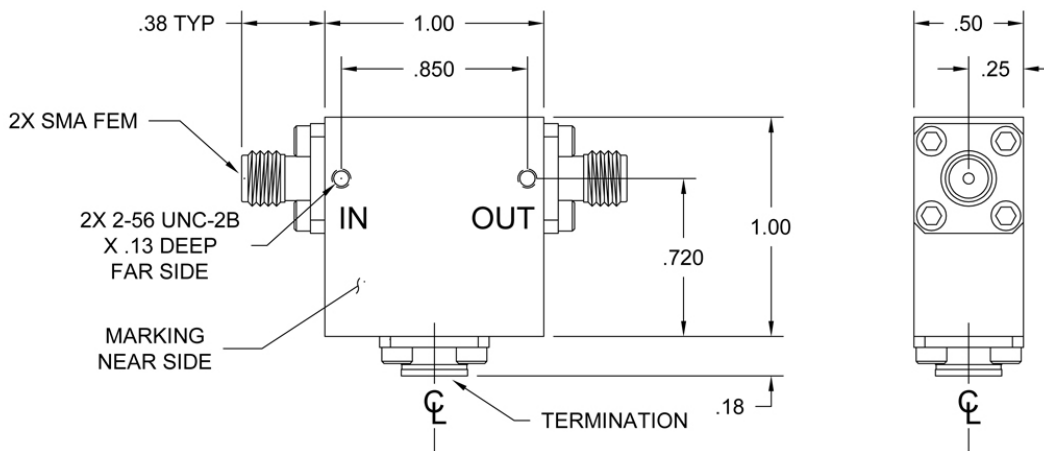

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com