

# Band-Pass Filter U1393




Specifications are subject to change without notice

## Specifications

Parameter	Value
Passband (fc)	174 MHz
3 dB Bandwidth	25 to 40 MHz
Insertion Loss	1 dB
VSWR	1.4:1
Bandwidth @ 30 dB	< ±80 MHz
Time Delay	8 ns max (fc ±10 MHz)
Connectors	Surface Mount
Operating Temperatures - A	-55C to +85C
Operating Temperatures - B	-40C to +85C
Package Size	1.5" x 7.0" x 0.37"

## Outline Drawing

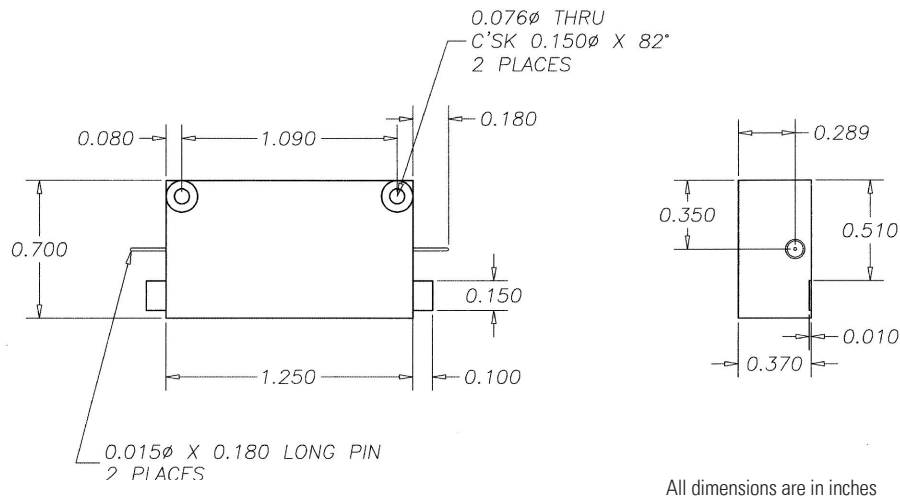

### Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at [rf.microwave@mrcy.com](mailto:rf.microwave@mrcy.com) or visit [www.mrcy.com/rf](http://www.mrcy.com/rf) for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • [www.mrcy.com](http://www.mrcy.com)