

High-Power CW Amplifier L3236-38




Specifications are subject to change without notice

Electrical Specifications (+25°C)

Parameter	Value
Frequency Start (GHz)	32
Frequency Stop (GHz)	36
Psat (dBm)	38
Psat (W)	6.3
P1dB (dBm)	37
Gain (dB)	40
Voltage (V)	12
Current (A)	17

Outline Drawing

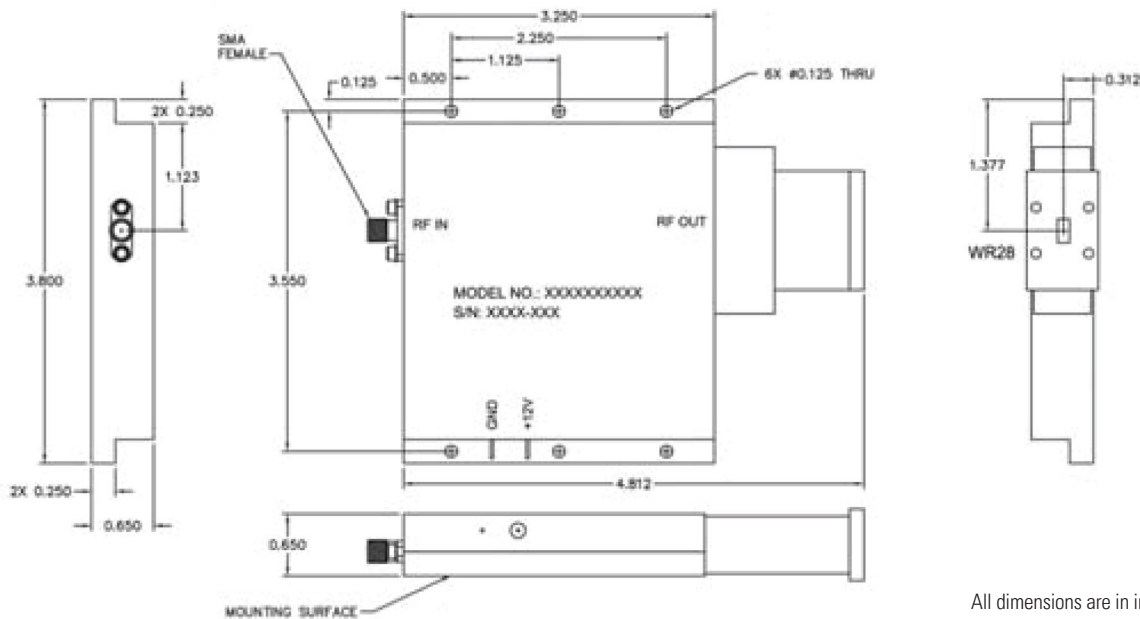

All dimensions are in inches

Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at rf.microwave@mrcy.com or visit www.mrcy.com/rf for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • www.mrcy.com