

# Band-Pass Filter

## L1953




Specifications are subject to change without notice

### Specifications

Parameter	Value
Passband 1	0.1 – 910 MHz
Passband 2	1680 – 1820 MHz
Insertion Loss	0.3 dB
VSWR	1.5:1
Isolation	50 dB Minimum
RF Power	50 Watts CW
Connectors	APC 7mm
DC Bypass	Ant to Passband port #1
Size (L x W x H)	1.5" x 1.63" x 14.0"

### Outline Drawing

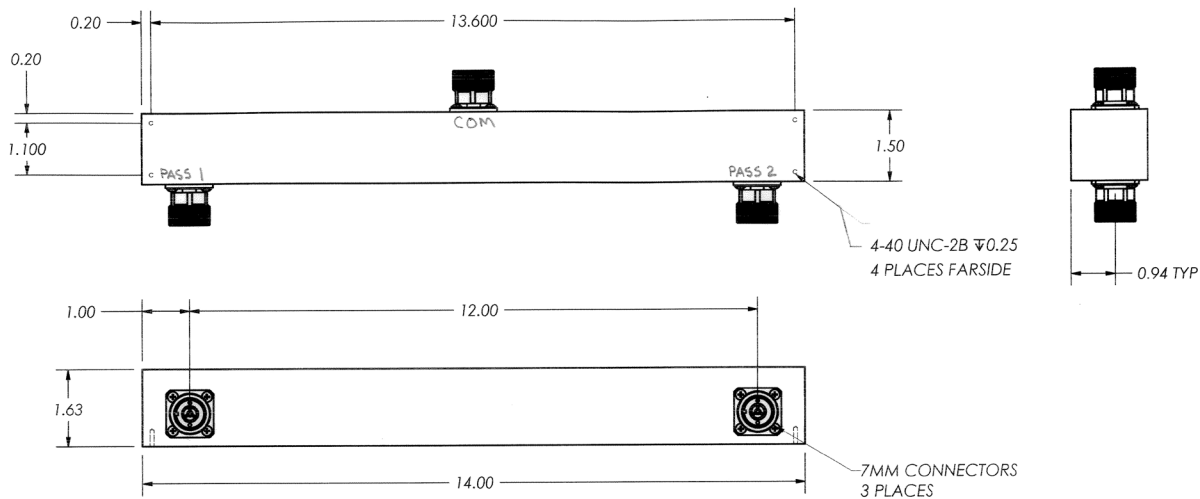

All dimensions are in inches

### Need More Help? Need a Variant of This Product?

Contact Mercury's RF & Microwave engineering team at [rf.microwave@mrcy.com](mailto:rf.microwave@mrcy.com) or visit [www.mrcy.com/rf](http://www.mrcy.com/rf) for a detailed listing of RF and Microwave products.



Corporate Headquarters • 50 Minuteman Road • Andover, MA 01810 USA • (978) 967-1401 • (866) 627-6951 • Fax (978) 256-3599 • [www.mrcy.com](http://www.mrcy.com)

6744.00E-0718-SS-L1953-filter